

# Airborne EM and numerical modelling

- [FRESHEM Zeeland](#) ( FRESH Salt groundwater distribution by Helicopter ElectroMagnetic survey in the Province of Zeeland, The Netherlands
- [Video: The challenge of saline groundwater](#)
- **Poster** Airborne Geophysics: a powerful tool to start up fresh groundwater management in the coastal zone [download](#)
- **Artikelen:**
  - Delsman, J., Van Baaren, E.S., Siemon, B., Dabekaussen, W., Karaoulis, M.C., Pauw, P., Vermaas, T., Bootsma, H., De Louw, P.G.B., Gunnink, J.L., Dubelaar, W., Menkovic, A., Steuer, A., Meyer, U., Revil, A., Oude Essink, G.H.P., 2018. Large-scale, probabilistic salinity mapping using airborne electromagnetics for groundwater management in Zeeland, the Netherlands. *Environ. Res. Lett.* 13. doi:10.1088/1748-9326/aad19e [download](#)
  - Van Baaren, E.S., Delsman, J.R., Karaoulis, M., Pauw, P.S., Vermaas, T., Bootsma, H., De Louw, P.G.B., Oude Essink, G.H.P., Dabekaussen, W., Gunnink, J.L., Dubelaar, W., Menkovic, A., Siemon, B., Steuer, A., Meyer, U., 2018. FRESHEM Zeeland - FRESH Salt groundwater distribution by Helicopter ElectroMagnetic survey in the Province of Zeeland, *Deltares report 1209220*. Utrecht, Netherlands. [download rapport](#)
  - Faneca Sánchez, M., Gunnink, J.L., van Baaren, E.S., Oude Essink, G.H.P., Siemon, B., Auken, E., Elderhorst, W., de Louw, P.G.B. 2012. Modelling climate change effects on a Dutch coastal groundwater system using airborne Electro Magnetic measurements, *Hydro. Earth Syst. Sci.*, 16, 4499-4516, doi: 10.5194/hess-16-4499-2012. [download](#)
- Some ppt sheets on Airborne Geophysics and fresh-salt groundwater: [download](#)
- **Presentation** (Dutch) Effecten van klimaatverandering op het kustnabije grondwatersysteem van Noord-Fryslân [download](#)
- [Animation: 3D fresh-saline distribution North-west Friesland](#)









Data scarcity often limits sustainable management of these groundwaters worldwide. Mapping and monitoring the current spatial extent of fresh groundwater resources normally requires detailed in-situ information of large areas, which is seldom available. As an alternative, remotely sensed data are a cheap way of collecting data and cover large areas in a short time span. In this research, Airborne Electromagnetic (AEM) geophysical methods are exploited. These AEM methods are especially suited for detecting the salinity of groundwater due to the impact of salinity on the conductivity for electrical currents used in EM (Fig. 1 and 2). Complicating factors include the effect of man-made infrastructure that transports electrical currents (powerlines, railways, etc.) and the effects of the underlying geological structure. Both salinity and lithology influence the response of the EM system and it is therefore important to be able to unravel the combined effect of these two factors.

Fig. 2: Helicopter borne geophysical systems: a. left: BGR system recording simultaneously frequency-domain electromagnetic, magnetic and radiometric data, b. right: SkyTEM system recording time domain electromagnetic data.

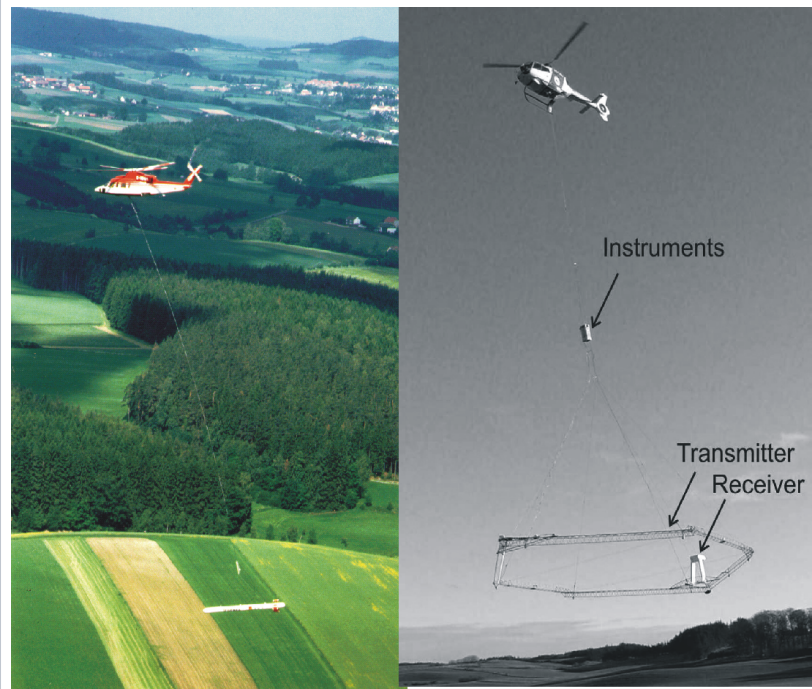

Deltares works together with institutes such as TNO, BGR, Aarhus Geophysics and Fugro to make these AEM methods suitable and accessible for stakeholders for mapping fresh groundwater resources over large areas. Pilot studies in The Netherlands, Denmark and Germany within the framework of the Interreg IV-B project CliWat have been set up to combine Airborne EM results with detailed 3D geological models to get a much better insight in the spatial distribution of saline groundwater as well as in the geological setting. Subsequently, 3D variable-density groundwater and coupled salt transport models use these salinity data to more accurately predict the possible effects of climate change, sea level rise and human activities on the availability of fresh groundwater resources (Fig. 3). Adaptive strategies will be more effective (and cheaper) to limit the impact of negative future stresses. We think that incorporating all these different (innovative) techniques will, in the end, lead to a more sustainable water management.

Fig. 3: It is very suspicious but here we think we have a perfect fit between different types of geophysical techniques (TEC, CVES, EM31), samples groundwater, Helicopter EM (conductivity at 4 m below sea level) and a 3D numerical model: the thickness of a thin fresh water lens largely varies over small distances.

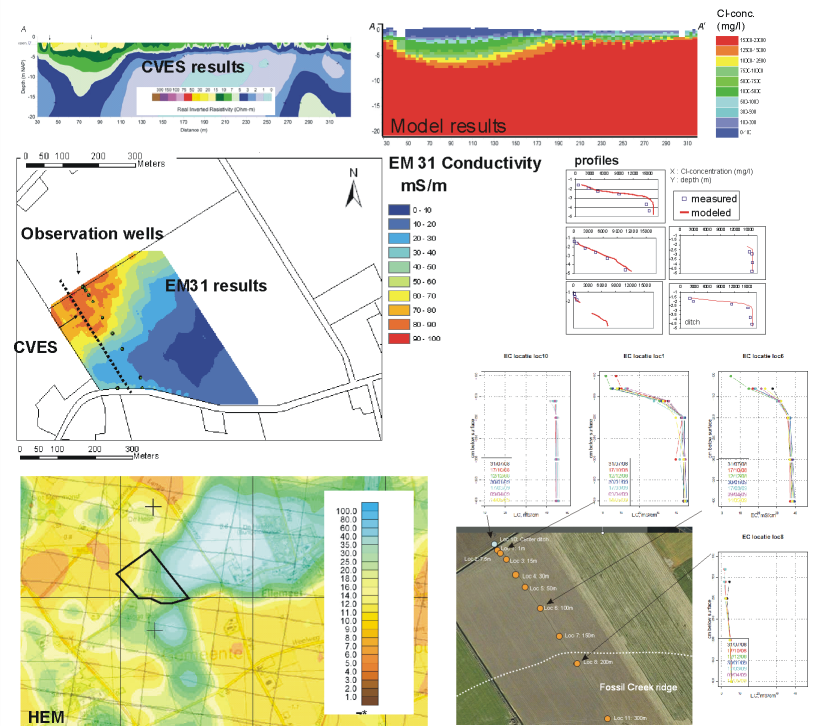

Information: gualbert.oudeessink@deltares.nl, perry.delouw@deltares.nl, geertjan.nijsten@deltares.nl