



ELSEVIER



CrossMark

Procedia Engineering

Volume 143, 2016, Pages 582–589

Advances in Transportation Geotechnics 3 . The 3rd
International Conference on Transportation Geotechnics
(ICTG 2016)



The 2016-update of the Dutch Design Guideline for Basal Reinforced Piled Embankments

Suzanne J.M. van Eekelen

Deltares, chairperson CUR226 Committee, Netherlands.

Suzanne.vaneekelen@deltares.nl

Abstract

The Dutch Design Guideline CUR226 for basal reinforced piled embankments was revised before publishing its second edition in Dutch and English in 2016. This paper reports about the main changes in comparison to its first edition, of 2010. One of the main changes was adopting the Concentric Arches method of Van Eekelen et al. (2012b, 2013, 2015) and van Eekelen (2015) for the design of the geosynthetic reinforcement (GR). An accompanying set of partial safety factors was derived with an extensive probabilistic study. The Eurocode guidelines for traffic load were adopted and converted into a uniformly distributed design load for piled embankments using the Boussinesq spreading method. This resulted in a practical set of tables. Finally, a design guideline for the pile caps on top of the piles was added. Extensive calculation examples support the use of the new guideline.

Keywords: Piled embankments, geosynthetic reinforcement, arching, Netherlands, pile caps, design guidelines

1 Introduction

The first piled embankment reinforced with geosynthetic reinforcement (GR) was constructed in 1972 in the in de Göta älv valley in Sweden (Holtz en Massarsch, 1976). The first British piled embankments were constructed in the early 1980s, one of them as the foundation of an abutment of the Second Severn Crossing (Russell and Pierpoint, 1997). The Monnickendam Bus Lane is the first Dutch piled embankment, dating back to 2000. Since those days many basal reinforced piled embankments have been constructed worldwide.

A basal reinforced piled embankment (Figure 1) consists of a reinforced embankment on a pile foundation. The reinforcement consists of one or more horizontal layers of geosynthetic reinforcement (GR) installed at the base of the embankment. The embankment is filled with for example crushed demolition waste aggregate or sand.

A basal reinforced piled embankment can be used for the construction of roads or railways when a traditional construction method would require too much construction time, affect vulnerable objects nearby or give too much residual settlement, making frequent maintenance necessary. Some piled embankments are long, like the Dutch 14 km long regional road N210 between Krimpen and Bergambacht, or the Dutch 3.5 km long bypass road near Reeuwijk (Van Eekelen and Venmans, 2016). Other piled embankments are short and for example constructed for transition zones between traditional embankments on soft soils and a founded structure or as an abutments for a viaduct.

The first edition of the Dutch design guideline for basal reinforced piled embankments CUR226 was published in 2010 (Figure 4, described in Van Eekelen et al., 2010b) and adopted major parts from the German EBGEO (2010). Since those days, the knowledge about basal reinforced piled embankments has developed largely; a more reliable design method for the GR became available (Van Eekelen et al., 2015 and Van Eekelen, 2015), an adaptation to the Eurocode was needed and questions about pile cap design arose, making an update of CUR226 necessary. This paper describes the highlights of the 2016-update of CUR226.

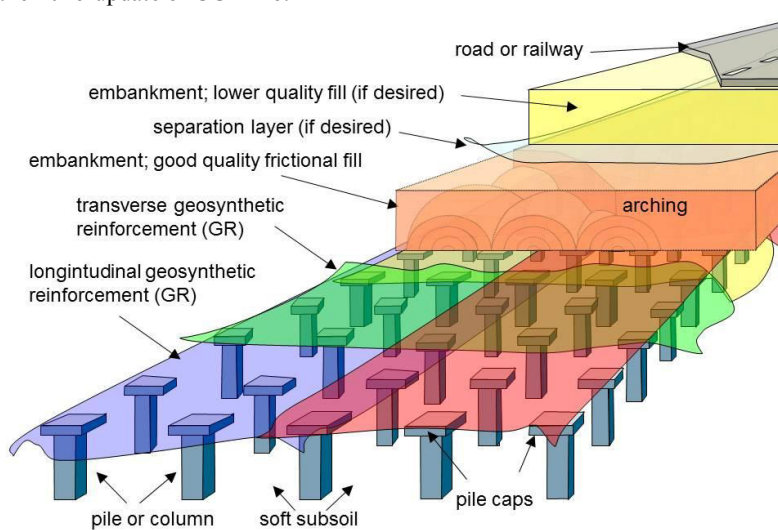


Figure 1: A basal reinforced piled embankment.

2 GR Design

The GR strain needs to be calculated to design the GR. Multiplying this GR strain by the GR stiffness gives the tensile force, which needs to be smaller than the long-term GR tensile strength. Most calculation models calculate the GR strain in two steps (Figure 2a and b). Step 1 divides the vertical load into two load parts. One part (load part *A*) is transferred to the piles directly. This part is relatively large because a load tends to be transferred to the stiffer parts of a construction. This mechanism is known as ‘arching’. The second, residual load part (*B+C*) rests on the GR (*B*) and the underlying subsoil (*C*), see Figure 2c.

Calculation step 2 determines the GR strain. Only the GR strips between each pair of adjacent piles are considered: they are loaded by *B+C* and may or may not be supported by the subsoil. The GR strain can be calculated if the distribution of load part *B+C* on the GR strip, the amount of subsoil support and the GR stiffness are known.

CUR226 (2010) used the calculation model of Zaeske (2001) for GR design. The German EBGEO had already adopted that model before. The Dutch made the same choice for Zaeske’s model because it matched some field measurements reasonably well. However, many more measurements became available since 2010. Van Eekelen et al. (2015) showed that Zaeske’s model gives on average 2.5 times the strain measured in seven field cases and four laboratory series of experiments (Figure 3a).

CUR226 (2016) uses the Concentric Arches model of Van Eekelen (2015) and Van Eekelen et al. (2013, 2015). This model was developed on the basis of a series of laboratory tests (Van Eekelen et al., 2012a and 2012b). Calculation step 1 consists of a set of 3D and 2D concentric arches as shown in Figure 2a. The load is transported along the concentric arches. Smaller arches exert less load on their subsurface, large arches exert more load on their subsurface. The result is that a relatively large load is exerted on the pile caps (*A*) and the GR strips between adjacent piles, which matches measurements quite well. Figure 2b shows the load distribution on the GR strips between adjacent piles for step 2 as adopted in CUR226 (2016); when there is no subsoil support, or almost no subsoil support, the inverse

triangular load distribution is used. When there is significant subsoil support, a uniform load distribution is used.

Figure 3b shows that the GR strain calculated with the new model is on average 1.1 times the measured GR strain with a lower coefficient of determination, R^2 , than shown in Figure 3a. The calculated GR strain is therefore almost a perfect match with the measured GR strain. CUR226 (2016) has therefore adopted the Concentric Arches model.

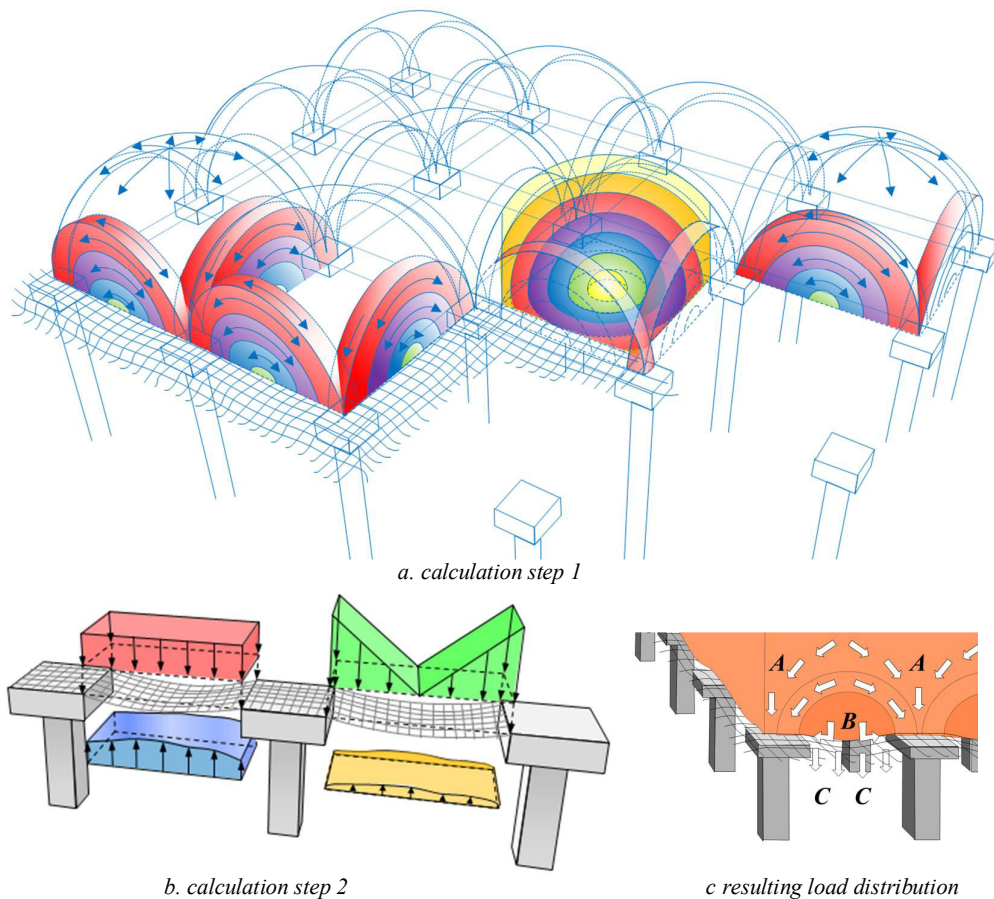


Figure 2: The new Concentric Arches model (Van Eekelen, 2015 and Van Eekelen et al., 2012b, 2013, 2015) consists of two steps: (a) step 1 calculates the load distribution in *A* and *B+C* and (b) step 2 calculates the GR strain that occurs in the GR strip between adjacent pile caps (c) resulting load distribution (*A*, *B*, *C*).

3 Model Factor, Load and Material Partial Factors

One can debate whether a design guideline should adopt a model that nearly always gives a design on the safe side, as with the Zaeske model (Figure 3a), or whether a design guideline should adopt a model that describes reality as well as possible (Figure 3b) and consider safety separately. The Dutch CUR226 committee decided to adopt the new Concentric Arches model and to combine this with the inclusion of a model factor to cope with the uncertainty in the model. The value of the model factor was determined using the data points given in (Figure 3b).

Van Duijnen et al. (2015) reported the safety analysis used to determine the model factor and the associated load- and material factors. Following the suggestions made in EC1990 (2011, Eurocode 0), they conducted a statistical assessment of the differences between the measured and calculated GR strains and then carried out Monte Carlo (MC) simulations for the SLS situation, for several reference

cases in order to obtain the model factor. Multiplying this model factor by the GR strain calculated with characteristic values gives a value that is higher than the real GR strain in 95% of the cases. In other words, if the model factor is used, reality is worse than the calculation in 5% of the cases.

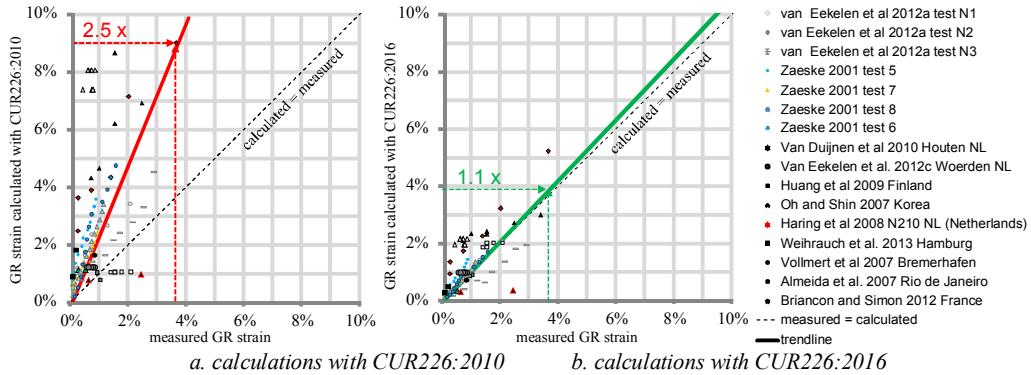


Figure 3: Comparison calculations and measurements in seven field projects and four series of experiments. Van Eekelen et al., 2015 gives the sources of the references given in this picture, which are not given in the references of this paper due to space limitations. Calculations without safety factors.

Factor	SLS		Reliability class ULS		
	$\beta \geq 2.8$		RC1 $\beta \geq 3.5$	RC2 $\beta \geq 4.0$	RC3 $\beta \geq 4.6$
Model factor	γ_M	1.40	1.40	1.40	1.40
Traffic load p	$\gamma_{f;p}$	1.00	1.05	1.10	1.20
Tangent of internal friction, $\tan \phi$	$\gamma_{m;\phi}$	1.00	1.05	1.10	1.15
Unit weight fill, γ	$\gamma_{m;\gamma}$	1.00	0.95	0.90	0.85
Subgrade reaction of subsoil, k_s	$\gamma_{m;k}$	1.00	1.30	1.30	1.30
Axial GR stiffness, J	$\gamma_{m;EA}$	1.00	1.00	1.00	1.00
GR Strength, T_r	$\gamma_{m;T}$	1.00	1.30	1.35	1.45

Table 1: Model factor and partial safety factors used for the design of the GR design in CUR226 (2016).

The calculated strain should be multiplied with the model factor γ_M , γ_f is a load factor, $F_d = \gamma_f \cdot F_k$, γ_m is a material factor, $X_d = X_k / \gamma_m$, a unit weight increase is not beneficial, hence the value of $\gamma_{m;\gamma}$ is less than 1.0.

Subsequently, Van Duijnen et al. (2015) determined three sets of partial material and load factors associated with the model factor for a level 1 design approach (the method with partial factors). They showed that using these factor sets satisfy the reliability indices β required for the three reliability classes of EC1990 (2011, Eurocode 0). The resulting model and partial factors were adopted in CUR226 (2016) and are shown in Table 1.

Extensive calculation examples of GR design were included in the 2016-update of CUR226.

4 Limitations

CUR226 (2016) was written for piled embankments with a basal geosynthetic reinforcement. The validation of the GR design rules was conducted with measurements in piled embankments with:

- a centre-to-centre (ctc)-pile spacing < 2.50 m;
- geogrids, in some cases combined with woven geotextiles (geogrid on top of geotextile);
- a groundwater level below or only just above the pile caps;
- $0.5 < H/(s_d - d_{eq}) < 4.0$; with H (m) the height of the embankment, s_d (m) the diagonal ctc-pile spacing and d_{eq} (m) is the diameter or equivalent diameter of the pile cap;

- vertical stresses on top of the GR above the pile caps up to 1450 kPa. In practice, however, some embankments of this type have already been realised with vertical stresses on the pile cap of 2000 kPa.

Furthermore, CUR226 (2016) gives the following limitations for its applicability:

- $H/(s_d-d_{eq}) \geq 0.66$ with H , s_d and d_{eq} explained above ;
- $P_{traffic} < p_{embankment\ weight}$ or apply κ -model of Heitz (2006, section 6), see section 5 for $P_{traffic}$;
- $b_{eq}/s_{x,y} \geq 0.15$ with b_{eq} the width of a square pile cap or the equivalent width of a circular one;
- one GR layer: $z \leq 0.15$ m, two GR layers: distance between two layers ≤ 0.20 m with z (m) is the distance between GR and pile cap;
- $2/3 \leq s_x/s_y \leq 3/2$;
- $\varphi'_{fill,cv} \geq 35^\circ$ for the lowest layer with height $h^* = 0,66(s_d-d_{eq})$. Above that, $\varphi'_{fill,cv} \geq 30^\circ$;
- $T_{r,d} \geq 30$ kPa, in both directions, and $0.1 \leq T_{r,x;d}/T_{r,y;d} \leq 10$ where $T_{r,d}$ (kN/m) is the short term GR tensile strength ;
- $k_{s,paal}/k_{s,subsoil} > 10$, with k the subgrade reaction.

5 Traffic Load

The traffic loads given in load model BM 1 of EC1991-2 were included in the CUR226 (2016). These loads were converted into a uniformly distributed load, resulting in tables with values that were determined as follows:

- the axle loads were spread according Boussinesq over the total height of the embankment;
- the influence of all wheel loads were summed;
- determination of the average stress $p_{traffic}$ on the maximum loaded pile grid ($s_x \cdot s_y$), with $s_{x,y}$ (m) the ctc-pile spacing.

Table 2 presents a summary of a larger CUR226 (2016) table, which gives more tables for smaller values for N and for the situation with only one driving lane. When using these tables, the extra spreading capacity of the asphalt top layer may be taken into account with a virtual extra height.

Height embankment H [m]	Pile spacing			
	$1.0 \cdot 1.0$ m ²	$1.5 \cdot 1.5$ m ²	$2.0 \cdot 2.0$ m ²	$2.5 \cdot 2.5$ m ²
1.0	74.99	70.66	62.11	52.78
2.0	44.04	41.94	39.43	36.77
3.0	28.80	28.01	27.04	25.94

Table 2: Maximum average uniformly distributed traffic load $p_{traffic}$, based on NEN-EN 1991-2 for number of passages per year: $N = 2.000.000$, 2 driving lanes, with driving lane 1 heavy traffic: 4 wheels $F_{wheel} = 120$ kN and $q_{uniform} = 7.2$ kPa and the second driving lane: 4 wheels with $F_{wheel} = 100$ kN and $q_{uniform} = 2.5$ kPa.

6 Heavy Traffic, Thin Embankment

Heavy truck passages influence the arching in the embankment, specifically in a shallow embankment. Van Eekelen et al. (2010a) showed that the arching is reduced as a result of a heavy passage. This results in a temporarily increase of the vertical load on the GR. They also showed that arching recovered during a rest period after a number of passages. Heitz (2006) conducted experiments with high dynamic loading on a test set-up with four small square piles underneath a sand embankment with and without a geosynthetic basal reinforcement. He found that (1) the arching reduces due to dynamic loading; (2) the arching recovers during a rest period and (3) cyclic loading has significantly less influence on the arching in (a) a relatively thick embankment or (b) an embankment with GR in comparison to one without GR.

On the basis of his unreinforced experiments, Heitz (2006) determined an empirical model to reduce arching, the so-called κ (kappa)-model. This κ -model is at the safe side as Heitz based his model on his unreinforced experiments, which are the tests with the heaviest influence on the arching.

The Heitz- κ model had already been included in CUR226 (2010). However, the graphs determining the κ -values were modified and brought in line with the original ideas of Heitz.

7 Pile Design

CUR226 (2010) assumed that an embankment is not able to re-distribute the load in the case of pile failure (a non-stiff construction). In CUR226 (2016), this rule has been extended. If the embankment has enough height: $H/(2 \cdot s_d - d_{eq}) \geq 0.66$, the construction may be considered as stiff and the embankment is assumed to be able to re-distribution the load in the case of pile failure. In this equation is H (m) the height of the embankment, s_d (m) the diagonal ctc-pile spacing and d_{eq} (m) the diameter of circular pile caps or the equivalent diameter of square pile caps.

When the reinforced embankment is non-stiff, which will often be the case for shallow embankments where the pile spacing is maximised, the design should be done using the factors appropriate for a non-stiff structure, unless it has been demonstrated that the structure will continue to perform if one pile fails.

The other calculation rules for the geotechnical bearing capacity of the piles follow the normal local design guidelines (NEN 9997-1 in the Netherlands). Pile moments and cross forces must be calculated with a numerical program using for example finite element analysis, which is further explained in Section 9.

8 Pile Cap Design

Pile caps are circular or square and preferably have rounded edges to prevent GR damage. If pile caps have sharp edges, protection measures are recommended to protect the GR against damage. A square pile cap size frequently applied in the Netherlands is 0.75m x 0.75m x 0.30m; which is small and thick in comparison to ‘normal’ concrete structures, this height is usually enough to span several meters. CUR225 (2016) specifies the loads on the pile caps as follows (Figure 5):

- vertical load (A) due to arching (Figure 2c), uniformly distributed on the pile cap (kPa);
- tensile force T from the geosynthetic reinforcement (kN/m);
- axial pile force from underneath, which is assumed to be uniformly distributed (kPa).

The pile cap should be checked on punching and bending. Usually, the thickness of the pile cap is enough to prevent punching. The strength of the steel reinforcement in the pile cap needs to be enough in the ULS and the sustainability, or the crack width, should be enough in the SLS. The English version of CUR226 (2016) gives a summary of the more lengthy Dutch pile caps chapter.

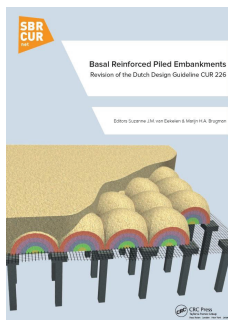


Figure 4: The 2016 update of CUR226

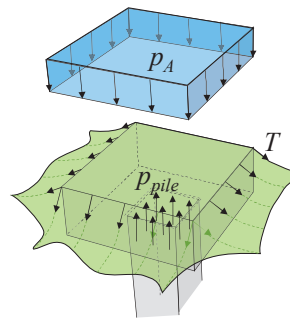


Figure 5: Loads on a pile cap: arching p_A (kPa), the tensile force T (kN/m) and the axial pile force p_{pile} , uniformly distributed (kPa).

9 Numerical Calculations

The GR design should be carried out analytically with the Concentric Arches model. CUR226 (2016) does not allow numerical GR design. However, numerical calculations are usually necessary to determine deformations, pile moments and cross forces. With numerical calculations, the influence is determined:

- on adjacent objects;
- of adjacent existing and future objects;
- of lateral loads such as traffic, spreading forces in the embankment.

In daily practice, 2D calculations are generally used, both in longitudinal and transverse direction. The 3D appearance of piled embankments makes it necessary to consider carefully the pile stiffness, the soil behaviour between piles, pile settlement behaviour and vector summing of pile moments and cross forces.

All relevant construction stages and secondary effects need to be included. A 'gap' needs to be applied between subsoil and GR in the cases that the subsoil support will disappear during service life.

For each cross section, two numerical calculations are needed. The first is conducted with calculation values, although it is an option to use calculation values in the normative phase only, and characteristic values in the other phases. The second calculation must be conducted with characteristic values. The results of the second calculation should be multiplied with 1.2 and should then be compared with the results of the first calculation. The highest values are the normative pile moments and cross forces.

10 Conclusions

This paper presents the 2016-update of the Dutch design guideline for basal reinforced piled embankments. This guideline has been developed in full compliance with the Eurocodes, including Eurocode 7 (NEN-EN 1997-1) with its national appendices. The guideline has been published both in Dutch and English.

Acknowledgements

Financial or in kind contributions were received for the research program and/or the making of the CUR guideline from: Arthe Civil & Structure, Ballast Nedam, Bonar, BRBS Recycling, Citeko / Naue / BBGeo, Crux Engineering, Deltares, Fugro GeoServices, Grontmij, Huesker / Geotec Solutions, Movares, the Dutch Chapter of IGS (NGO), The Dutch Ministry of Public Works dept. for Road Construction, RPS Advies- en ingenieursbureau, Stichting Fonds Collectieve Kennis - Civiele Techniek (FCK-CT), TenCate, Tensar, Strukton, Voorbij Funderingstechniek.

References

CUR 226. (2010). *Ontwerprichtlijn paalmatrassystemen (Design Guideline Piled Embankments)*. Stichting CUR, Gouda, ISBN 978-90-376-0518-1 (in Dutch).

CUR 226. (2016). Eds. S.J.M. van Eekelen and M.H.A. Brugman. *Design Guideline Basal Reinforced Piled Embankments. Revision of the Design Guideline CUR226*. (In English). SBRCURnet & CRC press, Delft, in press, ISBN 9789053676240. <https://www.crcpress.com/Design-Guideline-Basal-Reinforced-Piled-Embankments/Eekelen-Brugman/9789053676240>.

EBGEO (2010) Empfehlungen für den Entwurf und die Berechnung von Erdkörpern mit Bewehrungen aus Geokunststoffen, Deutsche Gesellschaft für Geotechnik e.V. (DGGT).

EC 1990: NEN-EN 1990+A1+A1/C2:2011 Eurocode 0: *Basis of Structural Design, including the National Annex 2011*.

EC 1991: NEN-EN 1991-2+C1:2011 Eurocode 1: *Actions on structures - Part 2: Traffic loads on bridges, including the National Annex 2011.*

EC 1997: NEN-EN 1997-1+C2:2012 Eurocode 7: *Geotechnical Design- Part 1: General rules, including the National Annex 2012.*

Heitz, C. (2006). *Bodengewölbe unter ruhender und nichtruhender Belastung bei Berücksichtigung von Bewehrungseinlagen aus Geogittern.* Schriftenreihe Geotechn., Kassel, Heft 19.

Holtz, R.D., Massarsch, K.R. (1976). *Improvement of the stability of an embankment by piling and reinforced earth.* In: Proc. 6th ECSMFE, Vienna, Austria, Vol. 1.2, pp. 473-478.

NEN 9997-1. (2005/2009). *Geotechnisch ontwerp van constructies – Composition of NEN-EN 1997-1, NEN-EN 1997-1/NB en NEN 9097-1 Aanvullingsnorm bij NEN-EN 1997-1.*

Russel, D. Pierpoint, N. (1997). *An assessment of design methods for piled embankments.* Ground Engineering November 1997, 39 – 44.

Van Duijnen, P.G., Schweckendiek, T., Calle, E.O.F., van Eekelen, S.J.M. (2015). *Calibration of partial factors for basal reinforced piled embankments.* In: Proc. of ISGSR2015 Risks, Rotterdam.

Van Eekelen, S.J.M., Bezuijen, A., Alexiew, D. (2010a). *The Kyoto Road Piled Embankment: 3^{1/2} Years of Measurements.* In: Proc. of 9ICG, Brazil, 1941-1944.

Van Eekelen, S.J.M., Jansen, H.L., van Duijnen, P.G., De Kant, M., van Dalen, J.H., Brugman, M.H.A., van der Stoel, A.E.C., Peters, M.G.J.M. (2010b). *The Dutch design guideline for piled embankments.* In: Proc. of 9 ICG, Brazil, 1911-1916.

Van Eekelen, S.J.M., Bezuijen, A., Lodder, H.J., van Tol, A.F. (2012a). *Model experiments on piled embankments Part I. Geotextiles and Geomembranes* 32: 69 - 81.

Van Eekelen, S.J.M., Bezuijen, A., Lodder, H.J., van Tol, A.F. (2012b). *Model experiments on piled embankments. Part II. Geotextiles and Geomembranes* 32: 82 – 94.

Van Eekelen, S.J.M., Bezuijen, A., Van Tol, A.F. (2013). *An analytical model for arching in piled embankments. Geotextiles and Geomembranes* 39: 78 – 102.

Van Eekelen, S.J.M. (2015). *Basal Reinforced Piled Embankments.* PhD thesis Technical University of Delft, Netherlands. ISBN 978-94-6203-825-7 (print), ISBN 978-94-6203-826-4 (electronic version). Downloadable at: www.paalmatrassen.nl of www.piledembankments.com, including an excel file with the calculation model.

Van Eekelen, S.J.M., Bezuijen, A. van Tol, A.F. (2015). *Validation of analytical models for the design of basal reinforced piled embankments.* Geotextiles and Geomembranes. 43:1, 56 - 81.

Van Eekelen, S.J.M. and Venmans, A.A.M. (2016). *Piled embankment or a traditional sand construction: how to decide? A case study.* In: Proc. of ICCS18, Portugal.

Zaeske, D. (2001). *Zur Wirkungsweise von unbewehrten und bewehrten mineralischen Tragschichten über pfahlartigen Gründungselementen.* Schriftenreihe Geotechnik, Uni Kassel, Heft 10. ISBN 3-89792-048-4.

Members of the CUR Committee

Authors of CUR226-2016: dr. Suzanne J.M. van Eekelen (Deltares; chairperson; Concentric Arches model for GR design and calculation examples), Marijn H.A. Brugman, (Arthe Civil & Structure; editor), Piet G. van Duijnen (Geotec Solutions, previously of Huesker; safety philosophy and model factor and partial factors); Jacques Geel (Heijmans, pile caps); Martin de Kant (Royal HaskoningDHV; fill properties); Maarten ter Linde, (Strukton), Eelco Oskam, (Movares); Marco G.J.M. Peters, (Grontmij; traffic load); Maarten Profitlich, (Fugro GeoServices; calculation examples), Daan Vink / Bas Snijders, (Crux Engineering: numerical, transition zones, stiff-not-stiff embankment); Dipl.-Ing Lars Vollmert (Naue / BBGeo: adaption κ model).

Feed-back group: Joris van den Berg, (Bonar); Henkjan Beukema, (Dutch Ministry of Public Works dept. for Road Construction); Jeroen W. Dijkstra, (Cofra); C.A.J.M. Brok (Huesker); Dick W. Eerland (Eerland Bouwstoffen Management); Diederick Bouwmeester, (Ballast Nedam); Jos Jansen, (Volker InfraDesign); Leo Kuljanski (Tensar); Herman-Jaap Lodder, (RPS Advies- en ingenieursbureau; review equations); Gert Koldenhof (Citeko); Sander Nagtegaal (Voorbij Funderingstechniek); Tara C. Van der Peet, (Witteveen + Bos: review entire guideline); Jeroen Ruiter, (TenCate Geosynthetics); Robbert Drieman, (Fugro).