

## NEED

### The Northern European Enclosure Dam for if Climate Change Mitigation Fails

Sjoerd Groeskamp and Joakim Kjellsson

**ABSTRACT:** It might be impossible to truly fathom the magnitude of the threat that global-mean sea level rise poses. However, conceptualizing the scale of the solutions required to protect ourselves against global-mean sea level rise aids in our ability to acknowledge and understand that threat. On these grounds, we here discuss a means to protect over 25 million people and important economical regions in northern Europe against sea level rise. We propose the construction of a Northern European Enclosure Dam (NEED) that stretches between France, the United Kingdom, and Norway. NEED may seem an overwhelming and unrealistic solution at first. However, our preliminary study suggests that NEED is potentially favorable financially, but also in scale, impacts, and challenges compared to that of alternative solutions, such as (managed) migrations and that of country-by-country protection efforts. The mere realization that a solution as considerable as NEED might be a viable and cost-effective protection measure is illustrative of the extraordinary global threat of global-mean sea level rise that we are facing. As such, the concept of constructing NEED showcases the extent of protection efforts that are required if mitigation efforts fail to limit sea level rise.

Downloaded from <http://journals.ametsoc.org/bams/article-pdf/101/7/E1174/4987395/bamsd190145.pdf> by guest on 05 August 2020

<https://doi.org/10.1175/BAMS-D-19-0145.1>

Corresponding author: Sjoerd Groeskamp, [sjoerd.groeskamp@nioz.nl](mailto:sjoerd.groeskamp@nioz.nl)

In final form 7 February 2020

©2020 American Meteorological Society

For information regarding reuse of this content and general copyright information, consult the [AMS Copyright Policy](#).



This article is licensed under a [Creative Commons Attribution 4.0 license](#).

**AFFILIATIONS:** **Groeskamp**—Department of Ocean Systems, Royal Netherlands Institute for Sea Research (NIOZ), and Utrecht University, Texel, Netherlands; **Kjellsson**—GEOMAR Helmholtz Centre for Ocean Research Kiel, and Christian-Albrechts-Universität, Kiel, Germany

Current global-mean temperature is about 1°C above preindustrial levels (Haustein et al. 2017), while implemented policies imply a further global warming up to 2.6°–3.1°C by 2100 (Rogelj et al. 2016) or 2.0°–4.9°C overall (Raftery et al. 2017). Global-mean sea level rise (SLR) lags behind global-mean temperature rise, but is accelerating and has risen over 21 cm since 1880 (Church and White 2011). It is virtually certain that global-mean SLR will continue beyond 2100 (Church et al. 2013). A baseline of 2.3-m global-mean SLR per 1°C is predicted (Levermann et al. 2013), suggesting an unavoidable 5–11-m rise over the next centuries to millennia. High-end scenarios predict over 10-m global-mean SLR by 2500 (DeConto and Pollard 2016; Edwards et al. 2019), with a possible 1–2 m by 2100 (Jevrejeva et al. 2014; Kopp et al. 2014; Bars et al. 2017). In short, global-mean SLR may pose an unprecedented threat to society as we know it.

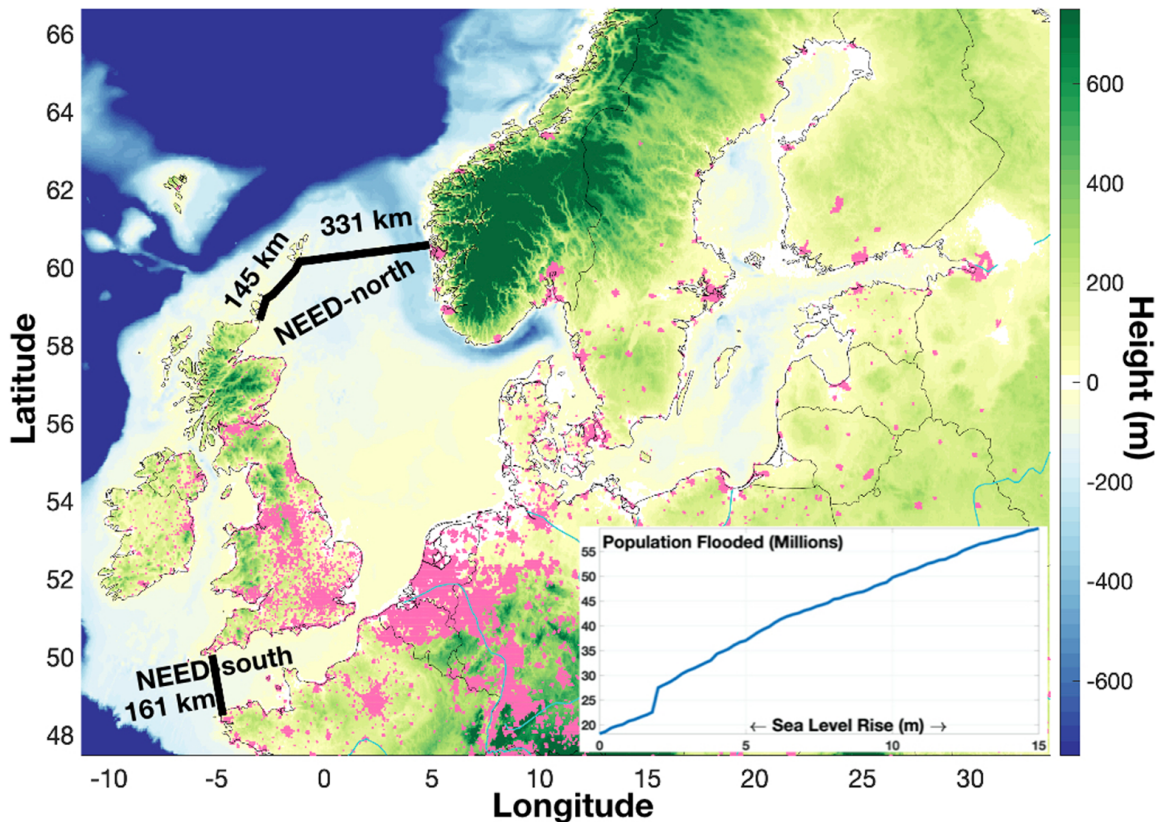


Fig. 1. The proposed location of the Northern European Enclosure Dam (NEED; thick black lines) superimposed on the topography (Smith and Sandwell 1997), combined with areas where the population density exceeds 200 persons per square kilometer in the year 2020 (pink dots; CIESIN 2017). We use the combination of these data to provide the number of people within the enclosure that will be submerged for a certain amount of sea level rise (see inset). NEED-south runs from France (Ploudalmézeau, ~25 km north from Brest) to England (the Lizard Heritage Coast, ~100 km west from Plymouth), measures 161 km in length, and has an average ocean depth of about 85 m and a maximum depth of 102 m. NEED-north runs from northern Scotland (John o' Groats, ~200 km north of Aberdeen) via the Orkney Islands to the Isle of Noss (part of the Shetlands Islands) from where it crosses the North Sea to Bergen in Norway. Making use of the islands, the part from Scotland to the Isle of Noss is only 145 km in length and averages 49 m in depth. The crossing from the Isle of Noss to Norway measures 331 km in length and has an average depth of 161 m, with a maximum depth of 321 m in the Norwegian Trench. The construction of NEED would protect coastal communities of 15 countries, namely, Belgium, Denmark, England, Estonia, Finland, France, Germany, Latvia, Lithuania, Poland, Netherlands, Norway, Russia, Scotland, and Sweden. This includes the capital cities of Amsterdam, Copenhagen, Edinburgh, Helsinki, London, Oslo, Riga, Stockholm, and Tallin and major cities such as Bremen, Hamburg, Rotterdam, St. Petersburg, and The Hague.

The magnitude of the threat that SLR may pose demands a response with a solution that reflects the scale of the problem. On these grounds, we propose the construction of the Northern European Enclosure Dam (NEED) that disconnects the North and Baltic Seas from the Atlantic Ocean, to protect 15 northern European countries from global-mean SLR. This can be achieved by constructing two enclosure dams (Fig. 1). The southern part of NEED connects France (near Brest) to the southwest coast of England and measures 161 km in length with an average depth of about 85 m and a maximum depth of 102 m. The northern part of NEED extends from the northeast tip of Scotland, via the Orkney and Shetland Islands to Bergen in Norway. The northern part has a total length of 476 km and average depth of 127 m with a maximum of 321 m in the Norwegian Trench. The two components together are referred to as NEED and have a total length of 637 km. The construction of NEED would protect coastal communities that under current population density consist of about 25 million people below 2-m SLR while 55 million live below 15-m SLR (inset Fig. 1). If constructed, NEED would be one of the largest civil-engineering challenges ever faced. Alternative configurations of NEED are considered less effective (appendix A).

NEED may seem an overwhelming and unrealistic solution at first. Regardless, we here present preliminary quantification and thoughts on the financial feasibility, social–political considerations, environmental impacts, and technological challenges of NEED compared to that of alternative solutions, such as (managed) migrations and that of country-by-country protection efforts. In doing so, we arrive at an alarming conclusion: a solution as considerable as NEED might be a viable and cost-effective protection measure for even a few meters of SLR. For northern Europe, NEED may therefore be preferred over the alternative solutions. This conclusion reflects the magnitude of the threat that society is facing as a result of global-mean SLR. We here do not and cannot conclusively determine if NEED could and should be constructed. Yet, we do emphasize that the conclusions of our preliminary findings advocate for immediate action to intensify and further climate mitigation efforts, so that solutions with a scale and impact such as NEED are not going to be required.

### Alternative solutions

To place NEED in context of alternative solutions, we compare with other strategies to cope with (local) SLR. These can be categorized into 1) no action, 2) protection, or 3) managed retreat. Based on monetary value alone, the cost of no action exceeds that of protection and managed retreat by a factor of 5–10 (Aerts et al. 2008; Kabat et al. 2009; Diaz 2016; Hinkel et al. 2014, 2018). Due to the additional nonmonetary losses and associated possible social–political instabilities of no action (Adger et al. 2009), we only consider protection and managed retreat as practical solutions.

Managed retreat could potentially be less expensive than protection in certain locations (Diaz 2016) and may theoretically be a good solution when implemented over long periods of time, well before a potential disaster occurs (Nicholls and Klein 2005; Dronkers et al. 1990a). In the case of SLR this requires immediate implementation. However, managed retreat leads to intangible costs such as large social and psychological difficulties in displacing people from their homes as well as cultural heritage loss. Related migration can lead to national and international social–political instability, forcing decision-makers to shy away from spurring processes to facilitate managed retreat (Hino et al. 2017). Consequently, managed retreat is currently not widely implemented and arguably not a viable solution to timely address the threat of SLR.

If we accept the reasoning provided above, we are left with protection as the most realistic solution. With economic and population growth in coastal areas, protection also becomes increasingly more worthwhile, while encouraging a proactive rather than reactive attitude to the threat of global-mean SLR (Nicholls 2011). Current protection measures are implemented on

a country-by-country (national) basis. Instead, NEED could offer a concerted effort to address protection of coastal zones across Europe against SLR (Tol et al. 2008).

From the forgoing discussion we conclude that to understand how NEED compares to other solutions, we only have to compare NEED against national-based protection, as that seems to be the most viable ongoing measure. In what follows we will therefore provide a preliminary discussion on the technical challenges; financial feasibility; and environmental,

social, and political impacts of NEED, with respect to that of national-based protection. To our surprise, NEED can sometimes be conceived as a better solution than continuing future upgrades of ongoing efforts. That a solution as radical as NEED has the potential to be preferred over ongoing protection measures is a direct reflection of the magnitude of the threat that SLR poses.

### Technical considerations for constructing NEED

There is substantial expertise available with regard to engineering of dikes, enclosure dams, and land reclamation projects. The largest constructed enclosure dams to date are the Afsluitdijk (Netherlands) and the Saemangeum Seawall (South Korea, Fig. 2). The Afsluitdijk<sup>1</sup> is 32 km long, about 11 m in height, and 90 m wide. The Saemangeum Seawall<sup>2</sup> is 33 km long, 36 m in height on average (maximum of 54 m), and 290 m wide. These dimensions are not far off those required for the construction of NEED-south and NEED-north near the Orkney and Shetland Islands. However, we expect a substantial but surmountable technological challenge for the part of NEED-north that crosses the Norwegian Trench with depths over 300 m. Fixed oil rigs are feasible in depths over 500 m, while moored oil rigs operate in waters with depths over 2000 m, indicating that having fixed constructions over 300-m depths is possible. Although dams have different requirements than oil rigs, this is encouraging for the possibility of constructing NEED.

**River discharge.** Enclosing the North and Baltic Seas will yield a net freshwater discharge of 40,000 m<sup>3</sup> s<sup>-1</sup> into the basin (appendix B). The discharge would lead to a SLR of 0.9 m yr<sup>-1</sup> within the enclosure and must therefore be pumped out into the Atlantic Ocean (appendix B). Recently, a pumping station with a capacity of 550 m<sup>3</sup> s<sup>-1</sup> was taken in operation in New Orleans (USACE 2015), while the Dutch Afsluitdijk will install two new pumping stations with a capacity of 400 m<sup>3</sup> s<sup>-1</sup> each.<sup>3</sup> As such, the discharge can be accounted for with less than 100 of such pumping stations, while we may expect more efficient and higher-capacity pumps likely to become available in the future. The discharge will also lead to freshening of the basin and reduce the salinity by a factor of 10 in about 100 years (appendix B). The freshening is expected to affect ecosystems, biodiversity, and the fishing industry (discussed later).



Fig. 2. Aerial views of (left) the Saemangeum Seawall in South Korea (source: <https://structurae.net/en/photos/252428-saemangeum-seawall>) and (right) the Afsluitdijk in the Netherlands (source: <https://beeldbank.rws.nl>), which are both over 30 km long.

<sup>1</sup> [https://deafsluitdijk.nl/wp-content/uploads/2014/06/Startdocument-planuitwerking-Afsluitdijk\\_tcm174-355254.pdf](https://deafsluitdijk.nl/wp-content/uploads/2014/06/Startdocument-planuitwerking-Afsluitdijk_tcm174-355254.pdf)

<sup>2</sup> [www.korea.net/NewsFocus/policies/view?articleId=89560](http://www.korea.net/NewsFocus/policies/view?articleId=89560)

<sup>3</sup> [www.deafsluitdijk.nl/wp-content/uploads/2014/05/DNA-druk-30april.pdf](http://www.deafsluitdijk.nl/wp-content/uploads/2014/05/DNA-druk-30april.pdf)

**Effects on the maritime industry.** The construction of NEED would significantly impact the maritime industry. The busiest trading ports in Europe (Rotterdam, Antwerp, Hamburg, Bremerhaven) lie within the enclosure. Without a proper solution to reduce the impact of NEED on the maritime industry, NEED would be a less viable solution for protection against SLR. Solutions are available, as NEED could for example incorporate sluice gates to allow for a continuation of ongoing shipping traffic. Sluice gates allowing for some of the largest ships in the world are already operational in the Netherlands and Belgium. Alternatively, harbors could be built on the ocean side of NEED from where goods could be transferred to trains or to vessels operating within the enclosure.

Regardless, the effect of NEED on the maritime industry will remain uncertain, both economically and technically. However, it is certain that without the construction of NEED, the maritime industry will also be economically affected and technically challenged as SLR will force ports to relocate or to adopt and continuously upgrade their protection measures.

**Remaining technical challenges.** Assuming a dam with a middle width of 50 m, two sloping sides with a 1:2 (height:width) ratio (Jonkman et al. 2013), and adding 20 m to the ocean depth to take into account future global-mean SLR, the volume of NEED-south and NEED-north are 4.6 and 31.6 km<sup>3</sup>, respectively. With most dams made out of a sand- or clay-like material, building NEED would require about 51 billion tons of sand (using a density for sand of 1400 kg m<sup>-3</sup>), which is equal to about one year's worth of global sand use (Peduzzi 2014). With sand becoming an increasingly scarcer material (Torres et al. 2017), the availability, sourcing, and transport of building material and related energy cost to build and maintain the enclosure could pose limitations on the ability to construct NEED. However, we argue that constructing new coastal defenses and maintaining, upgrading, and expanding the thousands of kilometers of coastal defense that are already in place to protect northern European coastal communities will also provide complex technological challenges that may not be easy to overcome. As such, these challenges could well exceed those that arise when constructing NEED, showcasing that no solution will be straightforward when dealing problems as complex as SLR. As such, solutions of the extent as NEED are to be considered in shaping our future protections measures against global SLR.

### Financial feasibility of NEED

We here provide a back-of-the-envelope estimate of the costs of constructing NEED. We do so by scaling up the construction costs of several existing projects.

The most recent and comparable construction to NEED is that of the 33.9-km-long Saemangeum Seawall.<sup>4</sup> Using the ratio of the volume of the Saemangeum Seawall (0.34 km<sup>3</sup>) and of NEED (36.1 km<sup>3</sup>), multiplied by the cost of the Saemangeum Seawall (1.83 billion euros, 2018 value), we find an estimate of 192 billion euros to construct NEED. The Maasvlakte 2 is a 20-km<sup>2</sup> extension of the Rotterdam harbor that includes hard and soft flood protection and basic infrastructure such as quays, rail track, and roads.<sup>5</sup> Land was reclaimed from 17-m depth to 5 m above sea level, using 0.24 km<sup>3</sup> of sand at a total cost of 3.38 billion euros (2018 value). When we use volume to scale up the total cost (including infrastructure), we estimate a cost of 508 billion euros to construct NEED. Finally, by assuming that dike height and construction costs scale linearly and with an upper estimate of 42 million euros per kilometer for an enclosure dam at depths of 10 m (Dronkers et al. 1990b; Jonkman et al. 2013), we estimate 313 billion euros for the construction of NEED.

In addition to the construction of the dam itself, several discharge pumping stations must be included. When considering the total discharge scaled with the cost and capacity of the pumps of either the Afsluitdijk (200 million euros) or New Orleans (500 million euros), this

<sup>4</sup> [www.korea.net/NewsFocus/policies/view?articleid=89560](http://www.korea.net/NewsFocus/policies/view?articleid=89560)

<sup>5</sup> [www.maasvlakte2.com/en/index/](http://www.maasvlakte2.com/en/index/)

would add an additional 20–33 billion euros. If the construction of sluices is required, this would add additional costs.

Combining all the above, we estimate the total costs to be roughly 250–550 billion euros. When assuming a 20-yr construction time over which to spread the costs, this gives an annual expense of 0.07%–0.16% of the combined gross domestic product (GDP) of the 15 involved countries.<sup>6</sup> The United Kingdom, the Netherlands, Germany, Belgium, and Denmark would likely drive the construction of NEED because of their awareness of SLR, their vulnerability, or both (Tol et al. 2008). For these five countries alone, the total expenses would amount to 0.15%–0.32% of their GDP, annually for 20 years. These numbers are achievable and pose no financial limitation, even when fewer countries contribute.

<sup>6</sup> Using 2019 GDP rates, downloaded from [www.imf.org/external/datamapper/PPPGDP@WEO/OEMDC/ADVEC/WEOWORLDon22-11-2019](http://www.imf.org/external/datamapper/PPPGDP@WEO/OEMDC/ADVEC/WEOWORLDon22-11-2019).

**Comparing NEED to ongoing national protection measures.** With about a third of the country and 4 million people already below sea level, the Netherlands currently has about 3,600 km of flood protection in place against flooding from rivers and SLR along the coast (Kok et al. 2008). The protection consists of hard protection (dikes, enclosure dams), soft protection (beaches nourishment, dunes), and managed flooding (van Staveren et al. 2014). Although the Netherlands may be able to continue current protection measures for 2–3 m of SLR (Hinkel et al. 2018; Stronkhorst et al. 2018), over 5 m of SLR leads to protection costs up to 18 billion euros per year (Olsthoorn et al. 2008; Stolwijk and Verrips 2000) and exceed the cost of evacuation (Hinkel et al. 2018), while also reaching technical limitations (Tol et al. 2006).

A low-end estimate suggests Dutch protection will increase from 0.35 to possibly 1.5 billion euros per year in 2200 for 2-m SLR, with a total cost of over 100 billion euros (Kok et al. 2008). Other estimates suggest that continuing ongoing protection measures in the Netherlands for SLR up to 1.5 m in 2100, the cost range from 1.6 to 3.1 billion euros per year until 2050 with an integrated costs of 32–140 billion euros in 2100 (0.1%–0.5% of the GDP annually) (Aerts et al. 2008; Kabat et al. 2009; Hinkel et al. 2018). In short, for only 1.5-m SLR, protecting the Netherlands is about one-third of the costs of NEED. For more SLR, protection quickly becomes technically and financially challenging and possibly unsustainable. Therefore, we argue that integrated over the next 100–200 years, even for the Netherlands alone, NEED may both technically and financially be a better solution than scaling up existing protection measures.

For countries other than the Netherlands, there are fewer estimates available that detail costs of protection against SLR, but we here discuss a few. In Germany, an SLR of 1 m would put more than 300,000 people at risk in the coastal cities and communities, and economic values endangered by flooding and erosion would amount to more than 270 billion euros (Sterr 2008). With 3,700 km of German coast, ongoing improvements of SLR protection measures may become too costly and alternative measure may have to be found (Sterr 2008). In 1990 it was estimated that 80 billion U.S. dollars (140 billion euros in 2018 values) of protection cost were needed to protect western and northern Europe and the Baltic coast against a 1-m SLR (Dronkers et al. 1990b). As SLR may already reach 1 m in 2100, actual costs are likely to quickly become much higher.

**NEED as the optimal financial solution.** Based on the discussion above, we conjecture that protection of other coastal areas and cities against SLR exceeding 2 m, will quickly become multibillion euro investments. For SLR of even a few meters, we expect that the integrated cost of individual protection of all 15 countries together far exceeds the costs of constructing NEED. For protection against long-term SLR projection (>10 m), NEED is almost certainly the least costly option.

## Furthering the debate

Technical and financial consideration on constructing NEED have so far not excluded NEED as a possible solution to address the threat of SLR to northern Europe. Regardless of the initial reluctance to construct NEED, this motivates to further progress the debate and provide our preliminary view on the possible impact of NEED on the environment, society and politics.

We do so by focusing on the impact of NEED on ocean dynamics, which describes fundamental changes that feed into higher-order changes such as that of biodiversity. To remain within the scope of this study, we only roughly extrapolate the dynamical results to gain some preliminary insight of other major impacts that may be expected.

**Impact on ocean dynamics and the environment.** The impact of NEED on ocean circulation is quantified using simulations with a version of the numerical ocean model NEMO that explicitly resolves tides (details in appendix C). The computational domain covers the northeast Atlantic including the North Sea. The results are shown for simulations with and without NEED constructed (Fig. 3).

Under current circumstances, a tidal Kelvin wave propagates around the North Sea basin in an anticlockwise manner, leading to large tidal amplitudes ( $>1$  m) and velocities ( $>2$  m s<sup>-1</sup>; Fig. 3a) (Otto et al. 1990). This sets up a circulation in which water is entering the North Sea between the Orkney and Shetland Islands and exiting along the Norwegian coast. Due to the construction of NEED, the Kelvin wave is obstructed from entering the basin and the tidal amplitude inside the basin becomes very small (Figs. 3b and C3). Instead, the new geometry causes the tidal amplitude to increase by about 0.7 m along the coasts of southwestern England and Wales and about 0.4 m for northwestern England (Figs. 3 and A1). With NEED constructed, an anticlockwise circulation is set up inside the North Sea basin that is driven by wind, baroclinic circulation from freshwater discharge, and very small tidal motions excited within the basin itself. Furthermore, with the changes in tides and circulation due to the construction of NEED, there should also be an associated change in the location of tidal energy dissipation and mixing. This could, for example, influence overturning circulation outside of the basin.

As such, constructing NEED will unquestionably have a large impact on the circulation and exchange of nutrients, sediment, and small marine life within the enclosure and possibly outside of the enclosure in the Atlantic Ocean and along the European Shelf. Changes in atmospheric circulation and rain patterns could also occur. Finally, we note that it remains unclear if the freshening of the enclosed basin can be compensated for. Such compensation could require hundreds of desalination plants and/or a drainage system. The latter would require additional pumps. Without compensation for the freshening, however, wholesale ecosystem changes will occur.

In short, NEED will heavily impact both marine and terrestrial ecosystems inside and outside of the enclosure and, as such, also have social and cultural implications and impact the tourism and fisheries industries. Although the exact details and extent of the consequences for the environment are beyond the scope of this study, certain consequences will oppose people to the idea of constructing NEED. Alternative solutions, however, will undoubtedly also lead to irreversible environmental changes that may be equally undesirable as those associated with the construction of NEED. Therefore, the only way to limit any such impacts is to limit global-mean SLR itself. This can only be achieved by immediate implementation of climate change mitigation efforts such as that of reducing cumulative carbon emissions (Clark et al. 2018).

**Social and cultural implications.** The impact of social and individual factors such as loss of places and culture are difficult to quantify and often subjective, but are real for those experiencing them (Adger et al. 2009). Therefore, such less-quantifiable impacts are important and can limit viability of adaptation measures and warrant a discussion (Stern et al. 2006).

Forced migration leads to loss of property and cultural heritage (Marzeion and Levermann 2014); can cause mental and physical health problems (Schwarz 1997; Oliver-Smith 1991); and can be a large burden on the economic, social, and cultural values in the host area (Wood 1994; Dadush and Niebuhr 2016). Accumulated over a large population (>25 million people for only 2-m SLR; inset Fig. 1), this can significantly disrupt and destabilize societies and cause (inter-) national tension and conflict, beyond the directly affected coastal communities (Hauer et al. 2016; Hauer 2017; Aerts 2017). We therefore take the approach that the adaptation measure with the least disruption of the established society is the least limiting adaptation measure with respect to social and cultural values. In that view, protection is generally preferred over (managed) migration.

Unfortunately, even protection measures may lead to conflicts and can impact human rights (Robinson and Shine 2018). An important example is forced relocation to make space for new constructions or enlargements of existing protection structures such as dikes. NEED, however, would significantly reduce the total length of required protection measures and

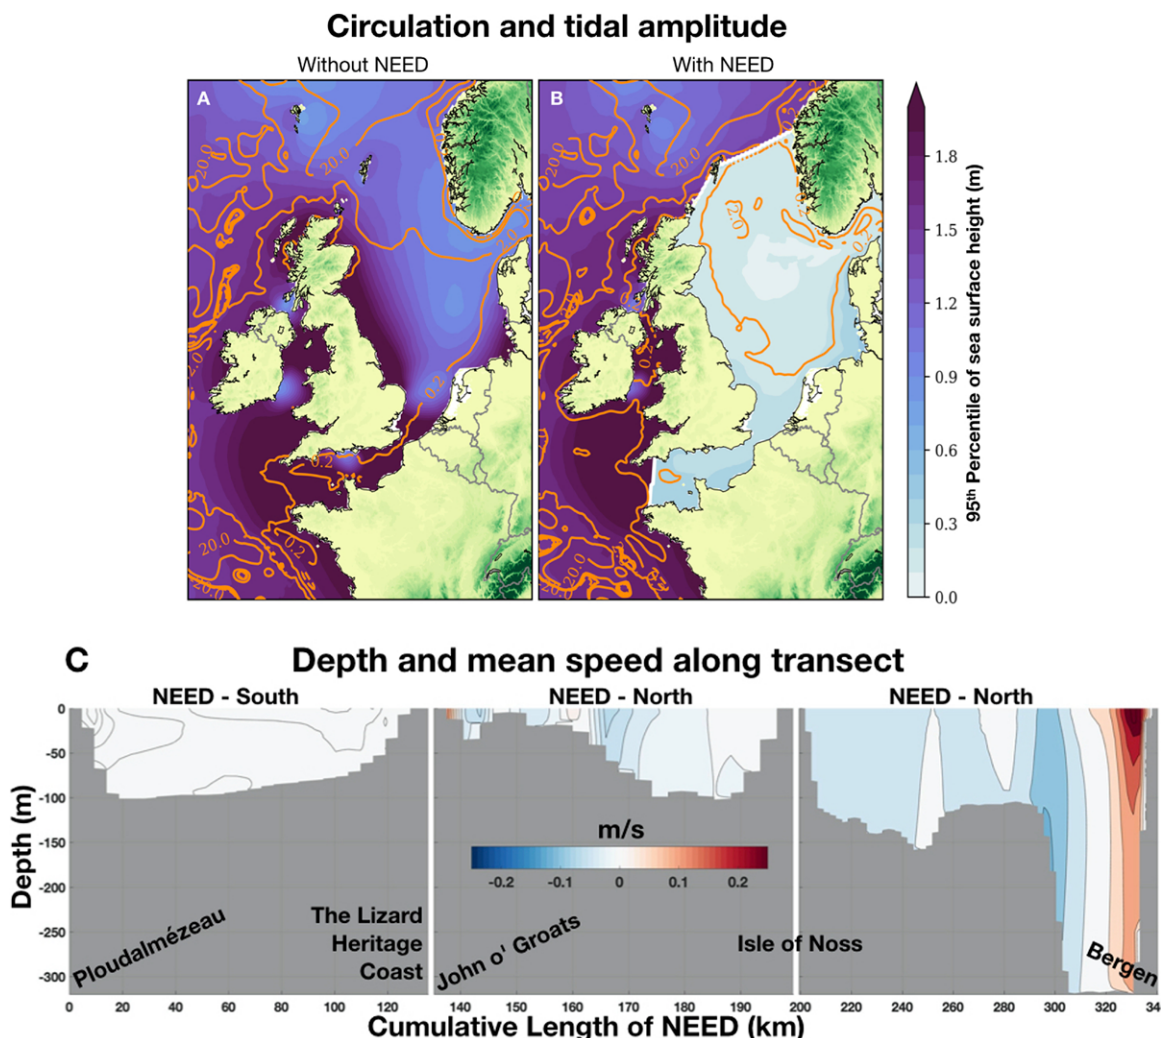


Fig. 3. The circulation and sea surface height (SSH) for a scenario (a) without and (b) with NEED. The SSH is assessed by taking the 95th percentile of the hourly SSH output from the numerical model run and is given by the blue colors (appendix C). Orange contours show the 0.2-, 2-, and 20-Sv contours of the barotropic streamfunction ( $1 \text{ Sv} = 10^6 \text{ m}^3 \text{ s}^{-1}$ ). Solid contours indicate anti-clockwise flow. (c) The bathymetry of the cross section traversed by NEED, split into its southern and northern components. Superimposed is the mean velocity as computed by the numerical simulation (described in appendix C). Note that tidal velocities are averaged out, but could locally reach values over  $1 \text{ m s}^{-1}$ .



place them in areas with a low population density or in the sea. This minimizes the number of people that are negatively affected, and in that regard NEED could be a preferred solution. The conglomeration of all social and cultural advantages and disadvantages of NEED will have to be compared and contrasted against that of alternative solutions.

We hope that the mere suggestion of NEED as a solution, and associated protest, may instigate a thought process that sparks public awareness of the threat that SLR poses, possibly clearing a path for global-scale action to address long-term climate change-related threats.

**Political considerations.** Because SLR is a slow but unstoppable process, there is a central role for long-term coastal adaptation strategies (Döös 1997; Hinkel et al. 2014). Adaptation efforts require substantial institutional, structural, and cultural change, while ongoing impacts are already evident (Hugo 2011; Church et al. 2013). Therefore, an immediate response is required to reduce the negative social, economic, political, and cultural impacts of SLR (Dawson et al. 2005). Unfortunately, large uncertainty in quantifying emission scenarios and limited understanding of the Antarctic ice sheet dynamics (DeConto and Pollard 2016; Kingslake et al. 2017; Spence et al. 2017; Bell et al. 2017; Bronselaer et al. 2018) make it near impossible to construct a cost-benefit analysis (Hallegatte et al. 2016). This leads to divergent views among policy-makers that delays the implementation of adaptation measures (Adger et al. 2009; Haasnoot et al. 2020). Whether policy-makers are capable of delivering a timely response that limits the negative impacts of SLR is heavily contested (Olsthoorn et al. 2008; Biesbroek et al. 2011).

Without new policy, however, SLR will lead to unavoidable and irreversible loss of physical places, cultural heritage, and environmental and ecological systems. In addition, landlocked European countries will also suffer from global-mean SLR as a result of changes in trade, migration, and social-political instabilities (Bosello et al. 2012). Therefore, the question is not if we should start adaptation efforts, but which adaptation measures we should start to implement right now. We take the stand that a policy that has the least direct impact on people's daily life, at reasonable costs, has the largest potential to be implemented with the required urgency to be effective. As NEED would be constructed mostly in the sea (reducing direct impact on people's lives) and may have financial advantages over individual protection measures, it could become a solution with which policy-makers can concur.


A solution such as NEED requires individuals and policy-makers to think in terms of a collaborative and proactive approach that spans across political parties, countries, and generations. That is, a European-wide endeavor that reduces financial costs, improves quality of protection measures, reduces local impacts, and boosts international political and economic ties. As such, NEED represents a solution of the scale that is required to counter the threat we are facing.

**Other mega-enclosures.** Around the world we have identified various other regions in which mega-enclosures such as NEED could serve as a solution to protect against regional SLR. These are the 1) Irish Sea, 2) Japanese Sea, 3) Mediterranean Sea (Gower 2015), 4) Baltic Sea alone (unless covered by NEED), 5) Red Sea, and 6) Persian Gulf (Fig. 4; Schuiling et al. 2005). All these cases require future studies to assess if their potential construction is worthwhile. Furthermore, it has recently been suggested to build seawalls around melting glaciers in Greenland and Antarctica (Moore et al. 2018). Such a construction may potentially reduce the global-mean SLR due to melting, but there are many uncertainties related to the concept (as with NEED) and there would still be some SLR due to thermal expansion. Due to technical, geographical, or financial limitations, many countries will not be able to protect themselves with large enclosures, such that their coastal communities remain unprotected. Hence, limiting future SLR by taking precautions now remains the most effective way forward.

## Mitigation now, or NEED later

It is perhaps impossible to truly fathom the magnitude of the threat that global-mean SLR poses. However, by conceptualizing the scale of the solutions required to protect ourselves against global-mean SLR, we aid our ability to understand this impending danger. The example we provide here is the construction of a 637-km-long Northern European Enclosure Dam (NEED) to protect 15 northern European countries against global-mean SLR. As immense as this solution may seem, our preliminary study suggest that NEED is comparable or sometimes favored in scale, impacts, and challenges to any existing alternative solutions, therefore warranting further investigation. This realization thus illustrates the extraordinary global threat of global-mean SLR that we are facing. However, solutions such as NEED are symptomatic treatments of the effects of climate change. The best solution will always be treatment of the cause: human-caused climate change. If, however, climate change is left unmitigated, only solutions as impactful as NEED, or worse, will remain. We therefore advocate for immediate action to further intensify climate mitigation efforts so that global-mean SLR can be limited and there will be no need for NEED.

**Acknowledgments.** We thank John Church for valuable discussions and encouragements to pursue this work in an early stage of this project. We thank Jonathan Gregory, Matthew England, Casimir de Lavergne, Graeme MacGillchrist, Ryan Holmes, Henryk Dobslaw, and two anonymous reviewers for comments that improved this work. We also thank James Harle and Andrew Coward for assistance in setting up the AMM7 model configuration. All numerical simulations were carried out and funded by at the ECMWF HPCF as part of the ECMWF special project “In case mitigation fails: Exploring alternative methods to protect Europe against sea level rise, using the NEMO ocean model.” S. G. acknowledges support from the Australian Research Council Grant FL150100090.

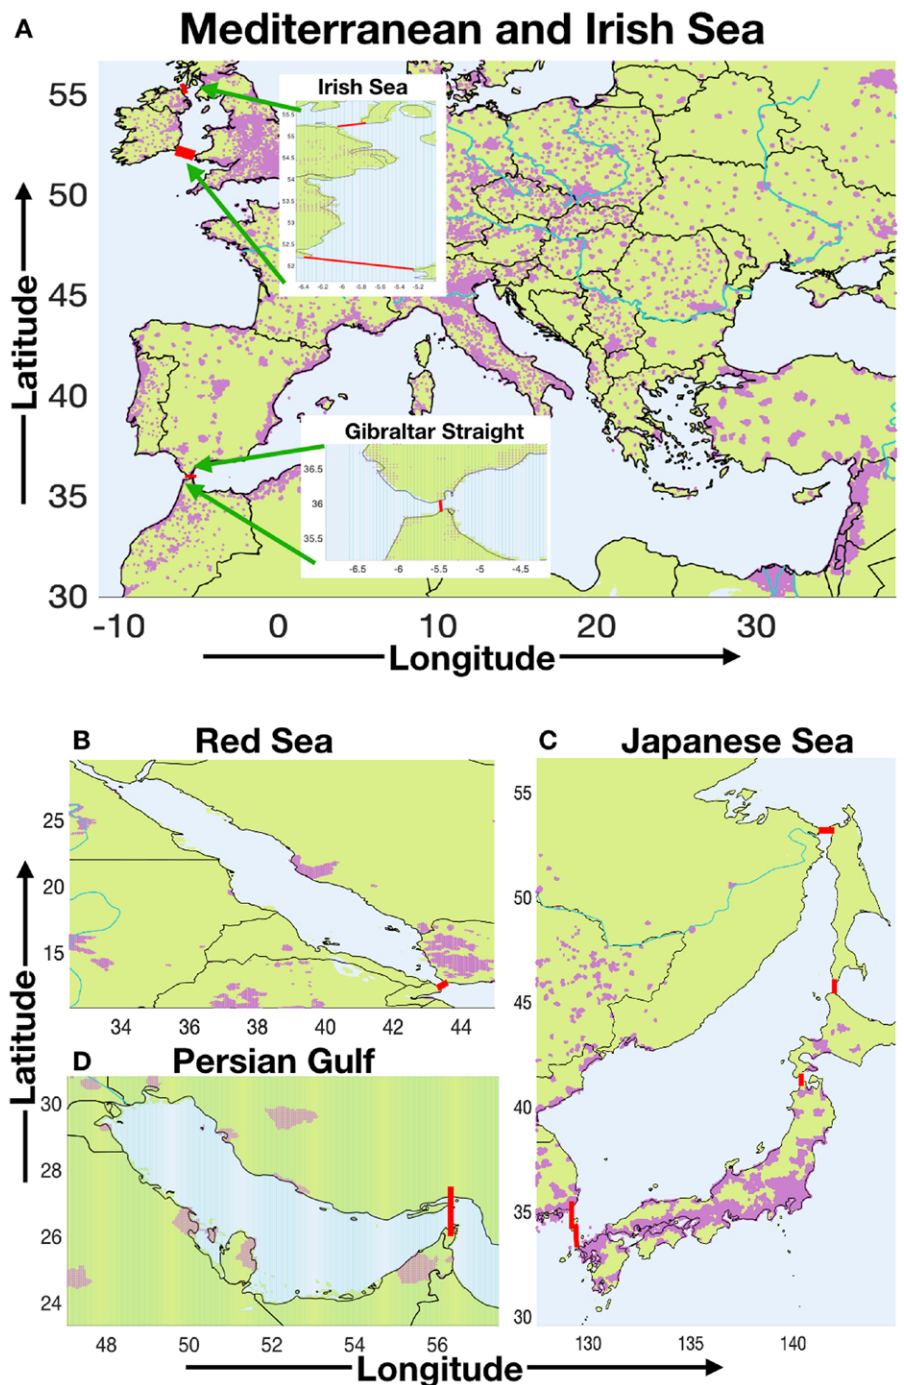

**Fig. 4.** Various other regions in which mega-enclosures such as NEED could serve as a solution to regional sea level rise. These are the (a) Irish and Mediterranean Seas, (b) Red Sea, (c) Japanese Sea, and (d) Persian Gulf.


**Data Availability Statement.** The output data from the numerical simulations that have been used in this study have been deposited at GEOMAR and are publicly available at [https://thredds.geomar.de/thredds/kjellsson\\_et\\_al\\_2019\\_review/catalog.html](https://thredds.geomar.de/thredds/kjellsson_et_al_2019_review/catalog.html). The Gridded Population of the World (GPW), v4.10, data (CIESIN 2017) that support the findings of this study are available from <http://sedac.ciesin.columbia.edu/data/set/gpw-v4-population-density-rev10/data-download>. The 2-Minute Gridded Global Relief Data (ETOPO2v2) data (Smith and Sandwell 1997) that support the findings of this study are available from [www.ngdc.noaa.gov/mgg/global/etopo2.html](http://www.ngdc.noaa.gov/mgg/global/etopo2.html). The Common Ocean Reference Experiment (CORE.2) Global Air-Sea Flux Dataset (Yeager and Large 2008) that support the findings of this study are available from <https://rda.ucar.edu/datasets/ds260.2/\#!description>. TPX09 tidal data set is available from [www.tpxo.net/global/tpxo9-atlas](http://www.tpxo.net/global/tpxo9-atlas).

**Code Availability.** The scripts used to generate figures and statistics that support this study are available at <https://git.geomar.de/joakim-kjellsson/nemo-scripts/tree/need>.

## Appendix A: Alternative configurations

Alternative configurations at different locations would decrease the length and depth of NEED. For example, NEED-south could be moved to be parallel to the French–English Channel Tunnel. Numerical simulations show that such a configuration would reduce the tidal amplitudes at the west coast of England compared to the configuration in Fig. 1. However, it would increase the tidal amplitudes in the English Channel and also leave many of the cities along the English Channel unprotected (Fig. A1). In a similar way, NEED-north could be moved south, allowing for various possible combinations to connect the United Kingdom to Norway, possibly even via Denmark. This move mostly reduces dam height but not length of the enclosure, while it may also amplify the tidal amplitude north of the enclosure and will reduce the number of people protected. Therefore, we think that the presented form of NEED is probably the optimal balance between financial and technical feasibility and population protection.

### Comparing tides, before and after the constructions of NEED.

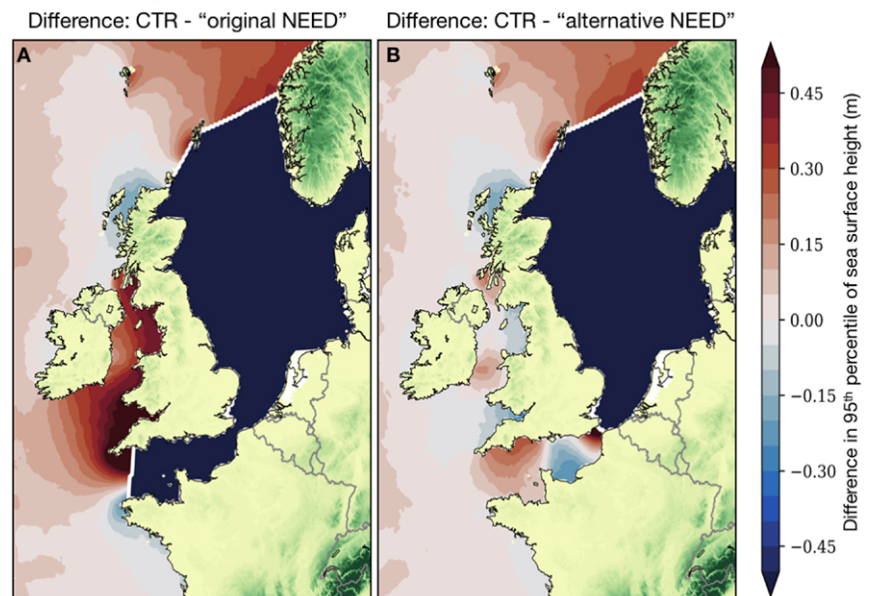

**Fig. A1.** The difference in the 95th percentile of hourly SSH output in model runs with and without NEED. (a) The difference between normal circumstances and the “original” version of NEED (as in Fig. 1) shows a strong increase in the 95th-percentile SSH along the western United Kingdom. (b) The difference between normal circumstances and the “alternative” version of NEED (with NEED-south along the Channel Tunnel) shows a strong increase in the 95th-percentile SSH along the French–English Channel, and less so along the western United Kingdom.

## Appendix B: Freshening of the basin

Using both the CORE2 atmospheric data (Large and Yeager 2009) and ERA-Interim (Dee et al. 2011), the net freshwater input into the enclosure is estimated to be at most  $40,000 \text{ m}^3 \text{ s}^{-1}$ , of which  $-24,000 \text{ m}^3 \text{ s}^{-1}$  is due to evaporation  $E$ ,  $35,000 \text{ m}^3 \text{ s}^{-1}$  due to precipitation  $P$ , and  $29,000 \text{ m}^3 \text{ s}^{-1}$  due to river runoff  $R$ . The enclosure has an area of about  $1.0 \times 10^6 \text{ km}^2$  (Smith and Sandwell 1997) which, combined with the net freshwater flux  $D = P + R + E$ , would lead to a SLR within the basin of  $\sim 0.9 \text{ m yr}^{-1}$ . Therefore, the  $40,000 \text{ m}^3 \text{ s}^{-1}$  of seawater would

need to be pumped out of the basin into the Atlantic Ocean. The net input of freshwater would also cause a freshening of the basin. A freshening time scale can be calculated using the equivalent salt flux (Huang 1993; Nurser and Griffies 2019) and assuming that the amount of freshwater discharge  $D$  is pumped out with a salinity  $S$ . The change in salinity of the basin is then given by  $dS/dt = -DS/V$ , where  $V \approx 5.8 \times 10^{13} \text{ m}^3$  is the volume of the North Sea basin and English Channel combined. The solution  $S(t) \sim \exp(-tD/V)$  can be used to infer the time it takes to reduce the salinity by a factor of 10, which is  $\Delta t = VD^{-1} \ln(0.1) \approx 106$  years.

### Appendix C: Numerical model details

The ocean circulation of the European shelf is simulated using the AMM7 configuration (O’Dea et al. 2017; Graham et al. 2018) of the NEMO ocean model, version 3.6 (Madec et al. 2016). The AMM7 grid has a 7-km horizontal resolution with 51 vertical  $z$ - $\sigma$  levels and explicitly simulates 15 tidal components ( $Q_1, O_1, P_1, S_1, K_1, 2n_2, Mu_2, N_2, Nu_2, M_2, L_2, T_2, S_2, K_2, M_4$ ) inside the model domain, including boundary conditions from the TPXO 7.2 Global Tidal Solution (Egbert and Erofeeva 2002) and the inverse barometer effect. Lateral boundary conditions of baroclinic velocities and temperature and salinity are taken from a global simulation at  $1/4^\circ$  horizontal resolution (without tides) to the north, south, and west (Graham et al. 2018). Boundary conditions of the Skagerrak basin are taken from a regional Baltic Sea simulation at  $1/60^\circ$  that resolves the Arkona basin flow. Atmospheric forcing is taken from ERA-Interim (Dee et al. 2011). The model time step is 300 s and a 10-s subcycle for barotropic modes and uses a bi-Laplacian lateral viscosity of  $A_{h,m} = -1.25 \times 10^{10} \text{ m}^4 \text{ s}^{-1}$  and a Laplacian lateral diffusion of  $A_{h,t} = 125 \text{ m}^2 \text{ s}^{-1}$ . Vertical mixing is parameterized by the GLS scheme with settings equivalent to a  $k$ - $\epsilon$  scheme.

## Comparing model tides to “real” tides - Amplitude

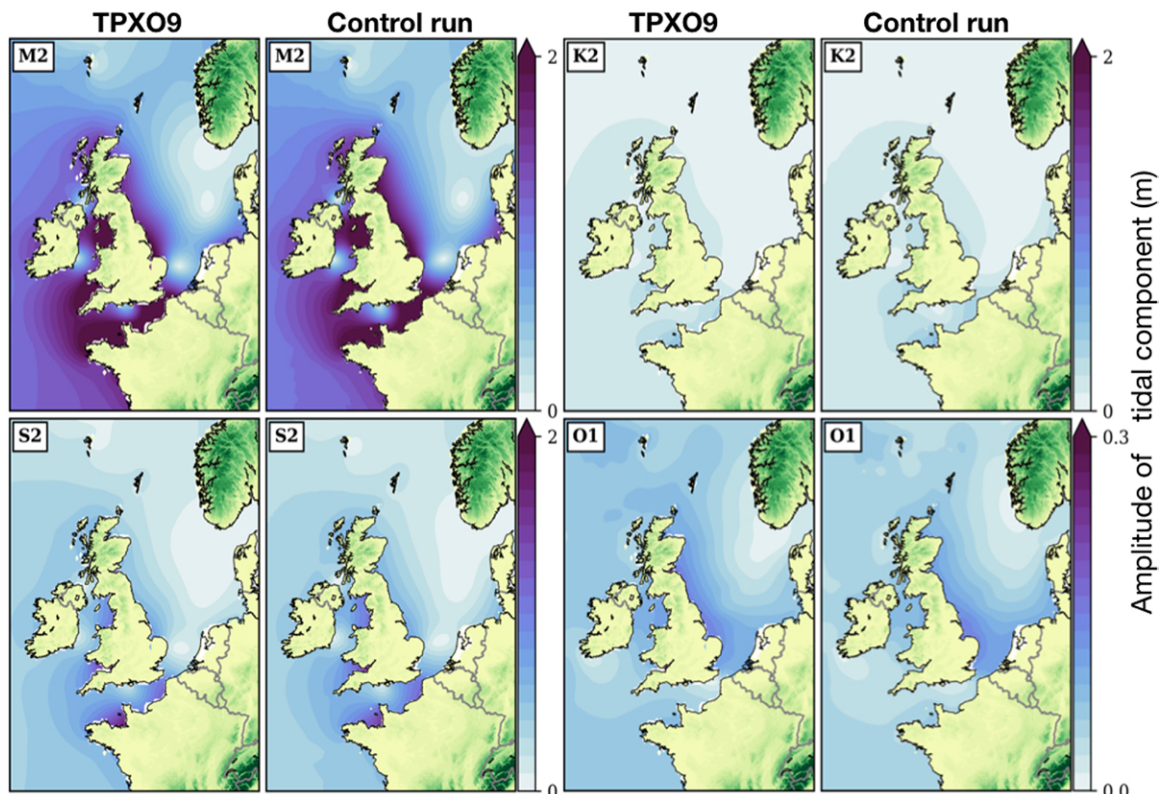


Fig. C1. Amplitudes of the major tidal components in TPXO9 tidal analysis and the AMM7-CTRL simulation.

## Comparing model tides to “real” tides - Phase

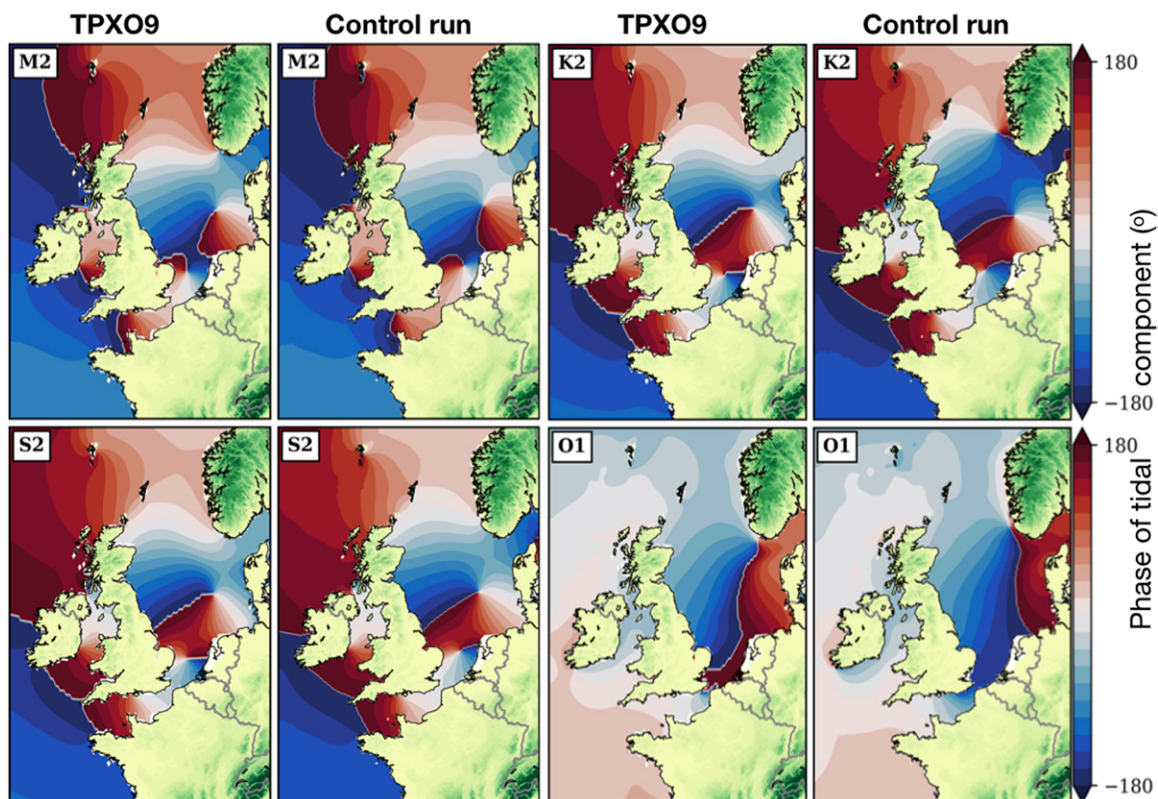


Fig. C2. Phases of the major tidal components in TPX09 tidal analysis and the AMM7-CTRL simulation.

## Tidal Amplitudes with and without NEED

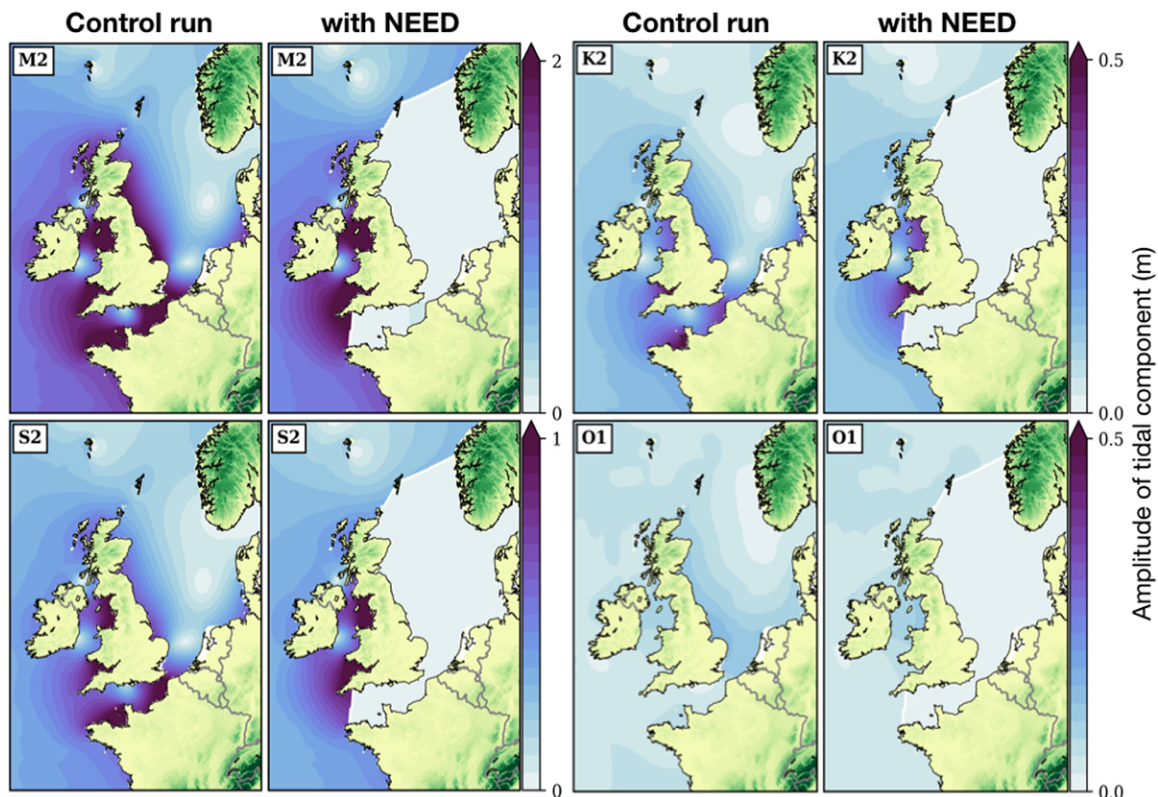


Fig. C3. Amplitudes for the major tidal components in AMM7-NEED (with NEED constructed) and AMM7-CTRL (control run). Note the slight increase in tidal amplitudes of  $M_2$  and  $S_2$  along the west coast of England and Wales.

We perform three simulations of the year 1981, a control run (AMM7-CTRL), a run with NEED as proposed in Fig. 1 (AMM7-NEED), and a run with NEED but NEED-south placed between Dover and Calais (AMM7-TUNNEL). Amplitudes and phases for 15 tidal components in the AMM7 simulation are calculated using the built-in harmonic analysis diagnostics in NEMO. We compare and contrast the amplitudes and phases of the tidal components in our control simulation AMM7-CTRL, to the TPX09 tidal solution, which is based on a global barotropic model at  $1/6^\circ$  horizontal resolution and assimilates data from various satellite altimeter sources (Egbert and Erofeeva 2002). The AMM7-CTRL simulation accurately simulates the amplitudes and phases of the major tidal components on the European shelf (Figs. C1 and C2) as previously found by other studies (O’Dea et al. 2017; Graham et al. 2018). Constructing NEED leads to distinct modifications of the major tidal components (Fig. C3).

The barotropic streamfunction is calculated using the 5-daily meridional velocity as

$$\Psi(x, y) = \int_0^{H(x, y)} \int_{x_w}^{x_E} v \, dx \, dz, \quad (\text{C1})$$

where  $H(x, y)$  is the bathymetry, and  $x_w$ , and  $x_E$  are the western and eastern boundaries of the domain.

The velocities shown in Fig. 3c are computed by taking the time-mean velocity over the 5-daily output for the subsurface velocities and rotating them to be positive out of the North Sea, that is, approximately positive westward for the southern part of NEED and northwestward for the northern part of NEED. The velocities have been interpolated from the  $z$ - $\sigma$  vertical grid used in the model to fixed depth levels using the time-mean depths of each model level.

## References

- Adger, W. N., and Coauthors, 2009: Are there social limits to adaptation to climate change? *Climatic Change*, **93**, 335–354, <https://doi.org/10.1007/s10584-008-9520-z>.
- Aerts, J. C. J. H., 2017: Impacts beyond the coast. *Nat. Climate Change*, **7**, 315–316, <https://doi.org/10.1038/nclimate3279>.
- , T. Sprong, and B. Bannink, Eds., 2008: Aandacht voor Veiligheid. Tech. Rep., AVV, 195 pp., <http://resolver.tudelft.nl/uuid:a083a598-ab79-4ce3-9861-e366dea23d6d>.
- Bars, D. L., S. Drijfhout, and H. de Vries, 2017: A high-end sea level rise probabilistic projection including rapid antarctic ice sheet mass loss. *Environ. Res. Lett.*, **12**, 044013, <https://doi.org/10.1088/1748-9326/AA6512>.
- Bell, R. E., and Coauthors, 2017: Antarctic ice shelf potentially stabilized by export of meltwater in surface river. *Nature*, **544**, 344–348, <https://doi.org/10.1038/nature22048>.
- Biesbroek, R., J. Klostermann, C. Termeer, and P. Kabat, 2011: Barriers to climate change adaptation in the Netherlands. *Climate Law*, **2**, 181–199, <https://doi.org/10.1163/CL-2011-033>.
- Bosello, F., R. J. Nicholls, J. Richards, R. Roson, and R. S. J. Tol, 2012: Economic impacts of climate change in Europe: Sea-level rise. *Climatic Change*, **112**, 63–81, <https://doi.org/10.1007/s10584-011-0340-1>.
- Bronselaer, B., M. Winton, S. M. Griffies, W. J. Hurlin, K. B. Rodgers, O. V. Sergienko, R. J. Stouffer, and J. L. Russell, 2018: Change in future climate due to Antarctic meltwater. *Nature*, **564**, 53–58, <https://doi.org/10.1038/s41586-018-0712-z>.
- Church, J. A., and N. J. White, 2011: Sea-level rise from the late 19th to the early 21st century. *Surv. Geophys.*, **32**, 585–602, <https://doi.org/10.1007/s10712-011-9119-1>.
- , and Coauthors, 2013: Sea level change. *Climate Change 2013: The Physical Science Basis*, T. F. Stocker et al., Eds., Cambridge University Press, 1137–1216.
- CIESIN, 2017: Gridded Population of the World, version 4 (gpwv4): Population density, revision 10. NASA Socioeconomic Data and Applications Center, accessed 1 March 2018, <https://doi.org/10.7927/H4DZ068D>.
- Clark, P. U., A. C. Mix, M. Eby, A. Levermann, J. Rogelj, A. Nauels, and D. J. Wrathall, 2018: Sea-level commitment as a gauge for climate policy. *Nat. Climate Change*, **8**, 653–655, <https://doi.org/10.1038/s41586-018-0226-6>.
- Dadush, U., and M. Niebuhr, 2016: The economic impact of forced migration. Research Papers & Policy Papers 1605, Policy Center for the New South, <https://ideas.repec.org/p/ocp/rpaper/pp-16-05.html>.
- Dawson, R. J., J. W. Hall, P. D. Bates, and R. J. Nicholls, 2005: Quantified analysis of the probability of flooding in the Thames Estuary under imaginable worst-case sea level rise scenarios. *Int. J. Water Resour. Dev.*, **21**, 577–591, <https://doi.org/10.1080/07900620500258380>.
- DeConto, R. M., and D. Pollard, 2016: Contribution of Antarctica to past and future sea-level rise. *Nature*, **531**, 591–597, <https://doi.org/10.1038/nature17145>.
- Dee, D. P., and Coauthors, 2011: The ERA-Interim reanalysis: Configuration and performance of the data assimilation system. *Quart. J. Roy. Meteor. Soc.*, **137**, 553–597, <http://doi.org/10.1002/qj.828>.
- Diaz, D. B., 2016: Estimating global damages from sea level rise with the Coastal Impact and Adaptation Model (CIAM). *Climatic Change*, **137**, 143–156, <https://doi.org/10.1007/s10584-016-1675-4>.
- Döös, B. R., 1997: Can large-scale environmental migrations be predicted? *Global Environ. Change*, **7**, 41–61, [https://doi.org/10.1016/S0959-3780\(96\)00037-4](https://doi.org/10.1016/S0959-3780(96)00037-4).
- Dronkers, J., and Coauthors, 1990a: Strategies for adaptation to sea level rise. Rep. of the IPCC Coastal Zone Management Subgroup, 131 pp.
- , and Coauthors, 1990b: Sea-level rise: A world-wide cost estimate of basic coastal defence measures. Tech. Rep. H1068, Delft Hydraulics (prepared for the IPCC and Rijkswaterstaat), 29 pp.
- Edwards, T. L., and Coauthors, 2019: Revisiting antarctic ice loss due to marine ice-cliff instability. *Nature*, **566**, 58–64, <https://doi.org/10.1038/s41586-019-0901-4>.
- Egbert, G. D., and S. Y. Erofeeva, 2002: Efficient inverse modeling of barotropic ocean tides. *J. Atmos. Oceanic Technol.*, **19**, 183–204, [https://doi.org/10.1175/1520-0426\(2002\)019<0183:EIMOBO>2.0.CO;2](https://doi.org/10.1175/1520-0426(2002)019<0183:EIMOBO>2.0.CO;2).
- Gower, J. A sea surface height control dam at the Strait of Gibraltar. *Nat Hazards* **78**, 2109–2120 (2015). <https://doi.org/10.1007/s11069-015-1821-8>
- Graham, J. A., and Coauthors, 2018: AMM15: A new high-resolution NEMO configuration for operational simulation of the European north-west shelf. *Geosci. Model Dev.*, **11**, 681–696, <https://doi.org/10.5194/gmd-11-681-2018>.
- Hallegatte, S., and Coauthors, 2016: Mapping the climate change challenge. *Nat. Climate Change*, **6**, 663–668, <https://doi.org/10.1038/nclimate3057>.
- Hauer, M. E., 2017: Migration induced by sea-level rise could reshape the US population landscape. *Nat. Climate Change*, **7**, 321–325, <https://doi.org/10.1038/nclimate3271>.
- , J. M. Evans, and D. R. Mishra, 2016: Millions projected to be at risk from sea-level rise in the continental United States. *Nat. Climate Change*, **6**, 691–695, <https://doi.org/10.1038/nclimate2961>.
- Haustein, K., M. R. Allen, P. M. Forster, F. E. L. Otto, D. M. Mitchell, H. D. Matthews, and D. J. Frame, 2017: A real-time global warming index. *Sci. Rep.*, **7**, 15417, <https://doi.org/10.1038/s41598-017-14828-5>.
- Hinkel, J., and Coauthors, 2014: Coastal flood damage and adaptation costs under 21st century sea-level rise. *Proc. Natl. Acad. Sci. USA*, **111**, 3292–3297, <https://doi.org/10.1073/pnas.1222469111>.
- , and Coauthors, 2018: The ability of societies to adapt to twenty-first-century sea-level rise. *Nat. Climate Change*, **8**, 570–578, <https://doi.org/10.1038/s41586-018-0176-z>.
- Haasnoot, M., and Coauthors, 2020: Adaptation to uncertain sea-level rise; how uncertainty in Antarctic mass-loss impacts the coastal adaptation strategy of the Netherlands. *Environ. Res. Lett.*, **15**, 034007, <https://doi.org/10.1088/1748-9326/15/3/034007>.
- Hino, M., C. B. Field, and K. J. Mach, 2017: Managed retreat as a response to natural hazard risk. *Nat. Climate Change*, **7**, 364–370, <https://doi.org/10.1038/nclimate3252>.
- Huang, R. X., 1993: Real freshwater flux as a natural boundary condition for the salinity balance and thermohaline circulation forced by evaporation and precipitation. *J. Phys. Oceanogr.*, **23**, 2428–2446, [https://doi.org/10.1175/1520-0485\(1993\)023%3C2428:RFFAAN%3E2.0.CO;2](https://doi.org/10.1175/1520-0485(1993)023%3C2428:RFFAAN%3E2.0.CO;2).
- Hugo, G., 2011: Future demographic change and its interactions with migration and climate change. *Global Environ. Change*, **21**, S21–S33, <https://doi.org/10.1016/j.gloenvcha.2011.09.008>.
- Jevrejeva, S., A. Grinsted, and J. C. Moore, 2014: Upper limit for sea level projections by 2100. *Environ. Res. Lett.*, **9**, 104008, <https://doi.org/10.1088/1748-9326/9/10/104008>.
- Jonkman, S. N., M. M. Hillen, R. J. Nicholls, W. Kanning, and M. van Ledden, 2013: Costs of adapting coastal defences to sea-level rise—New estimates and their implications. *J. Coastal Res.*, **290**, 1212–1226, <https://doi.org/10.2112/JCOASTRES-D-12-00230.1>.
- Kabat, P., L. O. Fresco, M. J. F. Stive, C. P. Veerman, J. S. L. J. van Alphen, B. W. A. H. Parment, W. Hazeleger, and C. A. Katsman, 2009: Dutch coasts in transition. *Nat. Geosci.*, **2**, 450–452, <https://doi.org/10.1038/ngeo572>.
- Kingslake, J., J. C. Ely, I. Das, and R. E. Bell, 2017: Widespread movement of meltwater onto and across antarctic ice shelves. *Nature*, **544**, 349–352, <https://doi.org/10.1038/nature22049>.
- Kok, M., S. Jonkman, W. Kanning, T. Rijcken, and J. Stijnen, 2008: Toekomst voor het nederlandse polderconcept. Tech. rep., HKV-Lijn in het water, 137 pp., <http://resolver.tudelft.nl/uuid:fc457df5-146d-4290-b727-4ef97d2ac0b2>.
- Kopp, R. E., R. M. Horton, C. M. Little, J. X. Mitrovica, M. Oppenheimer, D. J. Rasmussen, B. H. Strauss, and C. Tebaldi, 2014: Probabilistic 21st and 22nd century sea-level projections at a global network of tide-gauge sites. *Earth's Future*, **2**, 383–406, <https://doi.org/10.1002/2014EF000239>.
- Large, W. G., and S. Yeager, 2009: The global climatology of an interannually varying air-sea flux data set. *Climate Dyn.*, **33**, 341–364, <https://doi.org/10.1007/s00382-008-0441-3>.

- Levermann, A., P. U. Clark, B. Marzeion, G. A. Milne, D. Pollard, V. Radic, and A. Robinson, 2013: The multimillennial sea-level commitment of global warming. *Proc. Natl. Acad. Sci. USA*, **110**, 13745–13750, <https://doi.org/10.1073/pnas.1219414110>.
- Maded, G., and NEMO Team, 2016: NEMO ocean engine. Note du Pôle de modélisation de l'Institut Pierre-Simon Laplace 27, 386 pp., [www.nemo-ocean.eu/wp-content/uploads/NEMO\\_book.pdf](http://www.nemo-ocean.eu/wp-content/uploads/NEMO_book.pdf).
- Marzeion, B., and A. Levermann, 2014: Loss of cultural world heritage and currently inhabited places to sea-level rise. *Environ. Res. Lett.*, **9**, 034001, <https://doi.org/10.1088/1748-9326/9/3/034001>.
- Moore, J. C., R. Gladstone, T. Zwinger, and M. Wolovick, 2018: Geoengineer polar glaciers to slow sea-level rise. *Nature*, **555**, 303–305, <https://doi.org/10.1038/d41586-018-03036-4>.
- Nicholls, R. J., 2011: Planning for the impacts of sea level rise. *Oceanography*, **24**, 144–157, <https://doi.org/10.5670/oceanog.2011.34>.
- , and R. J. T. Klein, 2005: *Climate Change and Coastal Management on Europe's Coast*. Springer, 199–226.
- Nurser, A. J. G., and S. M. Griffies, 2019: Relating the diffusive salt flux just below the ocean surface to boundary freshwater and salt fluxes. *J. Phys. Oceanogr.*, **49**, 2365–2376, <https://doi.org/10.1175/JPO-D-19-0037.1>.
- O'Dea, E., and Coauthors, 2017: The CO5 configuration of the 7 km Atlantic margin model: Large-scale biases and sensitivity to forcing, physics options and vertical resolution. *Geosci. Model Dev.*, **10**, 2947–2969, <https://doi.org/10.5194/gmd-10-2947-2017>.
- Oliver-Smith, A., 1991: Involuntary resettlement, resistance and political empowerment. *J. Refug. Stud.*, **4**, 132–149, <https://doi.org/10.1093/jrs/4.2.132>.
- Olsthoorn, X., P. van der Werff, L. M. Bouwer, and D. Huitema, 2008: Neo-Atlantis: The Netherlands under a 5-m sea level rise. *Climatic Change*, **91**, 103–122, <https://doi.org/10.1007/s10584-008-9423-z>.
- Otto, L., J. T. F. Zimmerman, G. K. Furnes, M. Mork, R. Saetre, and G. Becker, 1990: Review of the physical oceanography of the North Sea. *Neth. J. Sea Res.*, **26**, 161–238, [https://doi.org/10.1016/0077-7579\(90\)90091-T](https://doi.org/10.1016/0077-7579(90)90091-T).
- Peduzzi, P., 2014: Sand, rarer than one thinks. *Environ. Dev.*, **11**, 208–218, <https://doi.org/10.1016/j.envdev.2014.04.001>.
- Raftery, A. E., A. Zimmer, D. M. W. Frierson, R. Startz, and P. Liu, 2017: Less than 2°C warming by 2100 unlikely. *Nat. Climate Change*, **7**, 637–641, <https://doi.org/10.1038/nclimate3352>.
- Robinson, M., and T. Shine, 2018: Achieving a climate justice pathway to 1.5 °C. *Nat. Climate Change*, **8**, 564–569, <https://doi.org/10.1038/s41558-018-0189-7>.
- Rogelj, J., and Coauthors, 2016: Paris agreement climate proposals need a boost to keep warming well below 2 °C. *Nature*, **534**, 631–639, <https://doi.org/10.1038/nature18307>.
- Schuiling, R. D., V. Badescu, R. B. Cathcart, and P. A. L. C. Van Overveld, 2005: The Hormuz Strait Dam Macroproject—21st Century Electricity Development Infrastructure Node (EDIN)? *Mar. Georesour. Geotechnol.*, **23**, 25–37, <https://doi.org/10.1080/10641190590959920>.
- Schwarz, M. T., 1997: Unraveling the anchoring cord: Navajo relocation, 1974 to 1996. *Amer. Anthropol.*, **99**, 43–55, <https://doi.org/10.1525/aa.1997.99.1.43>.
- Smith, W. H. F., and D. T. Sandwell, 1997: Global sea floor topography from satellite altimetry and ship depth soundings. *Science*, **277**, 1956–1962, <https://doi.org/10.1126/science.277.5334.1956>.
- Spence, P., R. M. Holmes, A. M. Hogg, S. M. Griffies, K. D. Stewart, and M. H. England, 2017: Localized rapid warming of west Antarctic subsurface waters by remote winds. *Nat. Climate Change*, **7**, 595–603, <https://doi.org/10.1038/nclimate3335>.
- Stern, N., and Coauthors, 2006: *Stern Review: The Economics of Climate Change*. HM Treasury London, 692 pp.
- Sterr, H., 2008: Assessment of vulnerability and adaptation to sea-level rise for the coastal zone of Germany. *J. Coastal Res.*, **242**, 380–393, <https://doi.org/10.2112/07A-0011.1>.
- Stolwijk, H., and A. Verrips, 2000: Ruimte voor water. kosten en baten van zes projecten en enige alternatieven (in Dutch). Working Doc. 130, Netherlands Bureau for Economic Policy Analysis, 79 pp.
- Stronkhorst, J., B. Huisman, A. Giardino, G. Santinelli, and F. D. Santos, 2018: Sand nourishment strategies to mitigate coastal erosion and sea level rise at the coasts of Holland (The Netherlands) and Aveiro (Portugal) in the 21st century. *Ocean Coastal Manage.*, **156**, 266–276, <https://doi.org/10.1016/j.ocecoaman.2017.11.017>.
- Tol, R. S. J., and Coauthors, 2006: Adaptation to five metres of sea level rise. *J. Risk Res.*, **9**, 467–482, <https://doi.org/10.1080/13669870600717632>.
- , R. J. T. Klein, and R. J. Nicholls, 2008: Towards successful adaptation to sea-level rise along Europe's coasts. *J. Coastal Res.*, **242**, 432–442, <https://doi.org/10.2112/07A-0016.1>.
- Torres, A., J. Brandt, K. Lear, and J. Liu, 2017: A looming tragedy of the sand commons. *Science*, **357**, 970–971, <https://doi.org/10.1126/science.aao0503>.
- USACE, 2015: West Closure Complex. Tech. doc., Team New Orleans, U.S. Army Corps of Engineers, 2 pp., [www.mvn.usace.army.mil/Portals/56/docs/PAO/FactSheets/Fact%20Sheet%20update%2015/WCC%20Fact%20Sheet%20\(August%202015\).pdf](http://www.mvn.usace.army.mil/Portals/56/docs/PAO/FactSheets/Fact%20Sheet%20update%2015/WCC%20Fact%20Sheet%20(August%202015).pdf).
- van Staveren, M. F., J. F. Warner, J. P. M. van Tatenhove, and P. Wester, 2014: Let's bring in the floods: De-poldering in the Netherlands as a strategy for long-term delta survival? *Water Int.*, **39**, 686–700, <https://doi.org/10.1080/02508060.2014.957510>.
- Wood, W. B., 1994: Forced migration: Local conflicts and international dilemmas. *Ann. Assoc. Amer. Geogr.*, **84**, 607–634, <https://doi.org/10.1111/j.1467-8306.1994.tb01879.x>.
- Yeager, S. G., and W. G. Large, 2008: CORE.2 global air-sea flux dataset. Research Data Archive at the National Center for Atmospheric Research, Computational and Information Systems Laboratory, accessed 26 March 2013, <https://doi.org/10.5065/D6WH2N0S>.