Salinisation and freshening of phreatic groundwater in Zeeland, The Netherlands

Esther van Baaren, Gualbert Oude Essink, Perry de Louw **Deltares, Subsurface and Groundwater Systems, Utrecht, The Netherlands** Contact information: Esther.vanBaaren@deltares.nl More information: http://freshsalt.deltares.nl and http://zoetzout.deltares.nl







Introduction


Fresh groundwater resources on top of the saline groundwater of the Province of Zeeland are jeopardized by anthropogenic activities such as groundwater exploitation and water level management. In addition, land subsidence, sea level rise and climate change threaten the groundwater system even more (Fig. 1).

Aim of the study

1. To get a better insight in the salinisation and freshening processes in the top of the water system (Fig. 2); To quantify changes in freshwater resources, seepage and salt loads from the groundwater to the surface water system;





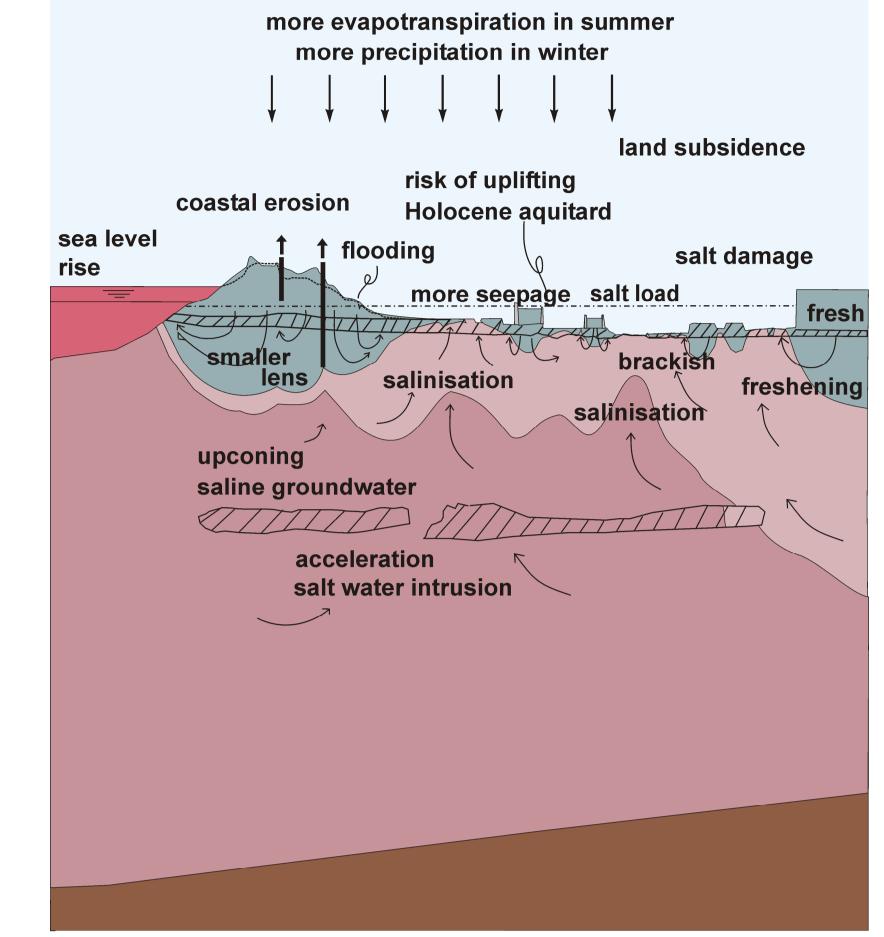

- 3. To analyse what measures are effective to make fresh water supply in this area climate proof;
- 4. To make a more reliable fresh-brackish-saline distribution;
- 5. To construct a flexible tool in order to analyse and quantify subareas on different scales.



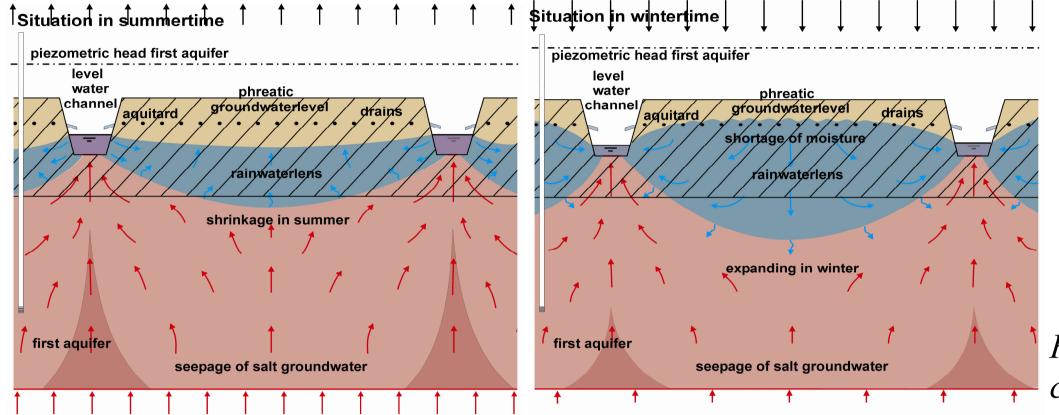


Fig.2: Fresh water lens in summer and winter, along with ditches containing salt water.

Fig. 1: Concepts of salinisation processes in Dutch coastal areas in case of sea level rise and climate change.

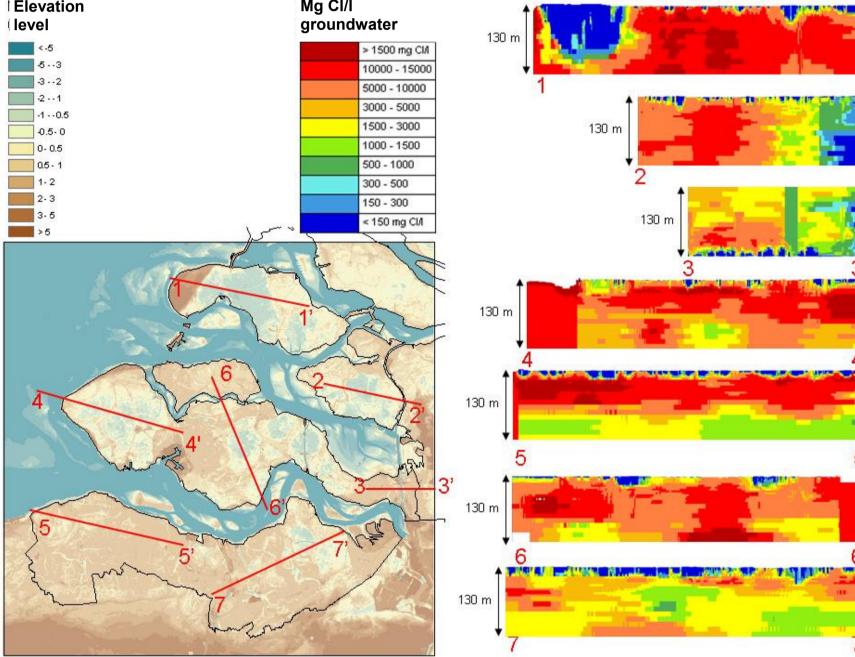

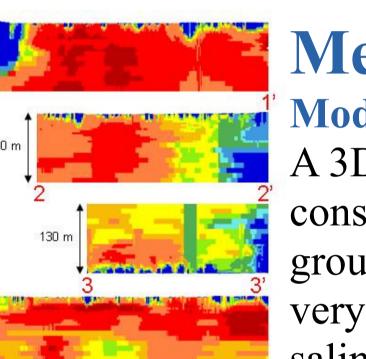

Methods

Model

A 3D density dependent numerical model with a resolution of $100*100 \text{ m}^2$ is constructed with the code MOCDENS3D to consider fresh, brackish and saline groundwater. The latest results of geological modeling are implemented, using very detailed information of the Holocene lithology. As we are interested in the salinity at the top system, we modeled this top part of the system with thin model cells. The model is calibrated with measured head corrected to freshwater heads (Fig. 3).

From chloride measurements to a 3D distribution


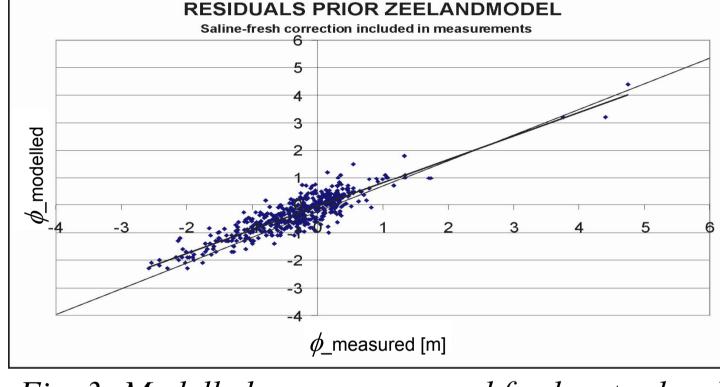



Fig. 3: Modelled versus measured freshwater head.

Fig. 4: model result: chloride concentration in 2010.

Some results

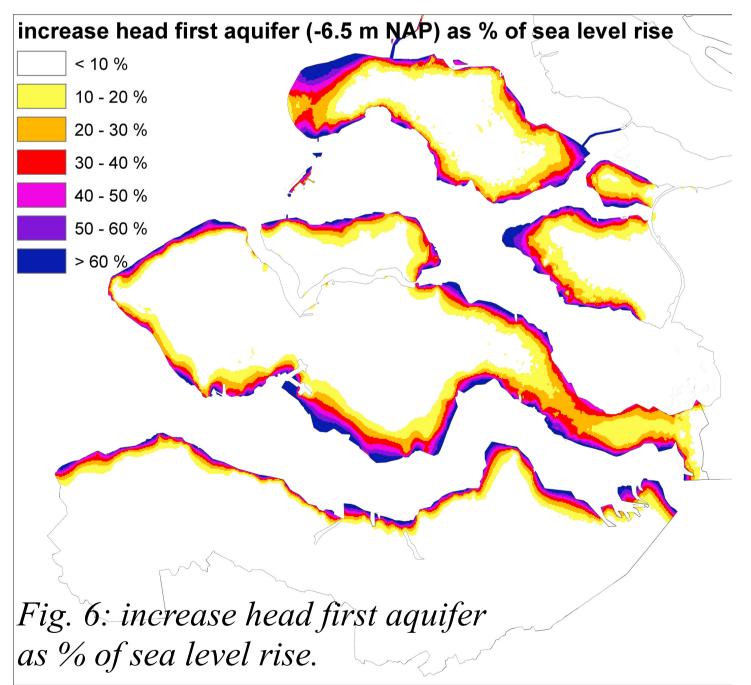


We are able to combine various (geophysical) techniques, such as groundwater samples, geo-electrical borehole logs, electrical CPT, Vertical Electrical Soundings (VES), EM31, EM34, groundwater extractions, CVES and TEC probe data, to improve the first estimate of the chloride distribution. In addition we include the mapped fresh-brackish and brackish-saline interfaces and as third step we use the model as a final interpolator (Fig 4 and 5).

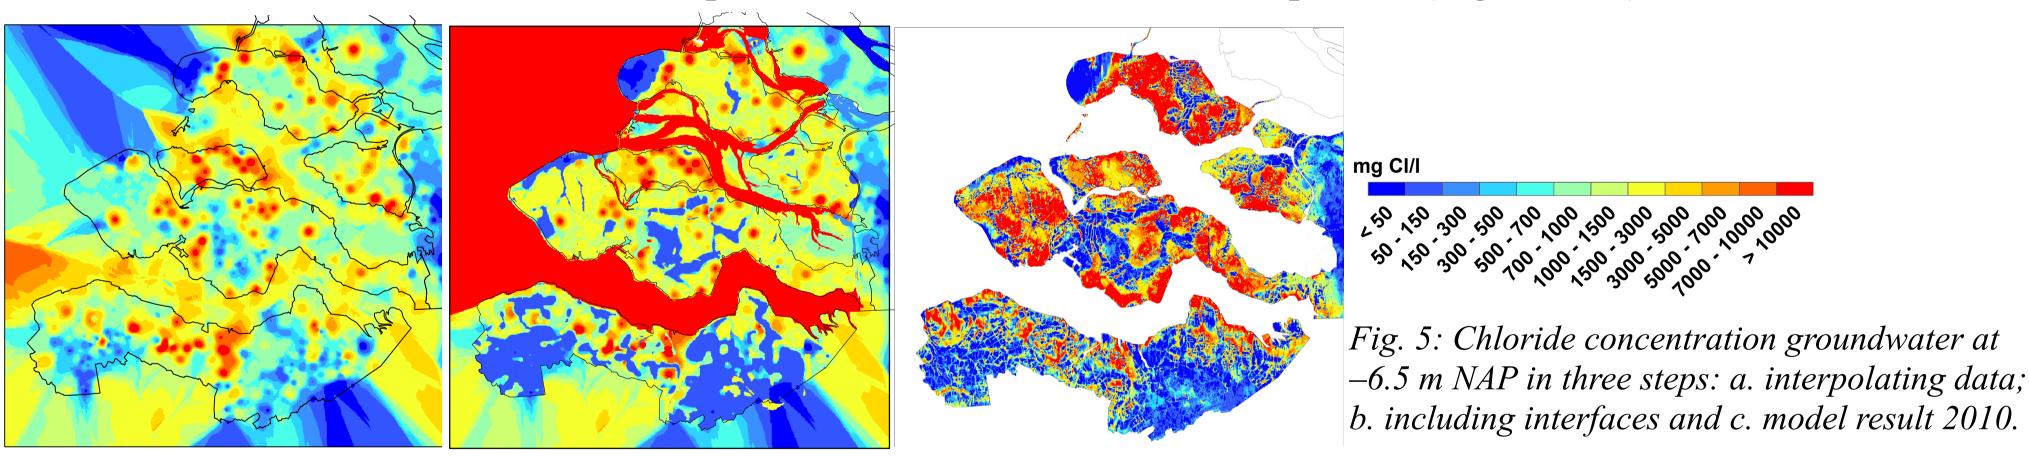

Applications of the 3D model:

- Future fresh water resources Schouwen-Duiveland (Interreg IV-B Climate Proof Areas);
- Salt load to surface water system of the island Tholen on a decade basis;
- Effects elevation level Grevelingen on groundwater system;
- Physical impacts of climate change on coastal groundwater and surface water systems (Interreg IV-B Cliwat).

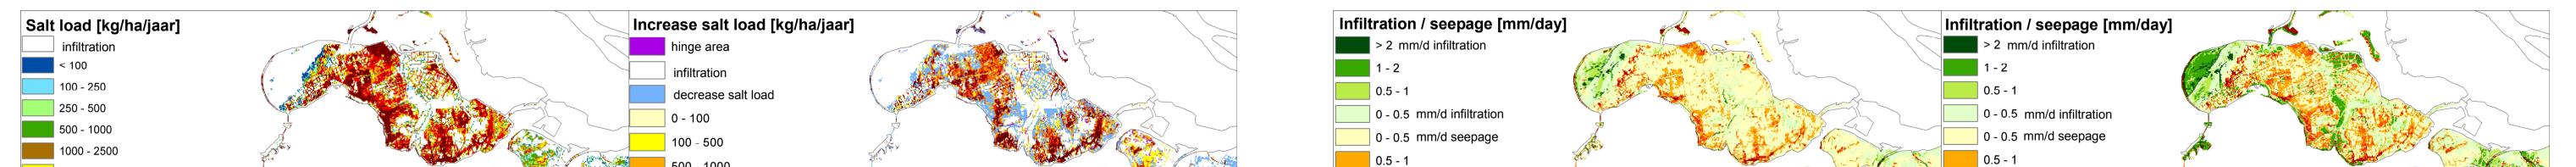

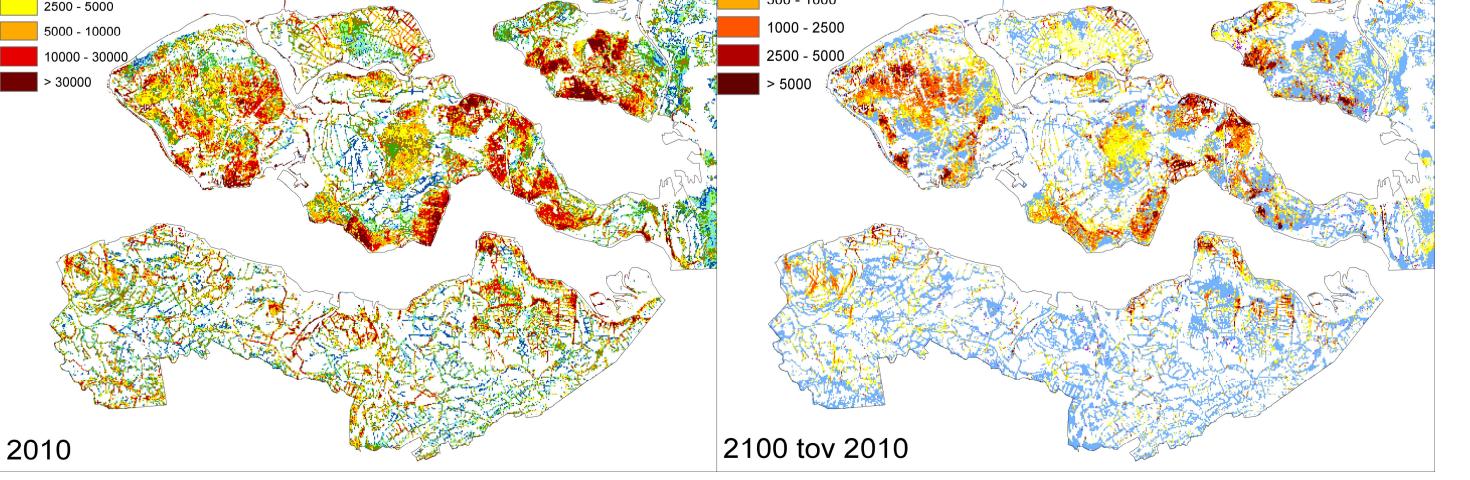


Fig. 7: salt load from the groundwater to the surface water a. yearly mean 2010 and b. 2100 compared to 2010 (without climate change).

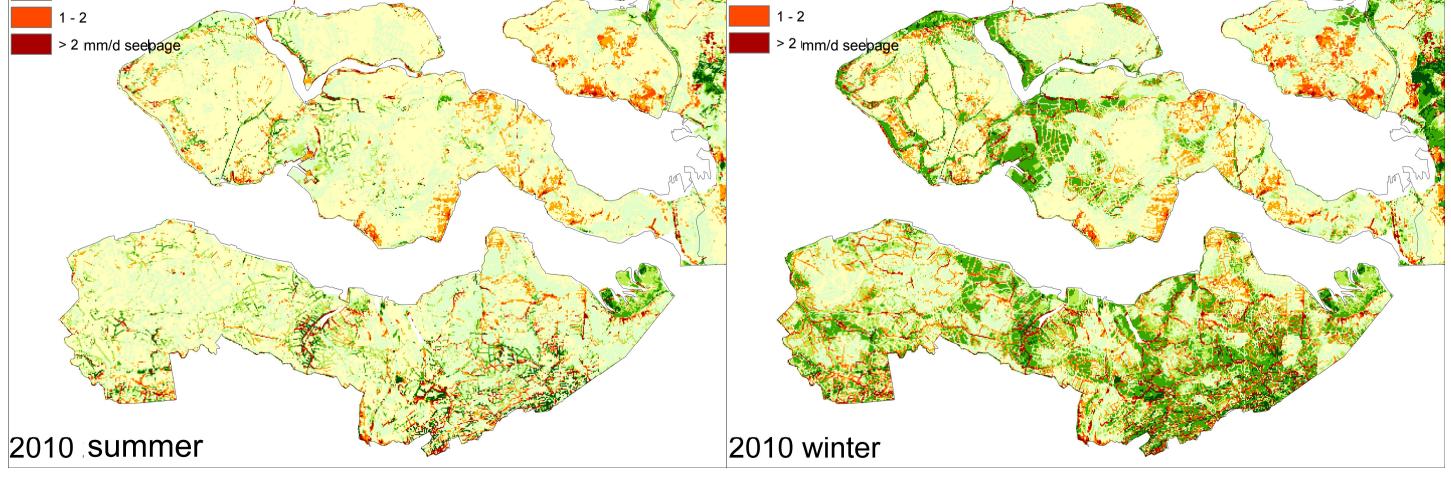


Fig. 8: seepage and infiltration [mm/day] a. summer 2010 and b. winter 2010

References:

- Goes, B.J.M., Oude Essink, G.H.P., Vernes, R.W. and Sergi, F. 2009. Estimating the depth of fresh and brackish groundwater in a predominantly saline region using geophysical and hydrological methods, Zeeland, the Netherlands, Near Surface Geophysics 401-412.
- Oude Essink, G.H.P. 1999. Simulating 3D density dependent groundwater flow: the adapted MOC3D. Proc. 15th Salt Water Intrusion Meeting, Ghent, Belgium: 69-79.
- Oude Essink, G.H.P., Louw, de, P.G.B., Stevens, S., de Veen, B., de, Prevo, C., Marconi, V. en Goes, B.J.M. 2009, Monitoring campaign in the occurrence of freshwater lenses in the Province of Zeeland, 2007-U-R0925/A, 132p.