

Rijkswaterstaat System Alerter Plugin - Alarmmodule (DEPRECATED)

Contents

- [Contents](#)
- [Introduction](#)
- [Configuration](#)
- [Logging examples](#)
- [Event action set-up](#)
 - [Event and Action configuration](#)
 - [Event Action Mappings](#)
 - [Scheduled Tasks \(fixed or template alert\)](#)
- [Follow a log message from FEWS to the Alarm module](#)
- [More information](#)

Introduction

Starting with release 2011.02, a task for the MC_SytemAlerter workflow can be configured to send an alert to the Alarmmodule, developed by Imtech for the IWP system. The alert sending has been implemented as an invocation of the Alarm module via a SOAP call (also know as a Webservice call). This page how to describe the FEWS-related part of the implementation. Currently these tasks can only be scheduled using the in the Admin interface. The uploaded XML configuration should conform to the [taskList.xsd](#) schema. For examples see below. The Alarm module alert part is defined in the referenced [mcSystemAlerter.xsd](#) schema.

Configuration

The following documents play a role in the generation of alerts.

- [ModuleConfigFiles\<secondaryValidation>.xml](#)
Contains the secondary validation rules that will generate logEventCodes that become visible in the logging when rules are exceeded. The log messages generated are defined in this file as well by means of <logEventCode>. It makes sense to choose sensible logEventCodes, for example all log messages used together with the Alarmmodule might start with "Alert.", see also the next section on this. File name is free to choose, secondaryValidation refers to the xsd that is used.
- [RegionConfigFiles\all three threshold configuration files](#). See also the wiki page on this: [09 Thresholds](#)
 - [RegionConfigFiles\Thresholds.xml](#)
Defines the level for each threshold with <levelThreshold>. These thresholds can be used to change colors and the use of Flags in the Displays
 - [RegionConfigFiles\ThresholdValueSets.xml](#)
Links timeSeriesSets to <thresholdValueSets>
 - [RegionConfigFiles\ThresholdWarningLevels.xml](#)
Can be used to define the overlays and colors used when <thresholdWarningLevels> are exceeded, both up and down..
- [DisplayConfigFiles\<scadaDisplay>.xml](#)
Defines the scada display in which alerts can be used by means of <shapeComponentBehaviourDefinition>. File name is free to choose, scadaDisplay refers to the xsd that is used.

Logging examples

The configured secondaryValidation monitors the configured timeSeriesSets and logs an exceedance in the FEWS logging tabel. Below are examples of a log file at an FSS, the same log messages as shown in the FEWS Admin Interface page (via "System Status" and "View Logs") and in the FEWS OC System Monitor as well.

Please note that these screenshots come from a test system. All alerts are created for test purposes only and do not relate to actual events.

```
2012-06-07 14:31:11,690 INFO - workflowPluginActivity.run - Started Activity 'AlarmerenBrabantsekanalen'
2012-06-07 14:31:11,893 WARN - SecondaryValidationLogUtils.logMessage - IWP.Schabbert>AW: Schabbert > 1370
2012-06-07 14:31:11,893 WARN - SecondaryValidationLogUtils.logMessage - IWP.Schabbert>AW: Schabbert > 1370
2012-06-07 14:31:11,987 WARN - SecondaryValidationLogUtils.logMessage - IWP.1501-MAP2: Sluis 1501 > MAP2
2012-06-07 14:31:11,987 WARN - SecondaryValidationLogUtils.logMessage - IWP.WVK-MAP2: VKN > MAP2
2012-06-07 14:31:12,003 INFO - workflowPluginActivity.run - Completed Activity 'AlarmerenBrabantsekanalen' complet
```

IWP.VVK-MAP2	07/06/2012 14:31 GMT	Warning	FS FSS00 NLIKMC00:000087670	VKN > MAP2	1
IWP.1501-MAP2	07/06/2012 14:31 GMT	Warning	FS FSS00 NLIKMC00:000087670	Sluis 1501 > MAP2	1
IWP.Schabbert>AW	07/06/2012 14:31 GMT	Warning	FS FSS00 NLIKMC00:000087670	Schabbert > 1370	1
IWP.Schabbert>AW	07/06/2012 14:31 GMT	Warning	FS FSS00 NLIKMC00:000087670	Schabbert > 1370	1

Logmeldingen	Bulletin Board	Server Systeem Status	Gedefinieerde taken	Draaiende taken	Synchronisatie Status	Synchronisatie Monitor	Import Status
Logniveau	Tijdstip logmelding	Type gebeurtenis	Logmelding	taskRunId			
WARN	07-06-2012 16:29:53	Application.Warn	Build type of the patch (development) should be the same as build type of Delft_FEWS.jar (sta...	none			
WARN	06-06-2012 19:31:26	IWP.VVK-MAP2	VKN > MAP2	NLIKMC00:000087226			
WARN	06-06-2012 19:31:26	IWP.1501-MAP2	Sluis 1501 > MAP2	NLIKMC00:000087226			
WARN	06-06-2012 19:31:26	IWP.Schabbert>AW	Schabbert > 1370	NLIKMC00:000087226			
WARN	06-06-2012 19:31:26	IWP.Schabbert>AW	Schabbert > 1370	NLIKMC00:000087226			
WARN	06-06-2012 19:21:23	IWP.VVK-MAP2	VKN > MAP2	NLIKMC00:000087223			

Event action set-up

These screenshots show the IWP system, where all log messages related to the Alarmmodule start with "IWP.". This commonality makes it easier to set up the Alarmmodule. In this case, an action has been configured in the Admin Interface that comes into action whenever a log messages starting with "IWP." is logged. The configuration of this action consists of three parts (see also [04 Setting Up Event-Action Configuration](#)):

1. **Workflows and FSSs >Event and Action Configuration**, see also [Event and Actions](#)
2. **Forecast Tasks > Scheduled Tasks**, see also [Scheduled Tasks - Overview](#)

Event and Action configuration

Here we set up an **Action ID** (in this example **Alarmmodule.alarm**) and link it to an <actionxml> configuration file, see the example below. In this example the logEventCode triggers a workflow with has the tag **Alarmmodule.alarm**. This action is a one off, meaning it will run only once after triggering, opposed to scheduled tasks that run at a fix schedule. Furthermore, this action can't be triggered more that once every 60 seconds. Please note that the Action ID and tag are the same. This is not required by FEWS, but makes it a lot easier for the operator to follow what's going on.

Main menu

- » System Status
- » Files
- » Forecast Tasks
- » Workflows and FSSs
 - » Workflows
 - » Workflow FSS Mappings
 - » Forecast Shell Servers
 - » Event and Action Configuration
 - » Event Action Mappings

Workflows and FSSs

Event and Action Configuration

- [Upload New Action Configuration](#)

Action ID	Default Version	Description	Creation Time	Created By	
Alarmmodule.alarm	NLIKMC00:000000001 (Default)	Stuur alarm naar Imtech alarm module	06/06/2012 17:13 GMT	ADMIN	versions

```
<?xml version="1.0" encoding="UTF-8"?>
<actionxml type="task">
  <oneoff>
    <cardinaltime interval="60" reference="2004-01-01T00:00:00.000+00:00"/>
    <tag name="Alarmmodule.alarm"/>
  </oneoff>
</actionxml>
```

Event Action Mappings

Here we link the Action ID to a logEventCode. In this example all log messages starting with IWP.* are linked to the Action ID Alarmmodule.alarm. By using the wildcard symbol *, we don't have to specify each and every single eventCode separately. All log messages starting with IWP. will trigger the action we described in the previous section.

Main menu

- » System Status
- » Files
- » Forecast Tasks
- » Workflows and FSSs
 - » Workflows
 - » Workflow FSS Mappings
 - » Forecast Shell Servers
 - » Event and Action Configuration
 - » Event Action Mappings
- » User Administration

Workflows and FSSs

Event Action Mappings

- [Create New Event Action Mapping](#)
- [Upload Multiple Event Action Mappings from File](#)

Event Code	Action Configuration ID	
IWP.*	Alarmmodule.alarm	Edit Delete

Scheduled Tasks (fixed or template alert)

Here we link the workflow MC_SystemAlerter to the Event Action by means of a Tag. This task is not added manually (through the link "**Schedule New Task**"), but is uploaded from file (through the "**Upload task(s) from file**" functionality). In the example file below, the workflow has the tag **Alarmmodule.alarm**, which is the same tag we defined in the eventAction configuration file. Thus, this workflow will be run when a log message starting with IWP.* is generated. Please note that it is essential this scheduled task has the following properties:

- Status is suspended, or `<taskStatus>S</taskStatus>`
- Tag is Alarmmodule.alarm, or `<taskTag>Alarmmodule.alarm</taskTag>`
Note: the screenshot of the Admin Interface doesn't match the example, but shows the tag ALARM_MODULE
- Interval is One-off task, or `<taskSelection><singleTask><time0>2011-08-23T09:05:00.000Z</time0></singleTask></taskSelection>`
- Configure webserviceURL of the Alarmmodule, or `<webserviceURL>http://localhost:8989/AlarmModuleManager/webservices/alarmService</webserviceURL>`
This is an example based on the IWP system. The webservice of the `<alarmModuleAlert>` is the URL of the webservice of the alarm module that has been set-up according to the specifications of Imtech.
- Alert message is configured as part of the task properties of the scheduled MC_SystemAlerter task, this can be either a
 - Fixed alert message, or `<alarmDiagLine code="IWP_0_TEST" description="Test Alert from FEWS" source="MC01" level="1"/>`, or a
 - Template alert message, or `<alarmDiagTemplateLine code="%EVENT_CODE%" description="%LOG%" source="%MC_ID%" level="1"/>`, in which
 - %LOG% will be replaced by the message part of log entry that triggered the Event Action
 - %EVENT_CODE% will be replaced by the event code of the log entry that triggered the Event Action
 - %MC_ID% will be replaced by the MasterController ID creating the log entry that triggered the Event Action

Main menu

- » System Status
- » Files
- » Forecast Tasks
 - » Scheduled Tasks
 - » Running Tasks
- » Workflows and FSSs
- » User Administration
- » System Control

Running on NLIKMC00

Logged on as ADMIN

» Log Off

Forecast Tasks

Scheduled Tasks

- [Schedule New Task](#)
- [Upload Task\(s\) from File](#)
- [Download All Scheduled Tasks](#)

Refresh

Task ID	Description	Workflow ID	What-if Scenario	Tag	Remote MC ID	Priority	Interval	Next Due Time	Task Status
NLIKMC00.0000021	Import van MATROOS data	Import_MATROOS_Data	None			Normal	6 hours	07/06/2012 17:00 GMT	Pending
NLIKMC00.0000011	Twentekanalen verwachtingen	Twentekanalen_Verwachting	None			Normal	6 hours		Suspended
NLIKMC00.0000009	IWP_0_Alarm	MC_SystemAlerter	None	ALARM_MODULE		Normal	One-off task		Suspended

```

<?xml version="1.0" encoding="UTF-8"?>
<taskList
  xsi:schemaLocation="http://www.wldelft.nl/fews http://fews.wldelft.nl/schemas/version1.0/taskList.xsd"
  xmlns="http://www.wldelft.nl/fews" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <task>
    <taskStatus>S</taskStatus>
    <taskTag>Alarmmodule.alarm</taskTag>
    <runOnFailOver>>false</runOnFailOver>
    <taskProperties>
      <description>IWP_0_Alarm</description>
      <workflowId>MC_SystemAlerter</workflowId>
      <taskSelection>
        <singleTask>
          <time0>2011-08-23T09:05:00.000Z</time0>
        </singleTask>
      </taskSelection>
      <forecastPriority>Normal</forecastPriority>
      <makeForecastCurrent>>false</makeForecastCurrent>
      <makeStateCurrent>>false</makeStateCurrent>
      <mcSystemAlerter>
        <alerts>
          <alarmModuleAlert>
            <webserviceURL>http://localhost:8989/AlarmModuleManager
/webServices/alarmService</webserviceURL>
            <alarmDiagLine code="IWP_0_TEST" description="Test Alert from
FEWS" source="MC01" level="1"/>
            <!-- <alarmDiagTemplateLine code="%EVENT_CODE%" description="%
LOG%" source="%MC_ID%" level="1"/> -->
          </alarmModuleAlert>
        </alerts>
      </mcSystemAlerter>
    </taskProperties>
  </task>
</taskList>

```

Follow a log message from FEWS to the Alarm module

The logging of the Admin Interface shows us what the FEWS Server does, when detecting a logEventCode starting with "IWP.*" After the log message is generated on a FSS and stored in the Central DataBase they become visible in the Admin Interface (see Figure 1). The log message with Code "MC_EVENT_PROCESSOR.." tells us 4 new log entries have been detected. Next, the log message with code "MC_Alerter.." indicates the alarm module has been contacted. When you click on the message in the Text column, it brings you to a separate page with more logging information (see Figure 2). Here we see that 3 messages have been sent to the Alarm module correctly, but 1 message has been sent twice. To check whether alert messages are sent through correctly in the Alarm module, we open the Alarm Module GUI in a browser. After logging in, we see an overview display showing the date-time of all alert messages (see Figure 3). We see the same log messages we saw previously in the Admin Interface and FEWS OC System Monitor. This means the messages are sent through to the Alarm module correctly. It depends on the configuration of the Alarm module which messages are displayed. In this example we'll look at the alarm code for **Schabbert**. In FEWS this log message is generated "IWP.Schabbert>AW". In the Alarm module GUI the following Alarm Definition is defined (see Figure 4). This alarm is linked to groups of people, who will receive the alarm message. The members of each group can be configured in the Alarm module as well.

Please note that these screenshots come from a test system. All alerts are created for test purposes only and do not relate to actual events.

Main menu » System Status » Live System Status » Active Services » View Logs » Log Manager » Collect System LogFiles » Files » Forecast Tasks » Workflows and FSSs » User Administration » System Control Running on NLIKMC00 Logged on as ADMIN » Log Off	System Status View Logs • Download logs Entry date from <input type="text"/> Level <input type="text"/> Debug Code <input type="text"/> Entry date to <input type="text"/> Source <input type="text"/> Text <input type="text"/> <input type="button" value="Reset"/> <input type="button" value="Filter"/> Entries per page <input type="text" value="100"/> Total number of entries 28773					
	<< < Refresh > >>					
	Code	Entry Time	Level	Source	Text	Type
SYNCHTASKRUN Complete	07/06/2012 14:31 GMT	Debug	FS *synch NLIKMC00.000087673	Completed data management task with exit code 0	0	
MC_Alerter_AlarmModule.Warning	07/06/2012 14:31 GMT	Warning	FS *synch NLIKMC00.000087673	Sent AlarmRequest to AlarmModule webservice URL	0	
SYNCHTASKRUN Exec	07/06/2012 14:31 GMT	Debug	FS *synch NLIKMC00.000087673	Running data management task. WorkflowId=MC_Sy...	0	
MC_EVENT_PROCESSOR.EVENT_PROCESSED	07/06/2012 14:31 GMT	Debug	MC NLIKMC00: TM LogProcessor	The following 4 log entries were processed suc...	0	

Figure 1:

Figure 2:

```

http://nlkmc00/viewLogEntry.do?ac...

Sent AlarmRequest to AlarmModule webservice URL http://.../AlarmModuleManager/webservices/alarmService
*****
Response from alarmModule for code 'IWP.Schabbert>AW': ok
*****
Response from alarmModule for code 'IWP.Schabbert>AW': warning : alarm event code is already in list of alarms
*****
Response from alarmModule for code 'IWP.1501-MAP2': ok
*****
Response from alarmModule for code 'IWP.WVK-MAP2': ok

```

Figure 3:

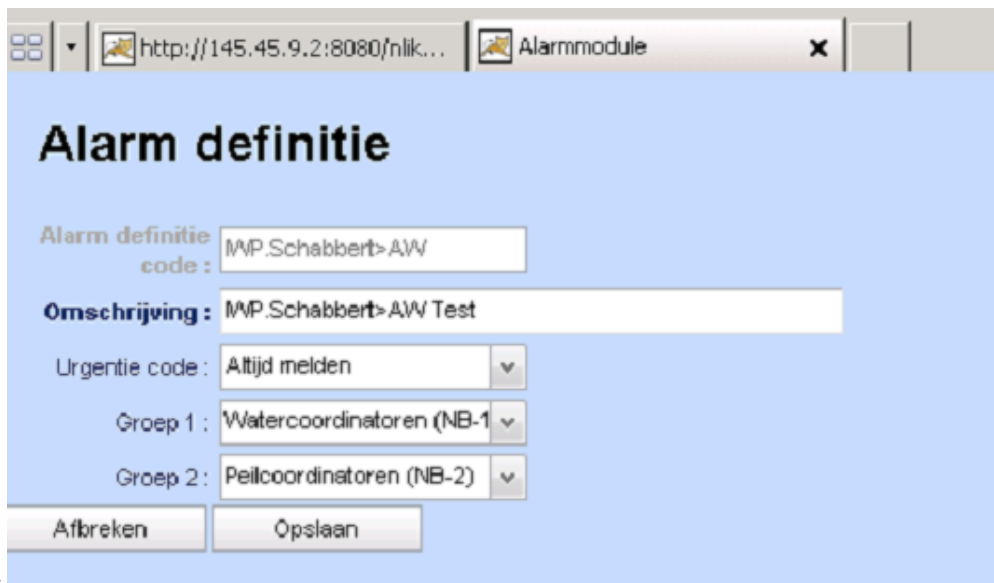
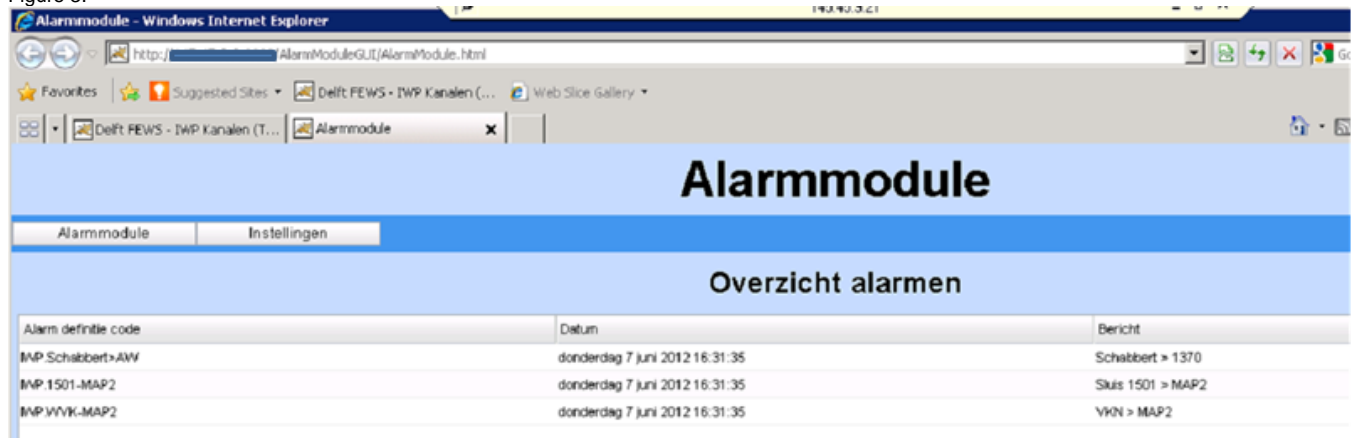


Figure 4:

More information

For more information the reader is referred to the manual of the Alarm module itself, or to the creators of the module at Imtech.