OpenEarth developer in five easy steps

OpenEarth.nl - OpenEarth.eu:	Home	Data	Products	Tools&tutorials	Forum	Search	Join@LinkedIn

Contents

- 1 Request your username and password first
- 2 Follow this five step guideline to making your first contribution
- 3 Other things you must know




Acknowledgements

 This TortoiseSVN Installation Protocol is developed by the Data and Knowledge Management section of the Building with Nature programme as a Deliverable of Workpackage DM 1.1

Request your username and password first

To join the OpenEarth community request a free username and password by signing up at http://oss.deltares.nl (link in upper right corner). You only need a valid email address..

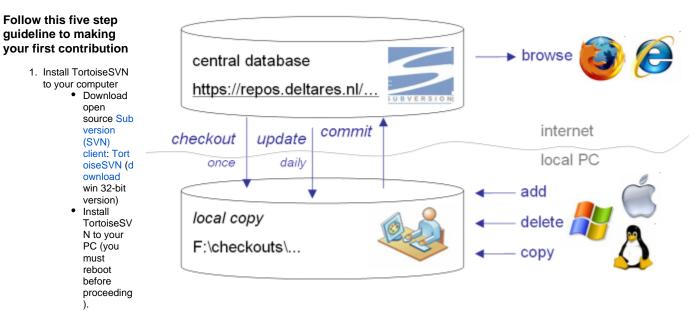

- Create local folder
 - on your PC for (all) your repository checkouts
 - Create a source code checkout directory on your PC (OpenEarthTools source code requires app. 300 MB of disk space). For instance :
 - F:\checkouts\OpenEarthTools\
 - In any file explorer (Total Commander recommended) right-click (hold for 1 second) and select SVNCheckout
 - Enter the url of the (OpenEarth) repository you want to use. You can find the url you want by browsing the repository with a regular webbrowser, and copying the url from the address bar. e.g.
 - https://svn.oss.deltares.nl/repos/openearthtools/trunk/
 - For checkout-depth choose 'fully recursive' for OpenEarthTools (not for OpenEarthRawData unless you have tens of Gb free).
 - By default only XBeach is added as external, so you can leave this box unticked.
 - Choose HEAD revision (this is the main OpenEarthTools trunk that is continuously being improved, so please stay updated.)
- 3. Enter your subversion username and password
 - Deltares users can use their Deltares login (ask the OpenEarth or McTools developers team to be added to the user list, see above).
 - External users can mail the OpenEarth developers team with a request for external username and password, see #Request your username and password first



If you use total commander, enable "Show overlay icons" in options to see which files were changed.



If you get a question asking for the acceptance of SSL certificates select 'accept permanently'



In some companies/institutes your PC may be behind a proxy server. In this case tick 'Enable Proxy Server' under *Settings /Network* in SubVersion and add the correct proxy Server address (ask your network administrator).

- 4. Perform an SVN update regularly to benefit from updates by co-developers.
 - Right-mouse click on the root directory of your check-out, and choose 'SVN Update' (Figure 1).
 - There is a separate tutorial for dealing with Subversion
- 5. Commit your updates to the repository regularly.
 - Right-mouse click on the root directory of your check-out, and choose 'SVN commit ...' (Figure 1).
 - Do not commit all your updates at once. Commit only one coherent subset at a time, and provide a concise one-line description, to make clear to co-developers what you did. You can see where commits are required where the file/dir icons display a red !-mark (as McTools directory in Figure 1), rather then a green v-mark (as OpenEarthData directory in Figure 1). Note: these handy icons only show up after enabling "Show overlay icons", see above.
 - Do not commit functions that are partly finished, only commit working stuff, because OpenEarthTools should always consists of working stuff.
 - Right-mouse click on the root directory of your check-out, and choose 'TortoiseSVN >' (Figure 1) and then choose from the sub-menu.

Figure 1: After installing TortoiseSVN this menu pops up when clicking your right-mouse button.

- For the Matlab toolbox run openearthtools/matlab/oetsettings.m every time you start Matlab. This will add relevant paths to your matlab path (excl. all hidden directories, and incl. a java path).
- For the Python toolbox run python setup.py develop in the OpenEarthTools.

Other things you must know

- OpenEarth guidelines:
 - o matlab coding style



Adding/removing/deleting complete files or directories needs to be done via SVN and NOT via your file browser as TotalCommander.



For Deltares users: as a developer do not use the read-only work-copy on p:\mctools to make changes. Only use your own local checkout, and fix all tiny bugs when you encounter them.