

05 General Adapter Module

04 Export modules

05 Configuring the available Delft-FEWS modules

06 Lookup Table Module

Several variables are available to be use

What	<i>nameofinstance.xml</i>
Description	Configuration for the general adapter module
schema location	http://fews.wldelft.nl/schemas/version1.0/generalAdapterRun.xsd
Entry in ModuleDescriptors	<pre><moduleDescriptor id="GeneralAdapter"> <description>General Adaptor to launch published interface compliant modules< /description> <className>nl.wldelft.fews.system.plugin.generaladapter.GeneralAdapter</className> </moduleDescriptor></pre>

- General Adapter Configuration
 - general
 - burnInProfile
 - activities
 - General settings
 - description
 - piVersion
 - rootDir
 - workDir
 - exportDir
 - exportDataSetDir
 - updateExportDataSetDirOnlyOnChange
 - purgeExportDataSetDirOnUpdate
 - exportIdMap
 - exportUnitConversionsId
 - importDir
 - importIdMap
 - importUnitConversionsId
 - dumpFileDir
 - dumpDir
 - diagnosticFile
 - missVal
 - convertDatum
 - timeZone
 - timeZoneOffset
 - timeZoneName
 - timeOFormat
 - startDateTimeFormat
 - endDateTimeFormat
 - dateTimeFormat
 - ensembleMemberCount
 - modelTimeStep
 - Burn-In Profile
 - length
 - timeSeries
 - Startup Activities
 - purgeActivity
 - filter
 - unzipActivity
 - zipActivity
 - Export Activities
 - exportStateActivity
 - description
 - moduleInstancelId
 - ensembleId
 - ensembleMemberIdSubstringPattern
 - stateExportDir
 - stateConfigFile
 - stateLocations
 - stateSelection
 - overrulingColdStateModuleInstancelId
 - adjustTimeSeriesStartTime

- loopTimeStep
- writeIntermediateState
- minimumRunLength
- Configuration example
- exportTimeSeriesActivity
 - description
 - exportFile
 - exportBinFile
 - ignoreRunPeriod
 - includeThresholds
 - timeSeriesSets
 - timeSeriesSets: timeSerieSet
 - omitMissingValues
 - checkMissingValues
 - omitEmptyTimeSeries
 - forecastSelectionPeriod
 - ignoreNonExistingLocationSets
- exportMapStacksActivity
 - description
 - exportFile
 - gridFile
 - locationId
 - gridName
 - gridFormat
 - timeSerieSet
- exportProfilesActivity
- exportDataSetActivity
 - description
 - moduleInstanceld
- exportParameterActivity
 - description
 - moduleInstanceld
 - fileName
 - templateLocationLooping
- exportTableActivity
 - description
 - exportFile
 - tableType
 - operation
 - parameters
 - locationId/locationSetId
- exportNetcdfActivity
 - description
 - exportFile
 - timeSeriesSets
 - omitMissingValues
 - omitEmptyTimeSeries
 - ignoreNonExistingLocationSets
- exportRunFileActivity
 - description
 - exportFile
 - properties
- exportNetcdfRunFileActivity (since stable build 2014.01)
 - description
 - exportFile
 - properties
 - Configuration example
 - Example of an exported netcdf run file (converted to text format):
- exportCustomFormatRunFileActivity
 - description
 - templateFile
 - exportFile
 - locationId
 - fixedWidth
 - numberOfDecimals
 - configuration example
- exportAreaSelectionActivity (currently NGMS only)
 - description
 - exportFile
 - gridLocationId
 - gridFormat
- exportLocationAreaActivity (currently NGMS only)
 - description
 - exportFile
 - gridLocationId
 - gridFormat
 - polygonLocationId
- exportRatingCurveActivity
 - description

- exportFile
 - linearTableStageResolution
 - locationId
 - locationSetId
- Execute Activities
 - executeActivity
 - description
 - command
 - arguments
 - environmentVariables
 - logFile (since stable build 2014.01)
 - timeOut
 - maxNumberOfSimultaneousRuns
 - waitForOtherRun
 - overrulingDiagnosticFile
 - ignoreDiagnostics
 - ignoreExitCode
- Internal GA variables
- Import Activities
 - exportPlaceholderFile
 - description
 - importStateActivity
 - importTimeSeriesActivity
 - importMapStacksActivity
 - importNetcdfActivity
 - Combined with workflow ensemble loop
 - importPiNetcdfActivity
 - importProfilesActivity
 - importShapeFileActivity
 - importCsvModuleRunTablesActivity (since 2015.01)
- Shutdown Activities

General Adapter Configuration

A key feature of Delft-FEWS is its ability to run external modules to provide essential forecasting functionality. These modules may be developed by Deltares as well as by other companies or institutions. The Delft-FEWS system does not have any knowledge of the specific implementation of these modules. It is rather the central philosophy to have an open system, that is able to treat external modules as plug-ins that can be used if needed.

The General Adapter is the part of the Delft-FEWS system that implements this feature. It is responsible for the data exchange with the modules and for executing the modules and their adapters. The central philosophy of the General Adapter is that it knows as little as possible of module specific details. Module specific intelligence is strictly separated from the Delft-FEWS system. In this way an open system can be guaranteed. Module specific intelligence required by the module to run is vested in the module adapters.

Communication between the General Adapter and a module is established through the published interface (PI). The PI is an XML based data interchange format. The General Adapter is configured to provide the data required for a module to run in the PI format. A module adapter is then used to translate the data from the PI to the module native format. Vice versa, results will first be exported to the PI format by a module adapter before the General Adapter imports them back into Delft-FEWS.

Grid and scalar timeseries can also be exchanged using netCDF format.

This exchange format is intended for the modules that obtain their input from netCDF files and/or write their output to netCDF files.

The General Adapter module can be configured to carry out a sequence of five types of tasks;

- Startup Activities. These activities are run prior to a module run and any export import of data. The activities defined are generally used to remove files from previous runs that may implicate the current run.
- Export Activities. These activities define all items to be exported through the published interface XML formats to the external module, prior to the module or the module adapters being initialised. Grid and scalar timeseries can be exported also in netCDF format.
- Execute Activities. These execute activities define the external executables or Java classes to be run. Tracking of diagnostics from these external activities is included in this section.
- Import Activities: These activities define all items to be imported following successful completion of the module run.
- Shutdown Activities. These activities are run following completion of all other activities. The activities defined are generally used to remove files no longer required.

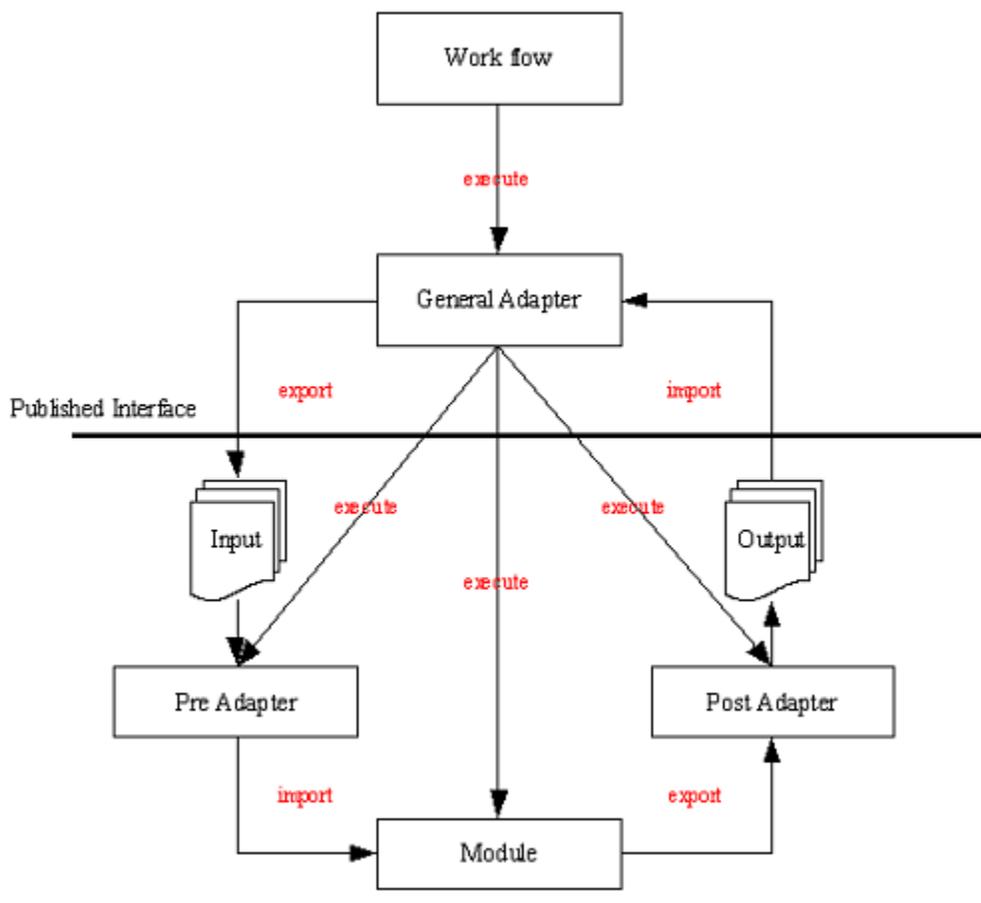


Figure 65 Schematic interaction between the General Adapter and an external module

When available as configuration on the file system, the name of the XML file for configuring an instance of the general adapter module called for example HBV_Maas_Forecast may be:

HBV_Maas_Forecast 1.00 default.xml

HBV_Maas_Forecast	File name for the HBV_Maas_Forecast configuration.
1.00	Version number
default	Flag to indicate the version is the default configuration (otherwise omitted).

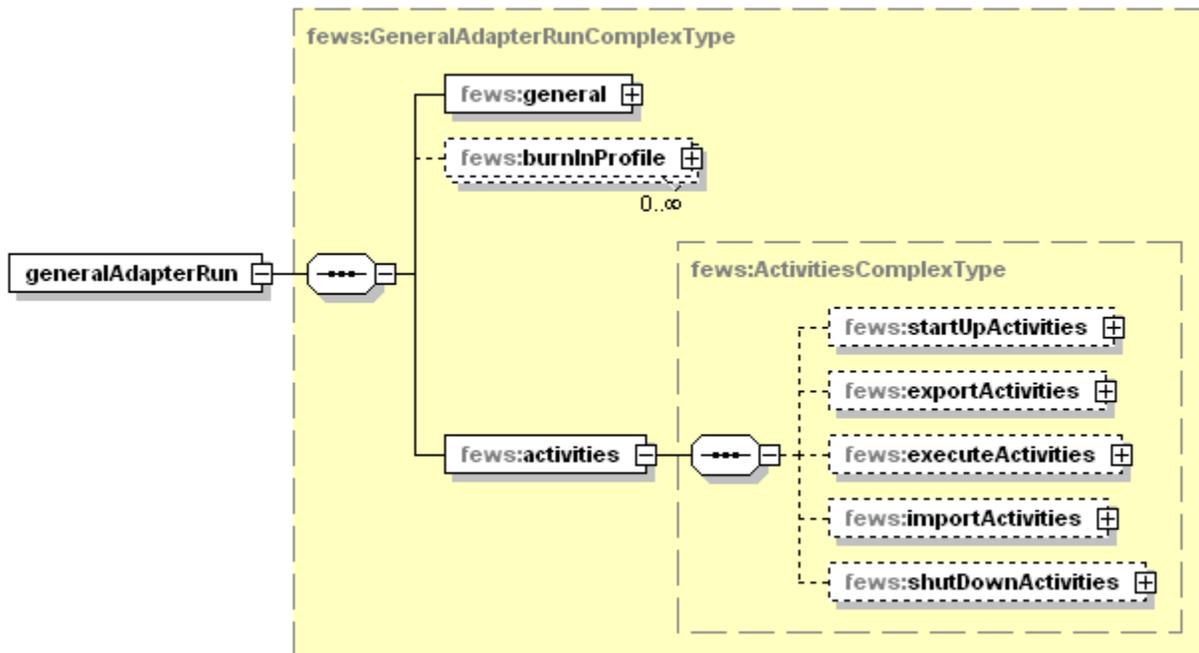


Figure 66 Elements of the General Adapter configuration

general

Root element of general settings.

burnInProfile

Burn-in period and initial value for cold state starts.

activities

Root element for the activities to be defined. The activities are defined in a fixed order;

- startUpActivities
- exportActivities
- executeActivities
- importActivities
- shutDownActivities

General settings

GeneralComplexType

fews:description

Optional description of the General Adapter run.

fews:piVersion

Version of the PI specification that is supported by the pre and post adapter

fews:rootDir

Root directory of the module instance. This may be either a relative or absolute path.

fews:workDir

Working directory for several activities.

fews:exportDir

Directory to which the General Adapter will export data.

fews:exportDataSetDir

Directory to which the General Adapter will export data sets.

fews:exportIdMap

Id of a file that contains mapping from internal to external location and parameter ID's.

fews:exportUnitConversionsId

Id of UnitConversions to be used for export unit mapping

fews:importDir

Directory the General Adapter will import data from.

fews:importIdMap

Id of a file that contains mapping from external to internal location and parameter ID's.

fews:importUnitConversionsId

Id of UnitConversions to be used for import unit mapping

fews:dumpFileDir

Directory of the dump file.

fews:dumpDir

1..∞

List of directories that the General Adapter will dump in case of a module failure. The binary dump will include all sub directories.

fews:diagnosticFile

File containing diagnostic information about the module instance run. This file always is located in the importDir.

fews:missVal

Missing value definition for this TimeSeries. Defaults to NaN if not defined.

fews:convertDatum

Convert datum from Ordnance level during Import.
Convert datum to Ordnance level during Export.

fews:timeZone	Import data is converted from this timezone to GMT. Export data is converted from GMT to this timezone.
fews:time0Format	The date time format of the %TIME0% variable. This date time format is only used if there is no date time format specified in the arguments for the variable. yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute.
fews:startDateTimeFormat	The date time format of the %START_DATE_TIME% variable. This date time format is only used if there is no date time format specified in the arguments for the variable. yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute. The %START_DATE_TIME% variable only works in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02).
fews:endDateTimeFormat	The date time format of the %END_DATE_TIME% variable. This date time format is only used if there is no date time format specified in the arguments for the variable. yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute. The %END_DATE_TIME% variable only works in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02).
fews:dateTimeFormat	0..∞ Since stable build 2015.01, Definitions of date time formats that can be used as arguments for the %TIME0%, %START_DATE_TIME% and %END_DATE_TIME% variables, e.g.: %START_DATE_TIME(idOfADateFormat)% %END_DATE_TIME(idOfAnotherDateFormat)%. Date time formats specified as arguments overrule the startDateTimeFormat and endDateTimeFormat specified above. The %START_DATE_TIME% and %END_DATE_TIME% variables only work in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02).
fews:ensembleMemberCount	OBSOLETE SINCE 2009.01. Specify the member range in the workflow.
fews:modelTimeStep	The model time step adjusts the end time when necessary of the run period for this model and for all models/modules that will run after this model in the same task run

Figure 67 Elements of the general section of the general adapter configuration

description

Optional description of the configuration. Used for reference purposes only.

piVersion

Version of the PI specification that is supported by the pre and post adapter.

The general section requires several directories to be defined. To allow efficient definition of these, tags specific to the General Adapter may be used.

%REGION_HOME% Root directory of the DELFT-FEWS configuration

%ROOT_DIR% Directory specified in the rootDir element.

%WORK_DIR% Directory specified in the workDir element.

The REGION_HOME directory should be used when possible to avoid absolute path names.

rootDir

Root directory for the external module. Other directories can be defined relative to this rootDir using predefined tags (see comment box below).

workDir

Working directory to be used by the external module. When started this directory will be the current directory.

exportDir

Directory to export data from Delft-FEWS to the external module. All Published Interface files will be written to this directory (unless overruled in naming the specific export files).

exportDataSetDir

Directory to export module datasets from Delft-FEWS to the external module. A module dataset is a ZIP file, which will be unzipped using this directory as the root directory. If the zip file contains full path information, this will be included as a tree of subdirectories under this directory.

updateExportDataSetDirOnlyOnChange

If set to 'true' datasets are only updated when they have changed. Change is detected by comparing the timestamp in the dataset info file with the modification time of the dataset configuration file. By default this value is 'false' and datasets are always updated.

purgeExportDataSetDirOnUpdate

If a dataset has been detected as updated then this option allows user to purge content of existing moduledataset directory before new moduledataset is exported. By default the value is 'false' and all existing dataset content is overwritten.

exportIdMap

ID of the IdMap used to convert internal parameterId's and locationId's to external parameter and location Id's. See section on configuration for Mapping Id's units and flags.

exportUnitConversionsId

Id of UnitConversions to be used for export unit mapping

importDir

Directory to import result data from the external module to Delft-FEWS. All Published Interface files will be read from this directory (unless overruled in naming the specific export files).

importIdMap

ID of the IdMap used to convert external parameterId's and locationId's to internal parameter and location Id's. This may be defined to be the same as the import directory, but may also contain different mappings. See section on configuration for Mapping Id's units and flags.

importUnitConversionsId

Id of UnitConversions to be used for import unit mapping

dumpFileDir

Directory for writing dump files to. Dump Files are created when one of the execute activities fails. A dump file is a ZIP file which includes all the dumpDir directories defined. The dump file is created immediately on failure, meaning that all data and files are available as they are at the time of failure and can be used for analysis purposes. The ZIP file name is time stamped to indicate when it was created.

dumpDir

Directory to be included in the dump file. All contents of the directory will be zipped. Multiple dumpDir's may be defined.

NOTE: ensure that the dumpDir does not include the dumpFileDir. This creates a circular reference and may result in corrupted ZIP files.

diagnosticFile

File name and path of diagnostic files created in running modules. This file should be formatted using the Published Interface diagnostics file specification.

missVal

Optional specification of missing value identifier to be used in PI-XML exported to modules and imported from modules.

NOTE: it is assumed an external module uses the same missing value identification for both import and export data.

convertDatum

Optional Boolean flag to indicate level data is used and produced by the module at a global rather than a local datum. The convention in Delft-FEWS is that data is stored at a local datum. If set to true data in parameter groups supporting datum conversion will be converted on export to the global datum by adding the z coordinate of the location. (see definition of parameters and locations in Regional Configuration).

timeZone

Time zone with reference to UTC (equivalent to GMT) for all time dependent data communicated with the module. If not defined, UTC+0 (GMT) will be used. This time zone is used when importing pi files and the time zone is not available in the pi file.

timeZoneOffset

The offset of the time zone with reference to UTC (equivalent to GMT). Entries should define the number of hours (or fraction of hours) offset. (e.g. +01:00). This time zone is used when importing pi files and the time zone is not available in the pi file.

timeZoneName

Enumeration of supported time zones. See appendix B for list of supported time zones. This time zone is used when importing pi files and the time zone is not available in the pi file.

time0Format

The date time format of the %TIME0% variable and the %CURRENT_TIME% variable. This date time format is only used if there is no date time format specified in the arguments for the variable. yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute.

startDateTimeFormat

The date time format of the %START_DATE_TIME% variable. This date time format is only used if there is no date time format specified in the arguments for the variable. yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute. The %START_DATE_TIME% variable only works in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02).

endDateTimeFormat

The date time format of the %END_DATE_TIME% variable. This date time format is only used if there is no date time format specified in the arguments for the variable. yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute. The %END_DATE_TIME% variable only works in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02).

dateTimeFormat

Since stable build 2015.01. Definitions of date time formats that can be used as arguments for the %TIME0%, %START_DATE_TIME% and %END_DATE_TIME% variables. e.g.: %START_DATE_TIME(idOfADateFormat)% %END_DATE_TIME(idOfAnotherDateFormat)%. Date time formats specified as arguments override the startDateTimeFormat and endDateTimeFormat specified above. The %START_DATE_TIME% and %END_DATE_TIME% variables only work in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02).

- **id:** Identifier for this date time format. Use this identifier to refer to this date time format in the argument of a variable.
- **dateTimePattern:** Pattern for this date time format. This can be e.g. "yyyy-MM-dd HH:mm:ss". yyyy = Year, MM = Month in year, dd = Day in month, HH = Hour in day (0-23), mm = Minute in hour, ss = Second in minute.

ensembleMemberCount

Defines if ensembles are read from or written to a number of sub directories.

modelTimeStep

The model time step adjusts the end time when necessary of the run period for this model and for all models/modules that will run after this model in the same task run.

Burn-In Profile

Burn-in profile for cold state starts. Used to replace first part of a timeseries.

For time series with matching parameter-location ids, the first value is replaced by the initialValue. Element length defines the length of timeseries beginning that is to be replaced using linear interpolation.

```
<burnInProfile>
  <length multiplier="4" unit="hour"/>
  <timeSeries>
    <parameterId>H.obs</parameterId>
    <locationSetId>locationInitialValueAttSet</locationSetId>
    <initialValueAttributeId>initialValue</initialValueAttributeId>
  </timeSeries>
</burnInProfile>
```

length

Length of time series beginning that is to be replaced.

timeSeries

parameterId and locationId or locationSetId => to match timeSeries this burn in profile should apply to

initialValue or initialValueAttributeId => to specify the start value hardcoded or via a location attribute

Startup Activities

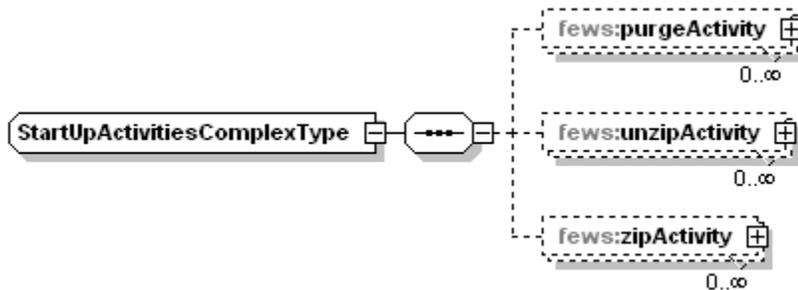


Figure 68 Elements of the startUpActivities section of the General Adapter configuration.

purgeActivity

Root element of a purge activity used to delete files from previous runs. Multiple purge activities may be defined.

filter

Filter specifying files to be removed. Wildcards may be used.

Deleting a whole directory can be achieved by defining the directory path in the filter without any file filter options (.).
eg: %ROOT_DIR%/exportDir/purgeDirectory

Sub directories will not be removed. If the configured directory contains subdirectories it can not be removed, this will result in an error that is logged: "GA. Error: Can not delete an existing directory "

A directory can only be removed if it is a sub directory of the General Adapter root directory!

Example (not the use of tags to define the directory names):

```
<startUpActivities>
  <purgeActivity>
    <filter>%ROOT_DIR%/logs/*. *</filter>
  </purgeActivity>
  <purgeActivity>
    <filter>%ROOT_DIR%/data/xml/*. *</filter>
  </purgeActivity>
  <purgeActivity>
    <filter>%ROOT_DIR%/data/native/*. *</filter>
  </purgeActivity>
</startUpActivities>
```

unzipActivity

Root element of an unzip activity used to unpack a zip file and put the contained files in the directory of choice. Multiple unzip activities may be defined.

Each activity has the following elements:

- description - optional description of the activity (for documentation only)
- sourceZipFile - the name of the zip file to be unzipped
- destinationDir - the name of the directory where the files will be put

zipActivity

Root element of a zip activity used to pack all files and subdirectories of an indicated directory to a zip file for later use/inspection. Multiple zip activities may be defined. The file name may include environment variables, as well as tags defined in the general adapter or on the global.properties. See the environment variables section for a list of internal variables.

Each activity has the following elements:

- description - optional description of the activity (for documentation only)
- sourceDir - the name of the directory containing the files to be zipped
- destinationZipFile - the name of the zip file to be created

Example:

```
<startupActivities>
  <unzipActivity>
    <sourceZipFile>extra_files.zip</sourceZipFile>
    <destinationDir>%ROOT_DIR%/work</destinationDir>
  </unzipActivity>
</startupActivities>
...
<shutdownActivities>
  <zipActivity>
    <sourceDir>%ROOT_DIR%/work</sourceDir>
    <destinationZipFile>%ROOT_DIR%/inspection/%CURRENT_TIME%_%TIME0%_saved.zip</destinationZipFile>
  </zipActivity>
</shutdownActivities>
```

Export Activities

ExportActivitiesComplexType

fews:exportStateActivity 
0..∞

Exports a module instance state.

fews:exportTimeSeriesActivity 
0..∞

Exports time series.

fews:exportDataSetActivity 
0..∞

Exports a data set. Triggers export of data set for active module instance. Since 2013.01 it is possible to export multiple data sets

fews:exportMapStacksActivity 
0..∞

Exports map stacks.

fews:exportProfilesActivity 
0..∞

Exports longitudinal profiles.

fews:exportCustomFormatTimeSeriesActivity 
0..∞

Exports time series using a dedicated custom time series serializer.

fews:exportRatingCurveActivity 
0..∞

Exports rating curve for the configured locations.

fews:exportParameterActivity 
0..∞

Exports a module parameter set. Triggers export of parameter set for active module instance.

fews:exportTableActivity 
0..∞

Exports a rating curve or other table for one or more locations

fews:exportNetcdfActivity 
0..∞


Exports scalar, grid or 1d/2d spectra time series to a NetCDF file. All time series specified inside one exportNetcdfActivity must have the same value type (grid, scalar, 1d spectra or 2d spectra). For this export it is required that all ensembles have exactly the same ensemble member indices. The usage of ensemble member id's (strings) is not supported yet.

fews:exportRunFileActivity 
0..∞

Exports a run file. The run file contains general information about the run executed by the general adapter that is used by the pre and post adapter.

fews:exportNetcdfRunFileActivity 
0..∞

Exports a run file in netcdf format. The netcdf run file contains general information about the run executed by the general adapter that can be used by the pre

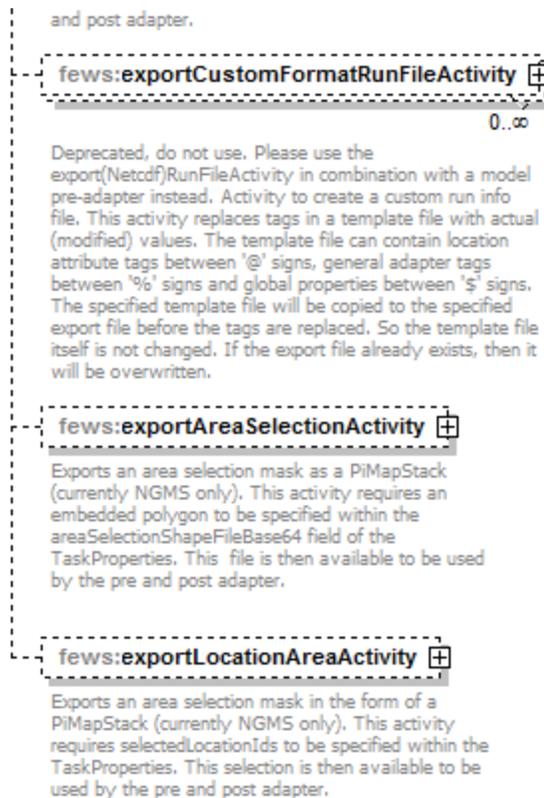

Generated by XMLSpy

www.altova.com

Figure 69 Elements of the ExportActivity section

Export activities are defined to allow exporting various data objects from Delft-FEWS to the external modules. The list of objects that can be exported (see figure above) includes;

- *exportStateActivity* to export module states
- *exportTimeSeriesActivity* to export time series for scalar or polygon time series
- *exportDataSetActivity* to export module datasets
- *exportMapStacksActivity* to export time series for grid time series
- *exportProfilesActivity* to export time series for longitudinal profile time series
- *exportCustomFormatTimeSeriesActivity* to export time series in a custom format using a third party serializer
- *exportRatingCurveActivity* to export rating curves
- *exportParameterActivity* to export module parameters
- *exportTableActivity* to export table (e.g. rating table)
- *exportNetcdfActivity* to export scalar or grid time series in Netcdf format
- *exportRunFileActivity* to export a run file (The run file contains general information that is used by the pre and post adapter)
- *exportNetcdfRunFileActivity* to export a netcdf run file (The netcdf run file contains general information that can be used by the pre and post adapter)
- *exportCustomFormatRunFileActivity* to export a custom format run info file that can be used by the model
- *exportAreaSelectionActivity* exports bitmasks for the model adapter with a polygon embedded in the `TaskProperties` as input (is currently only used within NGMS)
- *exportLocationAreaActivity* exports bitmasks for the model adapter with location ids from the `TaskProperties` as input (is currently only used within NGMS)

For most types of `exportActivity`, multiple entries may exist.

NB. See also the `exportPlaceholderFile` option in the several `importActivities`, which is another form of preparing input for the module adapter.

exportStateActivity

ExportStateActivityComplexType

fews:description

Optional description for the activity.

fews:moduleInstanceld

ID of the module instance for which the state will be exported.

fews:ensembleId

Export state exported by this ensemble

fews:ensembleMemberIdSubstringPattern

Use a sub string of the active ensemble member id as member id when resolving the state. For example use (...) to use the first three characters of the active ensemble member id

fews:stateExportDir

Directory to which the module instance state is to be exported. This should be the path where the model expects to find the state file(s). This should be either an absolute path or a path relative to the exportDir defined in the general section. All contents of the stored state are exported to this directory.

fews:stateConfigFile

Deprecated, do not use this if a pi state description xml file is not needed. Fully qualified name of the XML file containing the state export configuration. This should be either an absolute path or a path relative to the exportDir defined in the general section. This option writes the input state file paths to a pi state description xml file.

fews:stateLocations

Deprecated, do not use this if a pi state description xml file is not needed. The locations of the state. In case the state consists of a whole directory only one stateLocation is allowed. This option writes the input state file paths to a pi state description xml file.

fews:stateSelection


State specific settings. They can be overruled by the TaskProperties. When not specified the state selection in the workflow descriptor is used. Time settings are relative to time0.

fews:adjustTimeSeriesStartTime

Adjusts the start time of time series to the exported state time within this general adapter run when start is overrutable or not specified. Default is true

fews:loopTimeStep

When specified all activities are run in a loop to ensure on every cardinal time a state is produced. This has two advantages. States are equally and frequently distributed over time so it possible to start a update run from every point, also half way a cold update run that spans several days. The other advantage is the restriction on memory consumption, you can run over months without going out of RAM. States will be produced on every cardinal time between the exported state time and time0. After finishing all activities, all the activities are run again until all states have been produced until time0. Do not specify a relative view period for the time series sets in the export activities when you need time series from input to output state time.

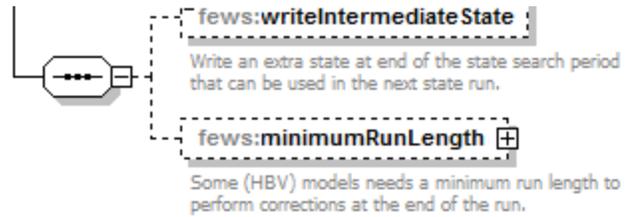

Generated by XMLSpy

www.altova.com

Figure 70 Elements of the ExportStateActivity section.

description

Optional description for the export states configuration. Used for reference purposes only.

moduleInstanceld

Id of the moduleInstance that has written the state to be exported. Generally this will be the same as the Id of the current instance of the General Adapter. This can also be the ID of another instance of the General Adapter. The latter is the case when using a state in a forecast run that has been written in an historical run.

ensembleId

Export state exported by this ensemble.

ensembleMemberIdSubstringPattern

Use a sub string of the active ensemble member id as member id when resolving the state. Fore example use (...) to use the first three characters of the active ensemble member id.

stateExportDir

Directory to which the module instance state is to be exported. This should be the path where the model expects to find the state file(s). This should be either an absolute path or a path relative to the exportDir defined in the general section. All contents of the stored state are exported to this directory.

stateConfigFile

Optional. Deprecated, do not use this if a pi state description xml file is not needed. Name (and location) of the PI-XML file describing the states. If the directory location is not explicitly specified the file will be written in the exportDir defined in the general section. This should be either an absolute path or a path relative to the exportDir defined in the general section. This option writes the input state file paths to a pi state description xml file.

stateLocations

Optional. Deprecated, do not use this if a pi state description xml file is not needed. Root element for the description of the state. Both a read location and a write location will need to be defined. This allows the name of the file(s)/directory to be different on read and write. Multiple locations may be defined, but these must all be of the same type. This option writes the input state file paths to a pi state description xml file.

- *Attributes* type: indication of type of state to be imported. This may either be "directory" or "file". Note that multiple locations are supported only if type is "file".
- *stateLocation* - Root element of a state location
- *readLocation* - Location where the external module will read the state. This is the location (and name of file/directory) where the General Adapter writes the state. This should be either an absolute path or a path relative to the stateExportDir defined in this activity.
- *writeLocation* - Location where the external module is expected to write the state. This is the location (and name of file/directory) where the General Adapter expects to read the state. This should be an absolute path.

```
<stateLocations type="file">
  <stateLocation>
    <readLocation>state.inp</readLocation>
    <writeLocation>state.out</writeLocation>
  </stateLocation>
</stateLocations>
```

stateSelection

Root element to specify how a state to be exported to the external module is to be selected. Two main groups are available, cold states and warm states. Only one of these types can be specified. Note that if a warm state selection is specified and an appropriate warm state cannot be found, a cold state will be exported by default.

- *coldState* - Root element for defining the stateSelection method to always export a cold state.
- *groupId* - Id of the group of cold states to be used. This must be a groupId as defined in the ColdModuleInstanceStateGroups configuration (see Regional Configuration).

- *coldState.startDate* - Definition of the start date of the external module run when using the cold state. This startDate is specified relative to the start time of the forecast run. A positive startDate means it is before the start time of the forecast run.
- *coldState.fixedStartTime* - (Since 2012_02) the start date can be configured as an fixed time
- *warmState* - Root element for defining the stateSelection method to search for the most suitable warm state.
- *stateSearchPeriod* - Definition of the search period to be used in selecting a warm state. The database will return the most recent suitable warm state found within this search period.
- *coldState.Time* - Definition of the start time to use for a cold state if a suitable state is not found within the warm state search period.
- *insertColdState* - When you set insertColdState to true, the defaultColdState is inserted into the WarmStates when no WarmState is found inside the stateSearchPeriod. By default the cold state is not inserted as warm state

```
<stateSelection>
  <warmState>
    <stateSearchPeriod unit="hour" start="-48" end="0" />
    <coldStateTime unit="hour" value="-48" />
    <insertColdState>true</insertColdState>
  </warmState>
  <overrulingColdStateModuleInstanceId>ExportStateActivityOverrulingColdState<
/overrulingColdStateModuleInstanceId>
</stateSelection>
```

The stateSearch period for a warm state selection must be carefully configured. If the time span between the end of the state search period and the start of forecast is longer than the frequency of forecasts then the span between the coldStateTime and the start of the state search period must be at least as long. The insertColdState option must be set to true. If this is not done, then the warm state of the first state run will not be found by the next state run, resulting in subsequent forecasts using alternating warm states.

overrulingColdStateModuleInstanceId

Different module instance id used for finding cold state (when warm state is configured but can't be found, or always when cold state is configured)

adjustTimeSeriesStartTime

Optional. Adjusts the start time of time series to the exported state time within this general adapter run when start is overrutable or not specified. Default is true.

loopTimeStep

When specified, all activities are run in a loop to ensure that a state is produced on every cardinal time step between the time of the exported state and T0. This has two advantages:

- states are distributed over time equally and frequently. It is possible to start an update run from every point, also half way of a cold update run that spans several days.
- restriction of memory consumption. You can run an update run over months without going out of RAM.

 Do not specify a relative view period for all time series sets in the export activity

writeIntermediateState

When specified, an extra state is written at the end of the state search period. Note that the run is then split in two. E.g my state search period is -10 to -4 days, then there are two update runs, one from the time where a state was found to -4 and one from -4 to T0. A state is written at the end of both runs (T0 and T0 - 4days). You can additionally define a minimum run length. This is necessary for some runs that need a minimum run length for e.g. PT updating. The run is then only split in two if both runs can be run over the minimum run length. If not, there is only one run and the state is written to the end of this run (T0), no intermediate state is written.

minimumRunLength

Optional. Some (HBV) models need a minimum run length to perform corrections at the end of the run.

see example configuration below and this [figure](#)

Configuration example

New example that does not use a pi state description xml file. In this case, if the model adapter needs to know the input state file paths, then these can be read from the netcdf version of the run info file (which can be exported using the new ExportNetcdfRunFileActivity described below):

```
<exportStateActivity>
  <moduleInstanceId>HBV_AareBrugg_Hist</moduleInstanceId>
  <stateExportDir>%ROOT_DIR%/FEWS/states</stateExportDir>
  <stateSelection>
    <warmState>
      <stateSearchPeriod unit="hour" start="-240" end="-96"/>
    </warmState>
  </stateSelection>
  <writeIntermediateState>true</writeIntermediateState>
  <minimumRunLength unit="day" multiplier="4"/>
</exportStateActivity>
```

Old example that writes the input state file paths to a pi state description xml file. Do not use this if a pi state description xml file is not needed:

```
<exportStateActivity>
  <moduleInstanceId>HBV_AareBrugg_Hist</moduleInstanceId>
  <stateExportDir>%ROOT_DIR%/FEWS/states</stateExportDir>
  <stateConfigFile>%ROOT_DIR%/FEWS/states/states.xml</stateConfigFile>
  <stateLocations type="file">
    <stateLocation>
      <readLocation>HBV_States.zip</readLocation>
      <writeLocation>HBV_States.zip</writeLocation>
    </stateLocation>
  </stateLocations>
  <stateSelection>
    <warmState>
      <stateSearchPeriod unit="hour" start="-240" end="-96"/>
    </warmState>
  </stateSelection>
  <writeIntermediateState>true</writeIntermediateState>
  <minimumRunLength unit="day" multiplier="4"/>
</exportStateActivity>
```

exportTimeSeriesActivity

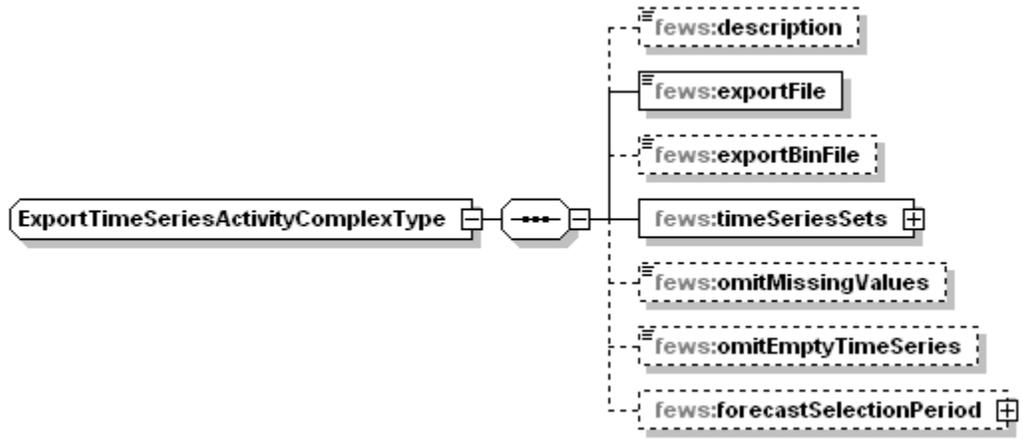


Figure 71 Elements of the exportTimeSeries section

description

Optional description of the timeSeries export configuration.

exportFile

Name (and location) of the PI-XML file with exported time series. If the directory location is not explicitly specified the file will be written in the exportDir defined in the general section.

exportBinFile

When true the events in the PI time series file are written to a binary file instead of the xml file. The written xml file will only contain the time series headers and optionally a time zone. The binary file has the same name as the xml file only the extension is "bin" instead of "xml". During PI time series import the bin file is automatically read when available. The byte order in the bin file is always Intel x86.

ignoreRunPeriod

When true the run period, written in the pi run file, will not be extended.

includeThresholds

When true any thresholds for the exported timeseries will be written in the timeserie headers

timeSerieSets

Root element for defining timeSerieSets to be exported.

timeSerieSets: timeSerieSet

TimeSeriesSets to be exported. These may contain either a (list of) locations or a locationSet. Multiple entries may be defined.

omitMissingValues

Includes missing values in the export file or leave them out.

checkMissingValues

Option to check the timeseries for missing values. This option works in combination with the Parameter element 'allowMissing'. If that allowMissing is set to false, you can check for missing values. So if checkMissingValues = true and allowMissing=false, an error will occur in case there are missing values to be exported. As such, you can prevent to run a model with missing values and let the General Adapter stop with an error.

omitEmptyTimeSeries

When true, a series is not exported when the time series is empty (or when omitMissingValues = true, when the time series is empty after removing the missing values.)

forecastSelectionPeriod

Can be used to select all approved forecasts with a forecast start time lying within this period

ignoreNonExistingLocationSets

Option to skip time series sets if the location set does not exist. Useful when module or workflow is run in loop with tags being translated. Default is 'false'.

exportMapStacksActivity

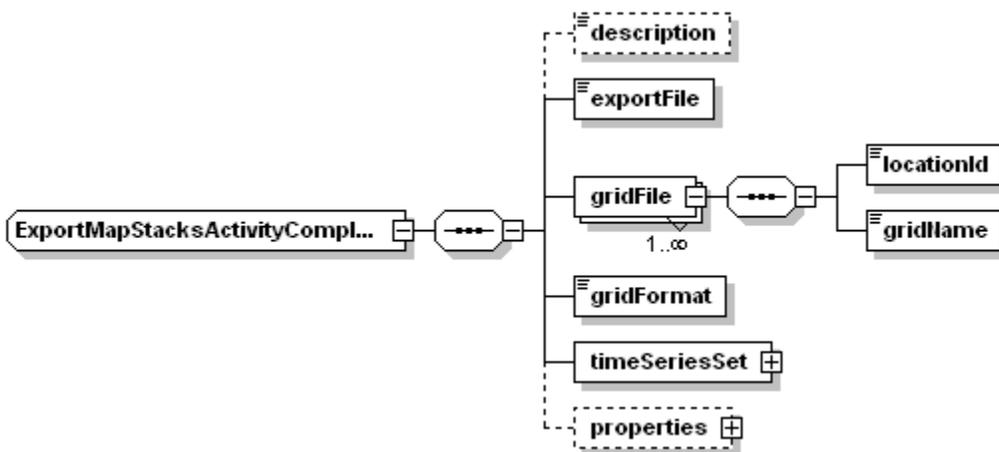


Figure 72 Elements of the ExportMapStacksActivity.

description

Optional description of the timeSeries export configuration.

exportFile

Name (and location) of the PI-XML file describing the map stack of the exported grid time series. If the directory location is not explicitly specified the file will be written in the exportDir defined in the general section.

gridFile

Root element for defining file name of grid to be exported

locationId

LocationId for grid to be exported.

gridName

Name of the files for the grid to be exported. For grid files where each time slice is stored in a different file, this name is the prefix for the full file name. The final file name is created using an index of files exported (e.g the file name for the 4th time step is grid00000.004).

gridFormat

Format of the exported grid. Enumeration of options include;

- *asc*: for exporting to ARC-INFO ASCII grid format
- *pcrgrid*: for exporting to PCRaster native grid file format
- *usgs*: for exporting to USGS DEM format (BIL)

timeSeriesSet

TimeSeriesSets to be exported. These should contain only one locationId. For exporting multiple grids, multiple exportMapStack activities should be defined.

exportProfilesActivity

Configuration of the exportProfiles activity is identical to the exportTimeSeries Activity.

When using a state search period in the General Adapter configuration, the timeSeriesSets to be exported should not contain a start time in the Relative View Period. The start time of the run is determined by the state found. A startOverrullable item should also not be included

exportDataSetActivity

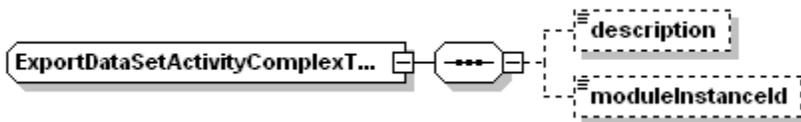


Figure 73 Elements of the exportDataSets section

description

Optional description of the module dataset export configuration.

moduleInstanceld

Optional reference to the moduleInstanceld of the moduleDataSet to be exported. If not defined the moduleInstanceld of the current module instance is taken as a default (see section on Module Datasets and Parameters).

exportParameterActivity

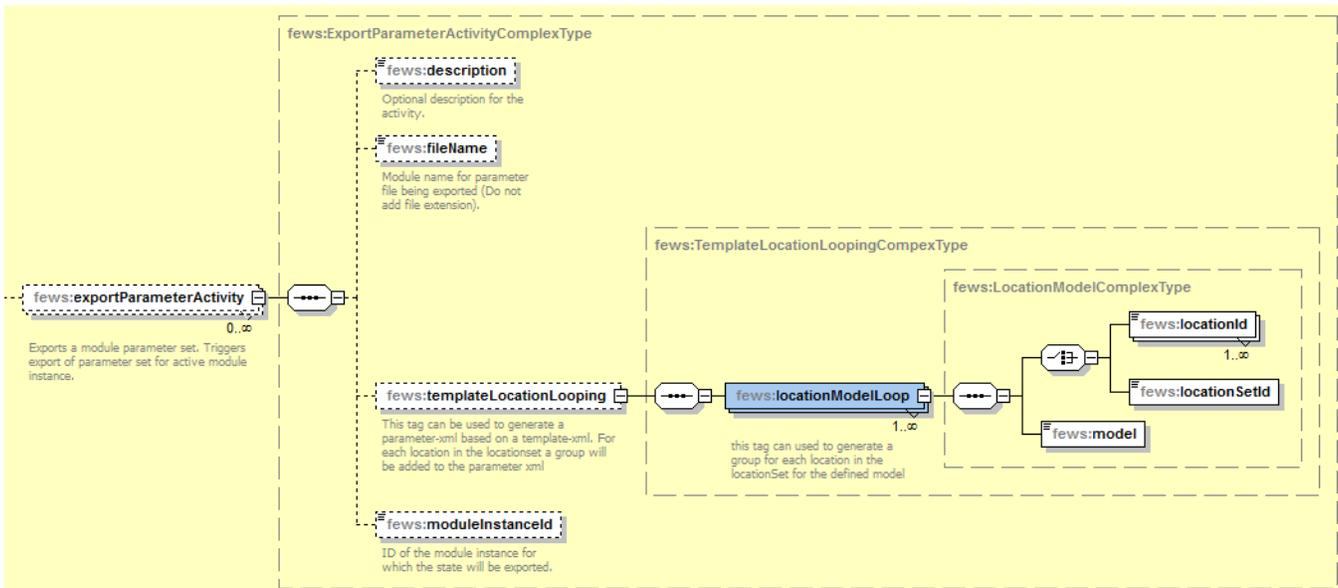


Figure 74 Elements of the exportParameter section

description

Optional description of the module parameter configuration.

moduleInstancelid

Optional reference to the moduleInstancelid of the moduleParameter to be exported. If not defined the moduleInstancelid of the current module instance is taken as a default (see section on Module Datasets and Parameters). The parameterfile should be stored in the folder configModuleParFiles.

fileName

Name (and location) of the PI-XML file with exported parameters. If the directory location is not explicitly specified the file will be written in the exportDir defined in the general section.

templateLocationLooping

It is possible to have the parameterfile filled with location attributes. When exporting the parameter file, FEWS will loop over all the locations in the given locationSet, or through the given locationIds, and add the configured attributes to the parameterfile. For an example of a template parameterfile, see 02 Module Parameters. Notice that the element "model" references to the model in the template parameter file.

exportTableActivity

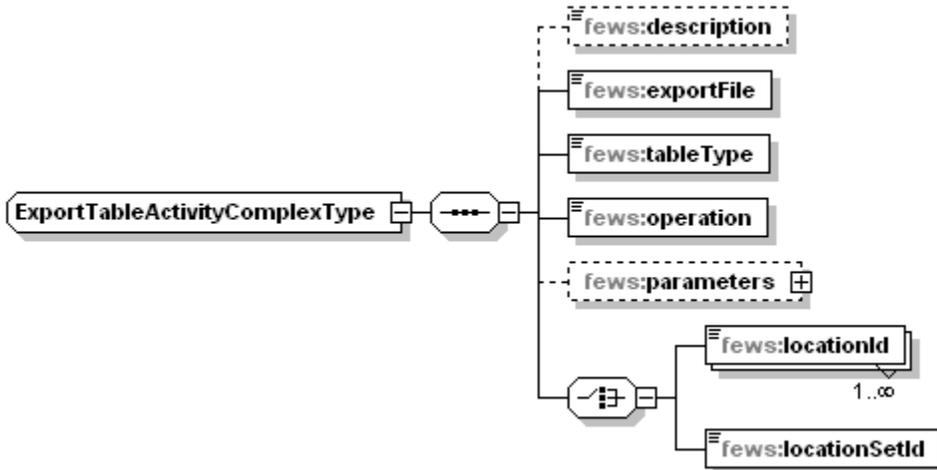


Figure 1 Elements of the ExportTableActivity configuration

description

Optional description of the ExportTableActivity configuration.

exportFile

File to which the table will be exported. This file is always placed in exportDir.

tableType

Type of table to be exported. Currently enumeration must be "ratingCurve"

operation

ID of the table to be exported.

parameters

Parameters for the convertEquation operation. Must include minimumLevel, maximumLevel and stepSize


locationId/locationSetId

location id to select the rating curve

exportNetcdfActivity

Exports scalar, grid or 1d/2d spectra time series to a NetCDF file. All time series specified inside one exportNetcdfActivity must have the same value type (grid, scalar, 1d spectra or 2d spectra). For this export it is required that all ensembles have exactly the same ensemble member indices. The usage of ensemble member id's (strings) is not supported yet.

Compacting netCDF variables with scale factor and offset into a smaller integer typed variable is not available in contrast to the archive export (applied whenever possible) and time series export (applied when possible if property tryCompactingNetCDFData is set to true).

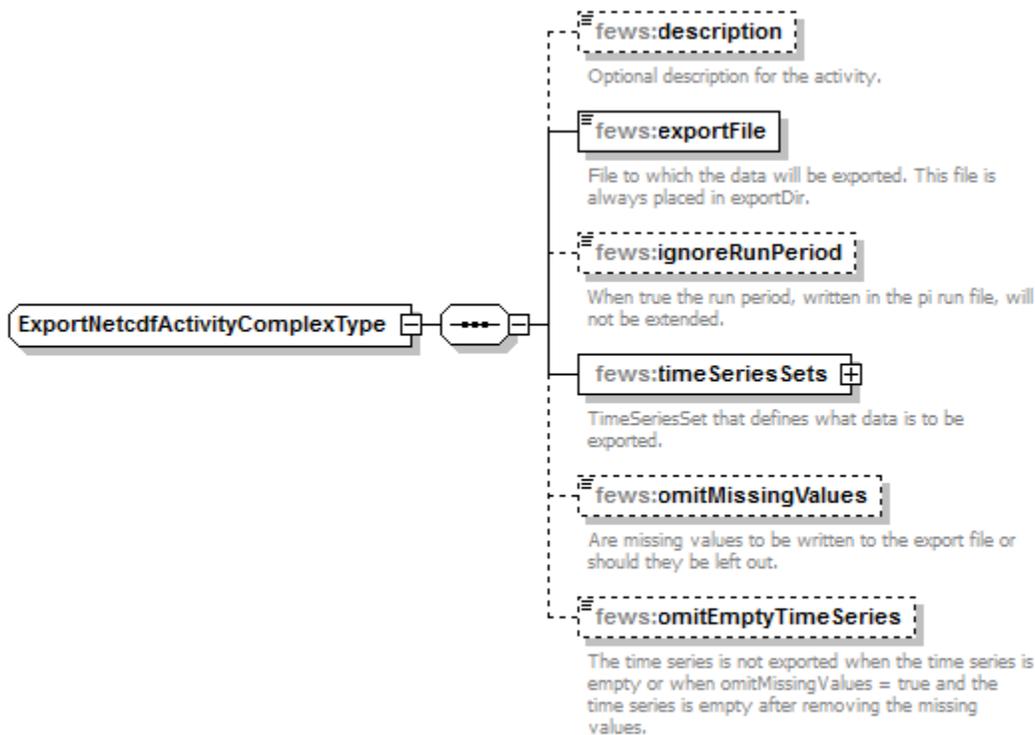

Generated by XMLSpy

www.altova.com

Figure 2 Elements of the ExportNetcdfActivity configuration

description

Optional description of the ExportNetcdfActivity configuration.

exportFile

File to which the data will be exported. This file is always placed in exportDir.

timeSeriesSets

TimeSeriesSet that defines what data is to be exported.

omitMissingValues

Include missing values in the export file or leave them out.

omitEmptyTimeSeries

The time series is not exported when the time series is empty or when; omitMissingValues = true and the time series is empty after removing the missing values.

ignoreNonExistingLocationSets

Option to skip time series sets if the location set does not exist. Useful when module or workflow is run in loop with tags being translated. Default is 'false'.

exportRunFileActivity

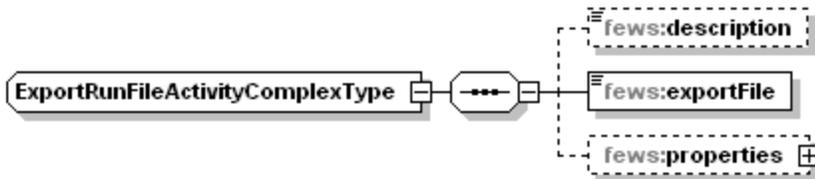


Figure 3 Elements of the ExportRunFileActivity configuration

description

Optional description of the ExportRunFileActivity configuration.

exportFile

File to which the data will be exported. This file is always placed in exportDir.

properties

Kind of environment variables for the pre and post adapters. These properties are copied to the run file. This is also a convenient way to pass global properties to a pre or post adapter. An adapter is not allowed to access the FEWS global.properties directly. Global properties (between \$) are replaced by their literal values before copied to the run file. These extra options make an additional pre or post adapter configuration file unnecessary.

Options:


- string
- int
- float
- double (since stable build 2014.01)
- bool

example of exported run file

```
<Run xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns="http://www.wldelft.nl/fews/PI" xsi:
schemaLocation="http://www.wldelft.nl/fews/PI http://fews.wldelft.nl/schemas/version1.0/pi-schemas/pi_run.xsd"
version="1.5">
  <logLevel>info</logLevel>
  <timeZone>0.0</timeZone>
  <startDateTime date="1900-01-01" time="00:00:00"/>
  <endDateTime date="2100-01-01" time="00:00:00"/>
  <time0 date="2000-01-01" time="00:00:00"/>
  <workDir>workdir</workDir>
  <outputDiagnosticFile>diagnostic</outputDiagnosticFile>
</Run>
```

exportNetcdfRunFileActivity (since stable build 2014.01)

Exports a run file in netcdf format. The netcdf run file contains general information about the run executed by the general adapter that can be used by the pre and post adapter.

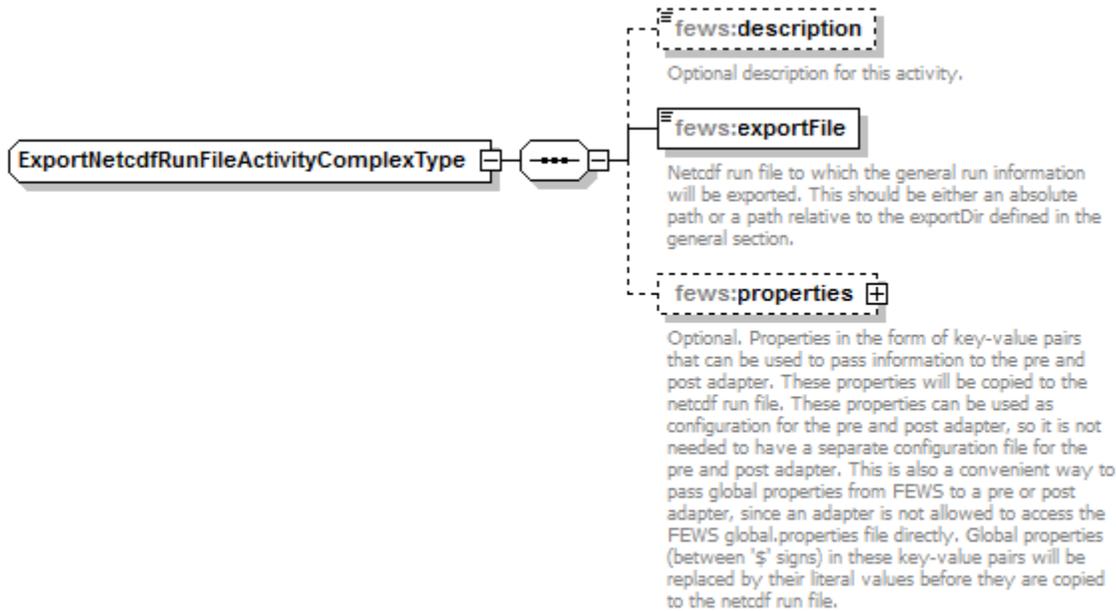

Generated by XMLSpy

www.altova.com

Elements of the ExportNetcdfRunFileActivity configuration

description

Optional description for this activity.

exportFile

Netcdf run file to which the general run information will be exported. This should be either an absolute path or a path relative to the exportDir defined in the general section.

properties

Optional. Properties in the form of key-value pairs that can be used to pass information to the pre and post adapter. These properties will be copied to the netcdf run file. These properties can be used as configuration for the pre and post adapter, so it is not needed to have a separate configuration file for the pre and post adapter. This is also a convenient way to pass global properties from FEWS to a pre or post adapter, since an adapter is not allowed to access the FEWS global.properties file directly. Global properties (between '\$' signs) in these key-value pairs will be replaced by their literal values before they are copied to the netcdf run file.

Options:

- string
- int
- float
- double (since stable build 2014.01)
- bool

Configuration example

```
<exportNetcdfRunFileActivity>
  <description>This run file is passed as argument to XBeachPreAdapter</description>
  <exportFile>run_info.nc</exportFile>
  <properties>
    <bool key="use_friction" value="true"/>
  </properties>
</exportNetcdfRunFileActivity>
```

Example of an exported netcdf run file (converted to text format):

A netcdf run file will be generated by FEWS and contains information that is needed by the pre/post adapter.

The variables input_netcdf_files and input_state_files are optional and list the files that are exported from FEWS. The variables output_netcdf_files and output_state_files are optional and list the files that need to be imported by FEWS.

The attributes of the properties variable form the configuration for the pre/post adapter and can be configured in FEWS (both the attribute names and attribute values are configurable).

All paths in the netcdf run file are relative to the parent directory of the netcdf run file.

An example of a netcdf run file can be downloaded here: run_info_example.nc. Below is the same example netcdf run file, converted to text format:

```
netcdf run_info_example {
dimensions:
    path_length = 255 ;
    input_netcdf_file_count = 2 ;
    input_state_file_count = 1 ;
    output_netcdf_file_count = 2 ;
variables:
    double start_time ;
        start_time:long_name = "start_time" ;
        start_time:standard_name = "time" ;
        start_time:units = "minutes since 2002-11-26 00:00:00.0 +0000" ;
    double end_time ;
        end_time:long_name = "end_time" ;
        end_time:standard_name = "time" ;
        end_time:units = "minutes since 2002-11-26 00:00:00.0 +0000" ;
    char work_dir(path_length) ;
    char input_netcdf_files(input_netcdf_file_count, path_length) ;
    char input_state_files(input_state_file_count, path_length) ;
    char output_netcdf_files(output_netcdf_file_count, path_length) ;
    char properties ;
        properties:string_property = "zs_0 with spaces" ;
        properties:INT_property = 3 ;
        properties:float_PROPERTY = 3.5f ;
        properties:DOUBLE_PROPERTY_321 = 0.123456789 ;
        properties:logical_property_1 = "true" ;
        properties:logical_property_2 = "false" ;

// global attributes:
    :title = "Run file" ;
    :institution = "Deltares" ;
    :source = "Run file from Delft-FEWS" ;
    :history = "2014-03-18 12:22:55 GMT: exported from Delft-FEWS to D:\
\\fews\workspace\junit_test_output\nl\wldelft\fews\system\plugin\generaladapter\exportDir\run_in
fo.nc" ;
    :references = "http://www.delft-fews.com" ;
data:

    start_time = 0 ;

    end_time = 5880 ;

    work_dir = "..\work" ;

    input_netcdf_files =
        "..\work\boundary_data.nc",
        "..\work\more_boundary_data.nc" ;


    input_state_files =
        "..\input_state\state.inp" ;

    output_netcdf_files =
        "..\work\model_output_data1.nc",
        "..\work\model_output_data2.nc" ;

    properties = " " ;
}
```

exportCustomFormatRunFileActivity

Activity to create a custom run info file. This activity replaces tags in a template file with actual (modified) values. The template file can contain location attribute tags between '@' signs, general adapter tags between '%' signs and global properties between '\$' signs. The specified template file will be copied to the specified export file before the tags are replaced. So the template file itself is not changed. If the export file already exists, then it will be overwritten.

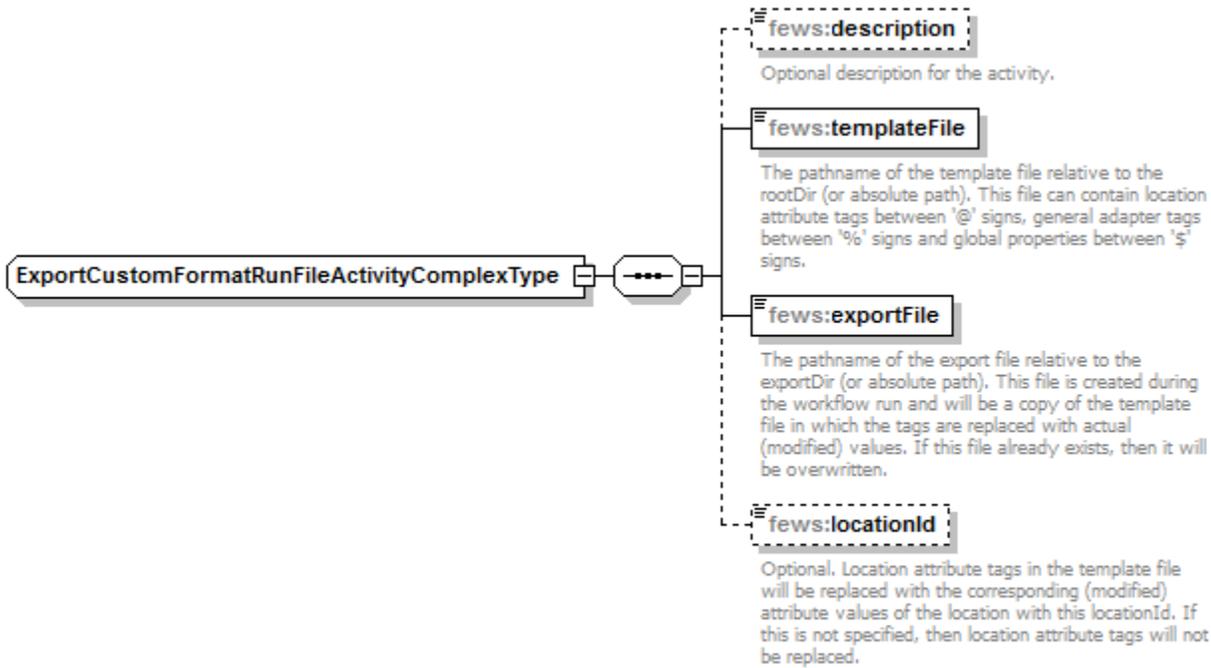

Generated by XMLSpy

www.altova.com

Elements of the ExportCustomFormatRunFileActivity configuration

Note: this feature is deprecated. Better use the export(Netcdf)RunFileActivity in combination with a model pre-adapter instead.

description

Optional description for the activity.

templateFile

The pathname of the template file relative to the rootDir (or absolute path). This file can contain location attribute tags between '@' signs, general adapter tags between '%' signs and global properties between '\$' signs.

In addition to the tags specified in the documentation on the general section, also tags %START_DATE_TIME% and %END_DATE_TIME% are accommodated

exportFile

The pathname of the export file relative to the exportDir (or absolute path). This file is created during the workflow run and will be a copy of the template file in which the tags are replaced with actual (modified) values. If this file already exists, then it will be overwritten.

locationId

Optional. Location attribute tags in the template file will be replaced with the corresponding (modified) attribute values of the location with this locationId. If this is not specified, then location attribute tags will not be replaced.

fixedWidth

Available since 2017.02. Optional field used to specify the width (length in characters) the location attribute tags and global properties ('@' and '\$') should be replaced with. The result will be padded on the left with the required number of spaces. Note that if no numberOfDecimals is specified, all number attributes will be rounded based on the number of significant digits that will fit in the configured fixedWidth. If a numberOfDecimals is specified, the number attributes will be rounded to the specified number of decimals instead. If the text for any attribute or global property contains more than the specified number of characters, a warning is logged and the value is outputted as is.

numberOfDecimals

Available since 2017.02. Optional field used to specify the number of decimals all number attributes ('@') should be rounded to. Note that when a fixedWidth is also specified, the rounded values must always fit in the number of characters specified.

configuration example

```

<generalAdapterRun xmlns="http://www.wldelft.nl/fews" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:
schemaLocation="http://www.wldelft.nl/fews http://fews.wldelft.nl/schemas/version1.0/generalAdapterRun.xsd">
  <general>
    ...
    <startDateTimeFormat>yyyy MM dd HH mm</startDateTimeFormat>
    <endDateTimeFormat>yyyy MM dd HH mm</endDateTimeFormat>
  </general>
  <activities>
    <exportActivities>
      <exportCustomFormatRunFileActivity>
        <templateFile>%ROOT_DIR%/templatefiles/event_tox2_template.inp</templateFile>
        <exportFile>event_tox2.inp</exportFile>
        <locationId>locationWithAttributes</locationId>
        <fixedWidth>10</fixedWidth>
        <numberOfDecimals>5</numberOfDecimals>
      </exportCustomFormatRunFileActivity>
    </exportActivities>
  </activities>
</generalAdapterRun>

```

Example of template file:

```

%START_DATE_TIME%           ! MODEL START           : ISYEAR, ISMONTH, ISDATE, ISHR, ISMN [year, month, day,
hour, minute]
%END_DATE_TIME%             ! MODEL STOP           : ISYEAR, ISMONTH, ISDATE, ISHR, ISMN [year, month, day,
hour, minute]
2                           ! TIME STEP            : [sec]
@TOXIC_ID@                  ! TOXIC ID             : CAS NO.-TOXIC, 444#-OI
@ACCIDENT_LOC_X@ @ACCIDENT_LOC_Y@ ! ACCIDENT LOC.       : X Y TM coordinate (referred in LXL.Y.INP)
@ACCIDENT_TIME@            ! ACCIDENT TIME       : IEVYEAR, IEVMONTH, IEVDATE, IEVHR, IEVMN [year, month,
day, hour, minute]
@spill_duration@           ! spill duration       : [MIN]
@spill_material_mass@      ! spill material mass  : [G]
10.                         ! CHLA                 : CHLA CONC. [UG/L] FOR TOXIC CALCULATION
5.                          ! TEM                  : WATER TEMPERATURE [DEGREE C] FOR TOXIC CALCULATION
5.                          ! SSC                  : Suspended Solid Conc. [MG/L] FOR TOXIC
CALCULATION
0.1                         ! DOC                  : DOC CONC. [MG/L] FOR TOXIC CALCULATION
100.                        ! I                    : IRADIATION [LY/DAY]
5.                          ! WSPD                 : WINDSPEED [M/S]
$SIMULATION_NUMBER$        ! simulation number
%TIME0%$Identifier$%TIME0% $Identifier$ ! test

```

Example of exported file:


```

2002 11 30 09 00           ! MODEL START           : ISYEAR, ISMONTH, ISDATE, ISHR, ISMN [year, month, day,
hour, minute]
2002 11 30 11 00           ! MODEL STOP           : ISYEAR, ISMONTH, ISDATE, ISHR, ISMN [year, month, day,
hour, minute]
2                           ! TIME STEP            : [sec]
131-52-2                   ! TOXIC ID             : CAS NO.-TOXIC, 444#-OI
235875.9 329956.4 ! ACCIDENT LOC.       : X Y TM coordinate (referred in LXL.Y.INP)
2012 01 10 09 00          ! ACCIDENT TIME       : IEVYEAR, IEVMONTH, IEVDATE, IEVHR, IEVMN [year, month,
day, hour, minute]
10.0                       ! spill duration       : [MIN]
500000.0                   ! spill material mass  : [G]
10.                         ! CHLA                 : CHLA CONC. [UG/L] FOR TOXIC CALCULATION
5.                          ! TEM                  : WATER TEMPERATURE [DEGREE C] FOR TOXIC CALCULATION
5.                          ! SSC                  : Suspended Solid Conc. [MG/L] FOR TOXIC
CALCULATION
0.1                         ! DOC                  : DOC CONC. [MG/L] FOR TOXIC CALCULATION
100.                        ! I                    : IRADIATION [LY/DAY]
5.                          ! WSPD                 : WINDSPEED [M/S]
73                          ! simulation number
200211300900FSS200211300900 FSS ! test

```

exportAreaSelectionActivity (currently NGMS only)

Exports an area selection mask as a PiMapStack. This activity requires an embedded polygon to be specified within the areaSelectionShapeFileBase64 field of the TaskProperties. This file is then available to be used by the pre and post adapter.

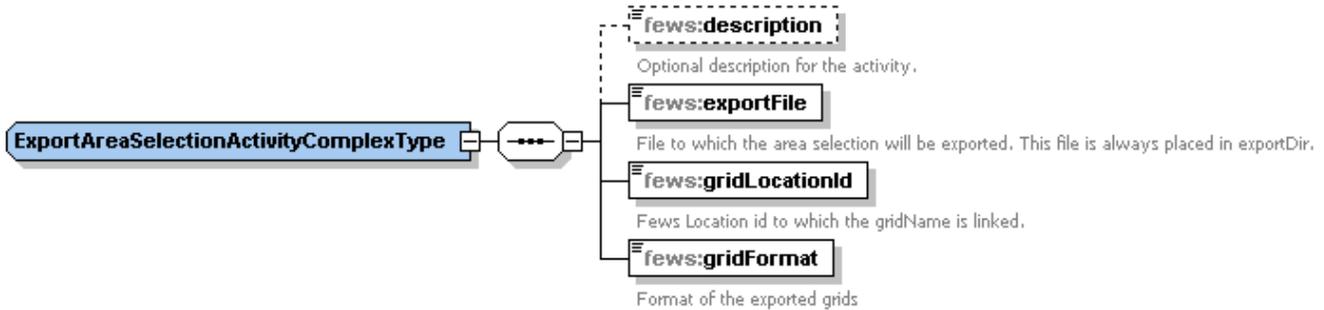

description

Optional description for the activity. Used for reference purposes only.

exportFile

File name of the file to be exported. Always placed into the export dir.

gridLocationId

Locations that contains the reference grid information.

gridFormat

Format of the PiMapStack file. Can be

- *asc*: for exporting to ARC-INFO ASCII grid format
- *pcrgrid*: for exporting to PCRaster native grid file format
- *usgs*: for exporting to USGS DEM format (BIL)

exportLocationAreaActivity (currently NGMS only)

Exports an area selection mask in the form of a PiMapStack. This activity requires selectedLocationIds to be specified within the TaskProperties. This selection is then available to be used by the pre and post adapter.

description

Optional description for the activity. Used for reference purposes only.

exportFile

File name of the file to be exported. Always placed into the export dir.

gridLocationId

Locations that contains the reference grid information.


gridFormat

Format of the PiMapStack file. Can be

- *asc*: for exporting to ARC-INFO ASCII grid format
- *pcrgrid*: for exporting to PCRaster native grid file format
- *usgs*: for exporting to USGS DEM format (BIL)


polygonLocationId

Identifier for locationset for which to generate grid files. The locations should have polygons associated with them.

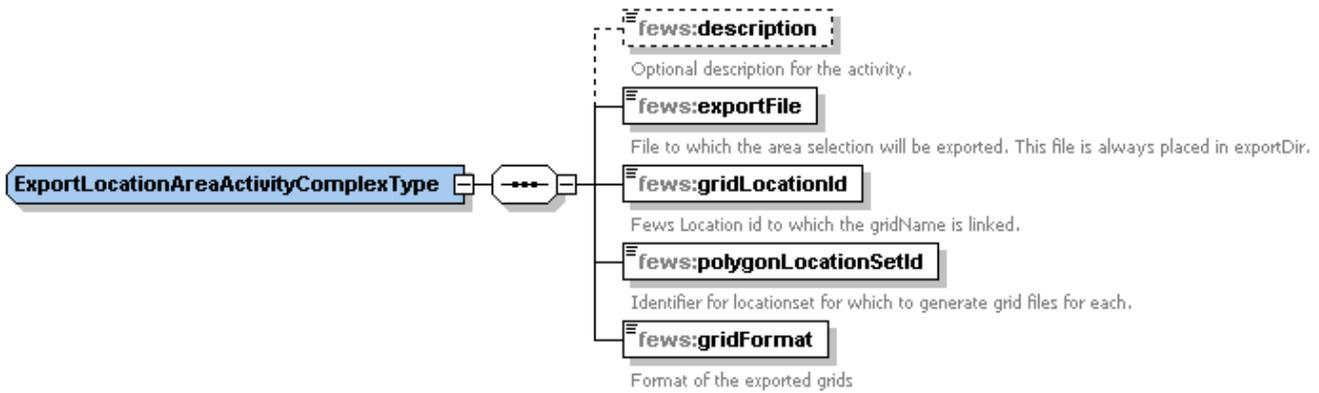

exportRatingCurveActivity

Exports rating curves to pi_ratingcurves.xml file. The rating curves with the start time within the GeneralAdapter run period will be exported.

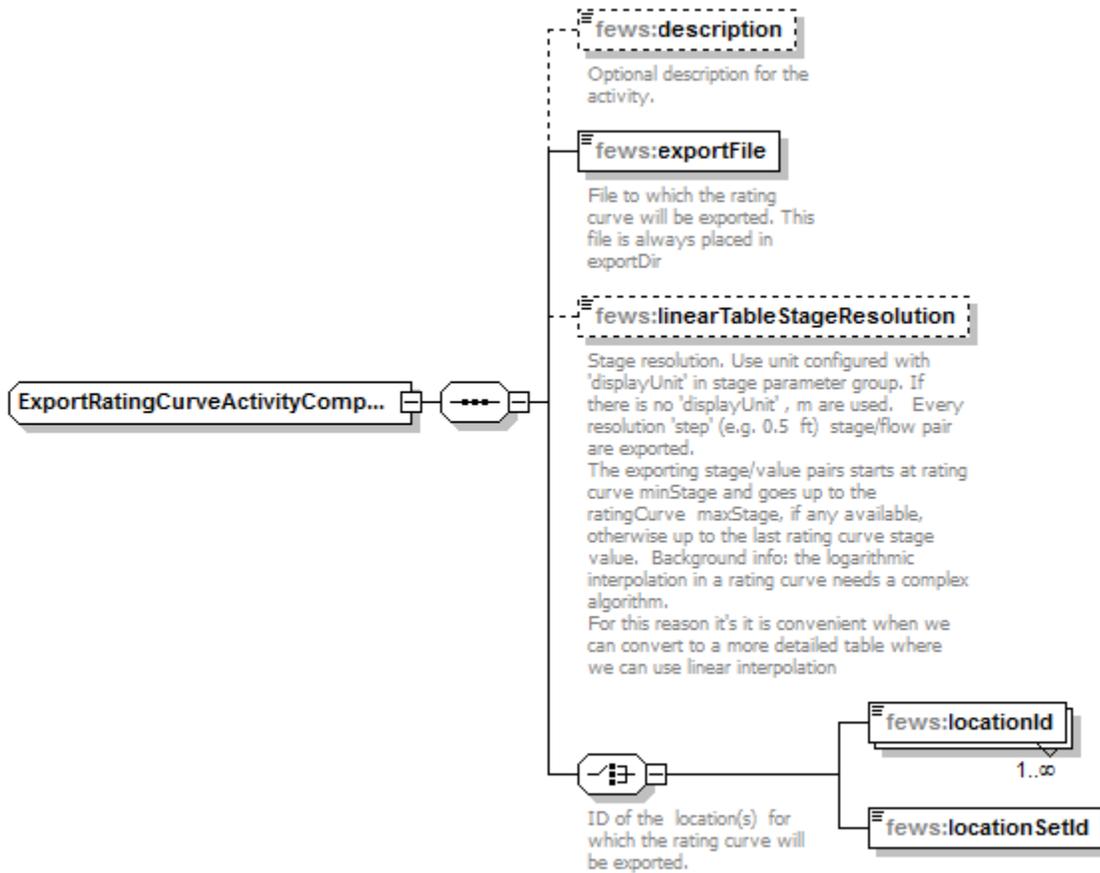

Generated by XMLSpy

www.altova.com

Figure 1 Elements of the exportRatingCurveActivity configuration

description

Optional description for the activity. Used for reference purposes only.

exportFile

File name of the file to be exported. Always placed into the export dir.

linearTableStageResolution

Stage resolution. Use unit configured with 'displayUnit' in stage parameter group. If there is no 'displayUnit' , m are used. Every resolution 'step' (e.g. 0.5 ft) stage/flow pair are exported. The exporting stage/value pairs starts at rating curve minStage and goes up to the ratingCurve maxStage, if any available, otherwise up to the last rating curve stage value. The logarithmic interpolation in a rating curve needs a complex algorithm. For this reason it's it is convenient when we can convert to a more detailed table where we can use linear interpolation


locationId

Locations the rating curves will be exported for.

locationSetId

Locations the rating curves will be exported for.

Execute Activities

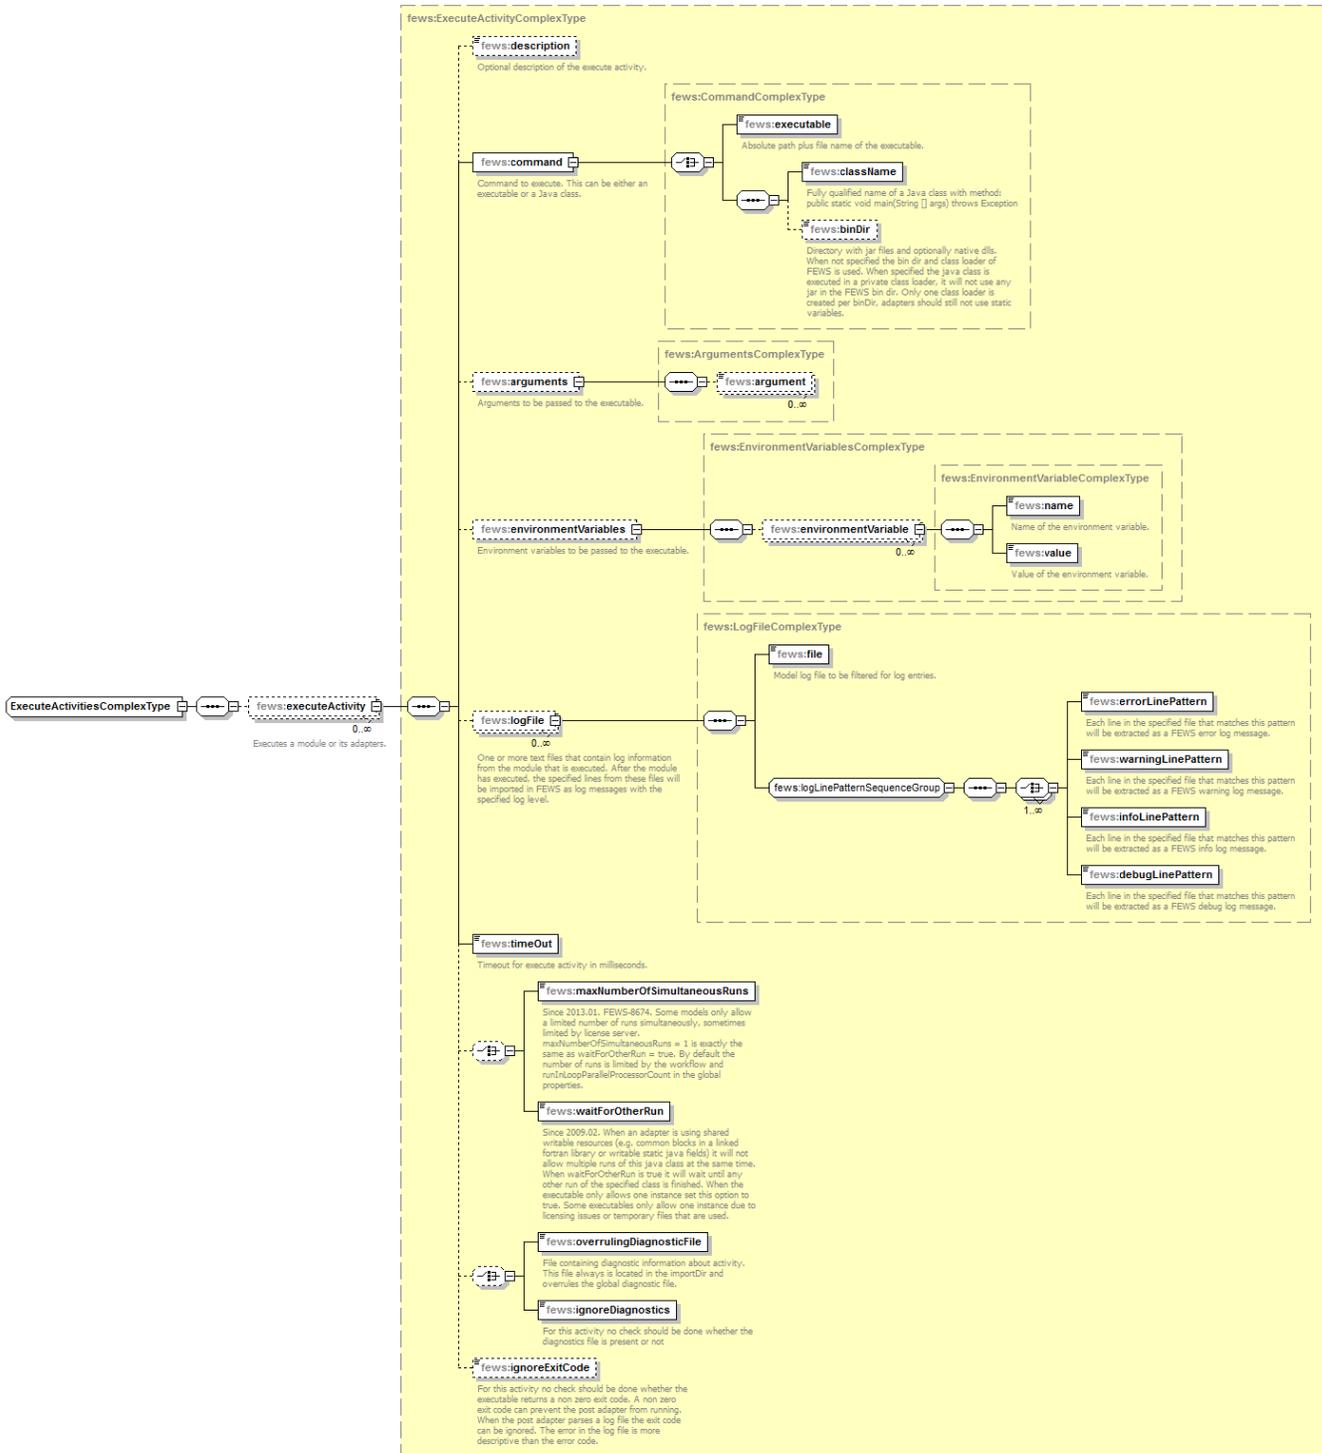

Elements of the ExecuteActivity configuration

executeActivity

Root element for the definition of an execute activity. Executes a module or its adapters. For each external executable or Java class to run, an executeActivity must be defined. Multiple entries may exist.

! In case of a failed run, Delft-FEWS attempts to terminate any child process afterwards. In order to be able to do this reliably, it is important to only create processes with a proper process tree. For instance, an unsupported option is to execute a Windows batch file starting executables in the background where the batch file terminates itself, leaving the child processes orphaned. This is illegal because Delft-FEWS cannot detect these as child processes and therefore not terminate the child processes. This will lead to model executables from dead taskruns to remain while possible locking files, blocking new runs with the same executable.

description

Optional description for the activity. Used for reference purposes only.

command

Root element to define command to execute. This can be either an executable or a Java class.

- executable - File name and location of the executable to run the command is an executable. The file name may include environment variables, as well as tags defined in the general adapter or on the global.properties.
- className - Name of Java Class to run if the command defined as a Java class. This class may be made available to Delft-FEWS in a separate JAR file in the \Bin directory.
- binDir - Optional. Directory with jar files and optionally native dlls. When not specified the bin dir and classloader of FEWS is used. When specified the java class is executed in a private class loader, it will not use any jar in the FEWS bin dir. Only one class loader is created per binDir, adapters should still not use static variables. All dependencies should also be in this configured bin dir.
- moduleDataSetName - Optional. As of 2014.02 it is possible to update the binaries in the binDir using a module data set. The loaded binaries will first be unloaded before the content of the module dataset is unpacked to binDir. Since 2017.01 the binDir will be deleted in order to update it, therefore a restriction has been build in that the binDir should be a sub directory of the region home or named "bin".
- customJreDir - Optional. As of 2016.01 it possible to configure a directory of a specific jre that should be used to run a java class. This could be required for modules that are not compatible with the java version used by FEWS.
- jvmArg - Optional, unbounded and only in combination of customJreDir. Specifies extra jvm arguments for instance -mx512m to give the jvm more memory than the -mx256m that FEWS uses by default for the custom jre.

Example customJre

```
<command>
  <className>nl.wldelft.fews.adapter.urbsiniadapter.UrbsIniAdapter</className>
  <customJreDir>%ROOT_DIR%/jre</customJreDir>
  <jvmArg>-mx512m</jvmArg>
</command>
```

arguments

Optional. Root element for defining arguments to be passed to the executable/Java class

- argument - Definition of an argument to be passed to the executable/Java Class

environmentVariables

Optional. Root element for defining environment variables prior to running the executable/Java class

- environmentVariable - Definition of an environment variable prior to running the executable/Java class
- environmentVariable.name - Name of environment variable
- environmentVariable.value - Value of environment variable

For example, to append some directory to the Windows PATH environment variable use:

Appending a directory to the Windows PATH environment variable

```
<environmentVariables>
  <environmentVariable>
    <name>path</name>
    <value>%PATH%;%ROOT_DIR%\wflow_bin;</value>
  </environmentVariable>
</environmentVariables>
```

logFile (since stable build 2014.01)

Optional. One or more text files that contain log information from the module that is executed. After the module has executed, the specified lines from these files will be imported in FEWS as log messages with the specified log level.

- file - Path and name of a log file to be filtered for log entries. This should be either an absolute path or a path relative to the rootDir defined in the general section.
- errorLinePattern - Each line in the specified file that matches this pattern will be extracted as a FEWS error log message.
- warningLinePattern - Each line in the specified file that matches this pattern will be extracted as a FEWS warning log message.
- infoLinePattern - Each line in the specified file that matches this pattern will be extracted as a FEWS info log message.
- debugLinePattern - Each line in the specified file that matches this pattern will be extracted as a FEWS debug log message.

- restartWorkflowLinePattern - The first line in the specified file that matches this pattern will restart the complete root workflow (Since 2018.01)

Configuration example:

```
<logFile>
  <file>XBerror.txt</file>
  <!-- Import every line as a separate FEWS error log message. -->
  <errorLinePattern>*</errorLinePattern>
</logFile>
<logFile>
  <file>XBwarning.txt</file>
  <!-- Import every line that contains "warning" as a separate FEWS info log message. -->
  <infoLinePattern>*warning*</infoLinePattern>
</logFile>
<logFile>
  <file>XBlog.txt</file>
  <!-- Import every line that contains "ERROR" as a separate FEWS debug log message. -->
  <debugLinePattern>*ERROR*</debugLinePattern>
</logFile>
```

timeOut

Timeout to be used when running module (in milliseconds). If run time exceeds timeout it will be terminated and the run considered as having failed.

maxNumberOfSimultaneousRuns

Optional. Since 2013.01. FEWS-8674. Some models only allow a limited number of runs simultaneously, sometimes limited by license server. maxNumberOfSimultaneousRuns = 1 is exactly the same as waitForOtherRun = true. By default the number of runs is limited by the workflow and runInLoopParallelProcessorCount in the global properties.

waitForOtherRun

Optional. Since 2009.02. When an adapter is using shared writable resources (e.g. common blocks in a linked fortran library or writable static java fields) it will not allow multiple runs of this java class at the same time. When waitForOtherRun is true it will wait until any other run of the specified class is finished. When the executable only allows one instance set this option to true. Some executables only allow one instance due to licensing issues or temporary files that are used.

overrulingDiagnosticFile

Optional. File containing diagnostic information about activity. This file always is located in the importDir and overrules the global diagnostic file.

ignoreDiagnostics

Optional. For this activity no check should be done whether the diagnostics file is present or not.

ignoreExitCode

Optional. For this activity no check should be done whether the executable returns a non zero exit code. A non zero exit code can prevent the post adapter from running. When the post adapter parses a log file the exit code can be ignored. The error in the log file is more descriptive than the error code.

Internal GA variables


Several variables are available to be used as an argument to an external program or in the [exportCustomFormatRunFileActivity](#). You can use in any filename or directory the properties from the global.properties file or the next internal variables:

- TEMP_DIR. The %TEMP_DIR% variable is an internal variable which points to a unique temporary directory which is created in the \$REGION_HOME\$/Temp and which will be removed afterwards.
- ROOT_DIR
- WORK_DIR
- ENSEMBLE_MEMBER_ID
- ENSEMBLE_MEMBER_INDEX
- TIME0
- START_DATE_TIME (the START_DATE_TIME variable only works in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02)).
- END_DATE_TIME (the END_DATE_TIME variable only works in an importStateActivity (since 2014.02) and inside a template file for an exportCustomFormatRunFileActivity (since 2013.02)).
- CURRENT_TIME (since 2015.01)
- TASK_ID
- TASK_RUN_ID
- TASK_RUN_ID_FOR_PATH
- TASK_DESCRIPTION
- TASK_USER_ID
- WHAT_IF_ID (Since 2016.02 build 65440)

- WHAT_IF_NAME (Since 2016.02 build 69419)
- TIME_ZONE_OFFSET_SECONDS

The colon characters ":" will be replaced by an underscore "_". Use the internal variables with % characters (like %TEMP_DIR%) and the global.properties variables with \$ characters (like e.g. \$DUMP_DIR\$).

Import Activities

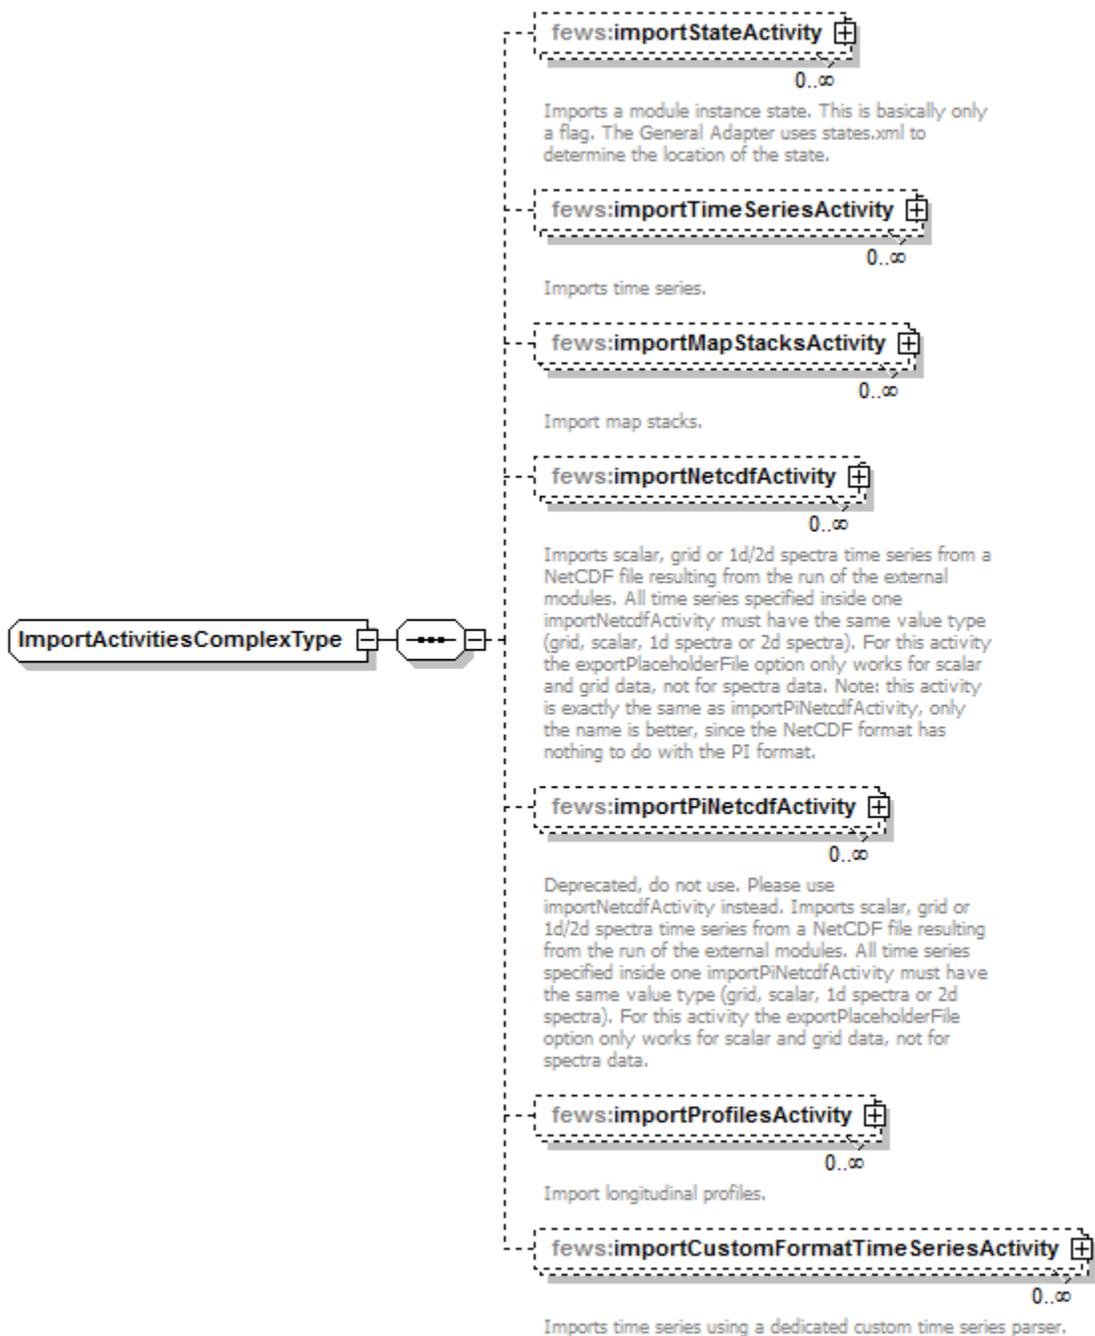

Generated by XMLSpy

www.altova.com

Figure 76 Elements of the ImportActivities configuration

`exportPlaceholderFile`

 Option `exportPlaceholderFile` is not supported for spectra data.

This option can be used for all import activities, except for importStateActivity.

If `<exportPlaceholderFile>true</exportPlaceholderFile>`, then the General adapter will generate placeholder files. A placeholder file is a file with headers only, without timeseries. Its name is the same as the filename configured for the ImportActivity and this placeholderfile is written to the import directory. The placeholder files are written before any execute activity is started. The models cq model adapters should read this placeholder files to see which data should be provided to import in FEWS.

- `<importTimeSeriesActivity>` writes headers to `pi_timeseries.xml`
- `<importMapStacksActivity>` writes headers to `pi_mapstacks.xml`
- `<importNetcdfActivity>` writes headers to NetCDF file (only for scalar and grid data, not for spectra data) (It writes the variables as is and does not compact them into smaller types like short or byte like [tryCompactingNetCDFData in export module](#))
- `<importProfilesActivity>` writes headers to `pi_profiles.xml`

The intention of this `exportPlaceholderFile` functionality is that the model cq modeladapter reads the placeholders to see which timeseries are required by FEWS.

After simulation, the model cq modeladapter overwrites these files with its own data over the placeholder files ready to be imported by the import activity.


```
<importTimeSeriesActivity>
  <exportPlaceholderFile>true</exportPlaceholderFile>
  <importFile>output.xml</importFile>
  <timeSeriesSets>
    . . .
  </timeSeriesSets>
</importTimeSeriesActivity>
```

It is available in the same way for `importTimeSeriesActivity`, `importMapStacksActivity`, `importNetcdfActivity` (only for scalar and grid data, not for spectra data) and `importProfilesActivity`.

description

Optional description of import activity. Used for reference purposes only

importStateActivity

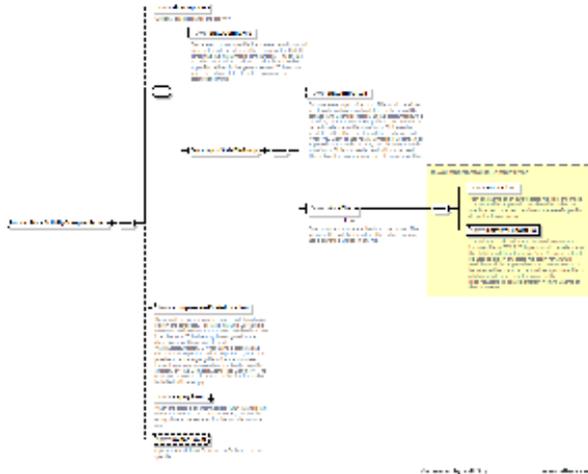

Elements of the ImportStateActivity section.

Root element for importing modules states resulting from the run of the external modules. Multiple elements may be defined. If no state is to be imported (for example in forecast run as opposed to state run), then the element should not be defined.

- `description` - Optional description for the activity.
- `stateConfigFile` - Optional, do not use this if a pi state description xml file is not needed. Name (and location) of the PI-XML file describing the states to be imported. This file contains all necessary information to define state type and location. The `moduleInstanceId` of the state imported is per definition the current module instance. This should be either an absolute path or a path relative to the `importDir` defined in the general section. This option reads the output state file paths from a pi state description xml file.
- `stateImportDir` - Optional state import directory. This should be either an absolute path or a path relative to the `importDir` defined in the general section. If this `stateImportDir` is specified, then the `importFile` paths in this activity can be paths relative to this `stateImportDir` instead of absolute paths. This `stateImportDir` is only needed when you want to use relative `importFile` paths. If all `importFile` paths in this activity are absolute, then this `stateImportDir` is not needed and will not be used. This option does not use a pi state description xml file.
- `stateFile` - One or more output state files from the model. The specified files will be imported. This option does not use a pi state description xml file.
- `importFile` - Path and name of an output state file from the model. This file will be imported. This should be either an absolute path or a path relative to the `stateImportDir` defined in this activity. The `%END_DATE_TIME%` tag can be used here (since 2014.02), in case the state file name contains a timestamp of the end time of the run.
- `relativeExportFile` - This relative path and name are used to store the imported file in FEWS. This path should be relative to the `stateExportDir` in the `exportStateActivity` that will be used to export this state file again for a future model run. If the imported output state file needs to be renamed

before it can be used as input state file for a future model run, then the name of the relativeExportFile can be different from the name of the importFile. The %END_DATE_TIME% tag can be used here (since 2014.02), in case the state file name contains a timestamp of the end time of the run.

- compressedStateLocation - Optional. By default the warm state is zipped and stored as a blob in the database. For large states (>50MB) it is recommended to store the data outside the database in a directory. This directory is configured in the clientConfig.xml (optional element warmStatesDirectory). When using a stand alone system or using oracle and a single MC system it is possible to store larger grids inside the database. Expired states are removed automatically from this directory by the CompactCacheFiles workflow. The state description is still written to the database, the blob field will be empty.
- expiryTime - Optional. When the state is an intermediate result in a forecast run you can make the state expire. By default the expiry time is the same as for the module instance run.
- synchLevel - Optional synch level for state. Defaults to 0 is not specified (i.e. same as data generated by the forecast run)

Configuration example:

New example that does not use a pi state description xml file. In this case, the output state file paths are configured directly in the importStateActivity as absolute paths:

```
<importStateActivity>
  <stateFile>
    <importFile>%WORK_DIR%/state.out</importFile>
    <!-- Rename imported state file so that it can be used as input state for a future model run. --
  >
    <relativeExportFile>state.inp</relativeExportFile>
  </stateFile>
  <stateFile>
    <importFile>%WORK_DIR%/state2.out</importFile>
    <!-- Rename imported state file so that it can be used as input state for a future model run. --
  >
    <relativeExportFile>state2.inp</relativeExportFile>
  </stateFile>
</importStateActivity>
```

New example that does not use a pi state description xml file. In this case, the output state file paths are configured directly in the importStateActivity as paths relative to a stateImportDir:

```
<importStateActivity>
  <stateImportDir>%WORK_DIR%</stateImportDir>
  <stateFile>
    <importFile>state.out</importFile>
    <!-- Rename imported state file so that it can be used as input state for a future model run. --
  >
    <relativeExportFile>state.inp</relativeExportFile>
  </stateFile>
  <stateFile>
    <importFile>state2.out</importFile>
    <!-- Rename imported state file so that it can be used as input state for a future model run. --
  >
    <relativeExportFile>state2.inp</relativeExportFile>
  </stateFile>
</importStateActivity>
```

Since 2017.02. Import a dynamic number of states for different state times at once. Pi state description xml file is not used. When exported the file is named "start.bin":

```
<importStateActivity>
  <stateImportDir>states</stateImportDir>
  <stateFileDateTimePattern>'state'yyyyMMddHHmm'.bin'</stateFileDateTimePattern>
  <relativeExportFile>start.bin</relativeExportFile>
</importStateActivity>
```

Old example that reads the input state file paths from a pi state description xml file. Do not use this if a pi state description xml file is not needed:

```
<importStateActivity>
  <stateConfigFile>pi_output_state_description.xml</stateConfigFile>
</importStateActivity>
```

Example of a client config for stand alone when importing to the warm states directory. The meta data is still stored in the data base. Files in this directory that don't have meta data will be automatically deleted by the rolling barrel.

```
<?xml version="1.0" encoding="UTF-8"?>
<clientConfiguration xmlns="http://www.wldelft.nl/fews" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://www.wldelft.nl/fews http://fews.wldelft.nl/schemas/version1.0/clientConfig.xsd">
  <localDataStoreFormat>Firebird</localDataStoreFormat>
  <warmStatesDirectory>%REGION_HOME%/warmStates</warmStatesDirectory>
</clientConfiguration>
```

importTimeSeriesActivity

Root element for importing scalar and polygon time series resulting from the run of the external modules. Multiple elements may be defined. importFile and timeSeriesSet should be defined.

- importFile - PI-XML file describing the time series to be imported. The file contains all information on type of data to be imported (scalar, longitudinal, grid, polygon). For all data types except the grid the file also contains the time series data. If the directory location is not explicitly specified the file will be expected to be read from the importDir defined in the general section.

importMapStacksActivity

Root element for importing grid time series resulting from the run of the external modules. Multiple elements may be defined. importFile and timeSeriesSet should be defined.

importNetcdfActivity

Imports scalar, grid or 1d/2d spectra time series from a NetCDF file resulting from the run of the external modules. All time series specified inside one importNetcdfActivity must have the same value type (grid, scalar, 1d spectra or 2d spectra). For this activity the exportPlaceholderFile option only works for scalar and grid data, not for spectra data. Note: this activity is exactly the same as importPiNetcdfActivity, only the name is better, since the NetCDF format has nothing to do with the PI format.

- **maximumSnapDistance** Since 2014.01. FEWS-10771. Optional maximum horizontal snap distance in meters. When the parser provides horizontal location coordinates (x,y) and no locationIds, then the location mapping will be done by matching the horizontal coordinates. The horizontal snap distance is the tolerance used to detect which internal and external horizontal coordinates are the same. This only works when the input format provides the coordinate system for the coordinates of the locations. When the parser does not provide the coordinates for a time series an error is logged. Note: this option has no effect for grid data. Note 2: it is not possible to import data using horizontal coordinates and using locationIds in the same importNetcdfActivity, need to define separate import activities for that (one with maximumSnapDistance and one without maximumSnapDistance).
- **maximumVerticalSnapDistance** Since 2014.02. Optional maximum vertical snap distance in meters. When the parser provides vertical location coordinates (z) and no locationIds, then the location mapping will be done by matching the vertical coordinates. The vertical snap distance is the tolerance used to detect which internal and external vertical coordinates are the same. This only works when the input format provides the coordinates of the locations. When the parser does not provide the vertical coordinates for a time series an error is logged. Note: this option currently only works for importing horizontal layers from netcdf 3D grid data. Note 2: it is not possible to import data with z-coordinates (layers from 3D grids) and data without z-coordinates (2D grids) in the same importNetcdfActivity, need to define separate import activities for that (one with maximumVerticalSnapDistance and one without maximumVerticalSnapDistance).
- **startWhileRunningExecuteActivities** Default is false. If this is true, then this importActivity will run continuously during the configured execute activities. Additionally this importActivity will also run as part of the configured import activities as normal. This way it is possible to import data that is produced by an execute activity, while it is being produced. For instance if a model run writes new output data to an existing file after each timeStep, then the continuously running importActivity will immediately import the file, including the new data. This way the new data can be viewed in FEWS as soon as it becomes available, i.e. already during the model run. Currently the data that is imported during the execute activities can only be viewed after selecting "open most recent running forecast and adjust system time" from the debug menu in the FEWS Explorer window. If the running forecast is opened and selected in the data viewer, then the displays are updated each time when new data becomes available during the run. This feature only has effect for stand alone FEWS systems and for FEWS systems that use direct database access.

Combined with workflow ensemble loop

When an importNetcdfActivity is run within an [ensemble loop](#) defined in the workflow configuration and the %ENSEMBLE_MEMBER_ID% tag is used in the <importDir> or the <importFile> it will loop over the ensemble members and use the ensemble member index for the imported scalar time series (since 2017.02).

```

<activity>
  <moduleInstanceId>ImportNetcdfScalarEnsembles</moduleInstanceId>
  <ensemble>
    <ensembleId>Ens</ensembleId>
    <ensembleMemberIndexRange start="0" end="4" />
    <runInLoop>false</runInLoop>
  </ensemble>
</activity>

```

When it is not desired that all other activities are also run for each ensemble member, make sure `<runInLoop>` is set to false.

This is useful when 1 general adapter run generates many similar ensemble files that do not contain data from which their ensemble id can be determined besides their file name or their parent directories. Like a run from OpenDA.

importPiNetcdfActivity

Deprecated, do not use. Please use `importNetcdfActivity` instead. Imports scalar, grid or 1d/2d spectra time series from a NetCDF file resulting from the run of the external modules. All time series specified inside one `importPiNetcdfActivity` must have the same value type (grid, scalar, 1d spectra or 2d spectra). For this activity the `exportPlaceholderFile` option only works for scalar and grid data, not for spectra data. For more documentation see `importNetcdfActivity`.

importProfilesActivity

Root element for importing longitudinal profile time series resulting from the run of the external modules. Multiple elements may be defined. `importFile` and `timeSeriesSet` should be defined.

Optional description of import activity. Used for reference purposes only

importShapeFileActivity

Root element for importing shape files resulting from the run of the external modules.

A `<shapeFileImportDir>` can be defined which is either relative (to the general `<importDir>`) or absolute. When it is not defined the general `<importDir>` will be used. If the defined directory does not exist, an exception will be thrown. The import directory can be empty.

A `<fileDateTimePattern>` should be defined to filter out the shape files that need to be imported and to extract the time for the shape in the time series. If the directory is not empty, but none of the files match the defined pattern, an exception will be thrown.

A `<geoDatum>` can be defined if the shape file is not in WGS84. When this is defined, a conversion to WGS84 will take place before storing the time series into the database.

The `<timeSeriesSet>` will automatically be used for the imported shape, no idmapping will take place.

```

<importActivities>
  <importShapeFileActivity>
    <shapeFileImportDir>import</shapeFileImportDir>
    <fileDateTimePattern>'ImportShapeFileActivity_'dd MMM yyyy HH mm ss'.shp'<
/fileDateTimePattern>
    <geoDatum>EPSG:102736</geoDatum>
    <timeSeriesSet>
      <moduleInstanceId>ImportShapeActivity</moduleInstanceId>
      <valueType>polygon</valueType>
      <parameterId>par</parameterId>
      <locationId>Polygon</locationId>
      <timeSeriesType>external historical</timeSeriesType>
      <timeStep unit="nonequidistant" />
      <readWriteMode>read only</readWriteMode>
    </timeSeriesSet>
  </importShapeFileActivity>
</importActivities>

```

importCsvModuleRunTablesActivity (since 2015.01)

Root element for importing csv files that can be displayed using the [Module Run Table Display](#) component.

Elements of the `importCsvModuleRunTablesActivity` section.

- `charset` - Optional charset used for reading the csv file. Defaults to ISO-8859-1.
- `description` - Optional description only used for reference.
- `importFile` - Path and name of a csv file from the model. This file will be imported.
- `displayName` - name used to display the import file name in the `ModuleRunTableDisplay` component.

- table - mapping of column names to displayName and types that will be used to store into FEWS. If a column isn't mapped the csv column name is used as displayName and String is used as column type. The following types can be mapped using the name attribute to map a csv column name to a displayName:
 - stringColumn - set the column type to string.
 - booleanColumn - set the column type to boolean. Only the values 'true' and 'false' are allowed.
 - integerColumn - set the column type to integer.
 - doubleColumn - set the column type to double.
 - dateTimeColumn - set the column type to dateTime. In case a date pattern is specified, the string will be parsed according this format. If no format was specified, a timestamp is assumed in milliseconds.

Only columns that are mapped will be imported. The imported values will be stored in the order of the configured column mappings.

Configuration example:

In the following example one importCsvModuleRunTablesActivity is specified for the import file import_csv_module_test1.csv. In case more than one csv file has to be imported, for each csv file an activity has to be configured. Note that in this example the csv column 'Float' hasn't been mapped. This will result in not importing the 'Float' column values.


```

<importActivities>
  <importCsvModuleRunTablesActivity>
    <charset>UTF-8</charset>
    <description>Csv Module Data Activity Test case.</description>
    <importFile>import_csv_module_test1.csv</importFile>
    <displayName>Import CSV Module Test1</displayName>
    <table>
      <!-- Map de following CSV definition:
      DateTime;Status;Boolean;Integer;Float;Double;
String
1
world 2
HH:ss" />
      -->
      <dateTimeColumn name="DateTime" displayName="datum" pattern="yyyy-MM-dd
      <stringColumn name="Status" displayName="status field"/>
      <booleanColumn name="Boolean" displayName="Yes or No"/>
      <integerColumn name="Integer" displayName="Int field"/>
      <doubleColumn name="Double" displayName="Double field"/>
      <stringColumn name="String" displayName="String field"/>
    </table>
  </importCsvModuleRunTablesActivity>
</importActivities>

```

If errors have been made in the mapping of the csv table, one warning will be logged per column to avoid flooding the log file with warnings. The import will always continue and a empty value will be set. The exceptions are Booleans that will be set to false and dateTimes will be set to 0.

Shutdown Activities

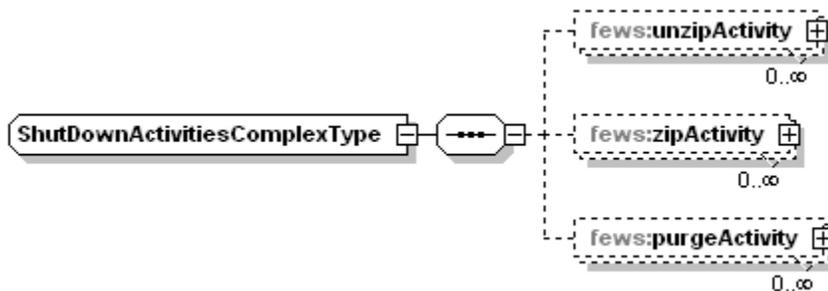

Elements of the Shutdown Activities configuration

This activity is the identical to the startUpActivities. The only difference is that these are carried out after the module run and import of data. See definition of StartUp activities for configuration.

ignoreNonExistingLocationSets

```

<command> <className>nl.wldelft.fews.adapter.urbsiniadapter.UrbsIniAdapter</className> <customJreDir>%ROOT_DIR%/jre</customJreDir> <jvmArg>-mx512m</jvmArg> </command>

```